


**Neff - T41B30X2**  
**Electric cooktop**

**Electric cooktop with integrated controls**


- frameless with front faceted glass
- 60 cm width
- 4 induction zones
- Power boost for all induction zones
- TouchControl with Timer
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- Main switch with stop-function
- Childproof lock
- Re Start Function
- Quick Start Function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- connecting value 4600 W
- 1 Indicator light
- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power level 2.5 KW) Induction heating; 1 x Ø 180 mm, 1.8 KW (max. Power level 2.5 KW) Induction heating; 1 x Ø 210 mm, 2.2 KW (max. Power level 3.7 KW) Induction heating; 1 x Ø 145 mm, 1.4 KW (max. Power level 1.8 KW) Induction heating

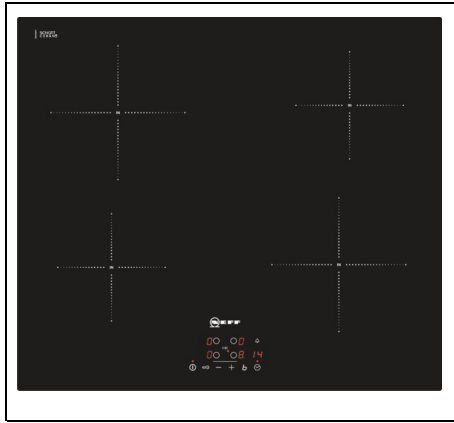

**Neff - T40B31X2GB**  
**Electric cooktop**

**Electric cooktop with integrated controls**


- Frameless design
- 60 cm width
- 4 induction zones
- TouchControl with Timer
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- Main switch with stop-function
- Childproof lock
- Quick Start Function
- Re Start Function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- connecting value 2990 W
- 1 Indicator light
- Kochzonen: 1 x Ø 145 mm, 1.4 KW Induction heating; 1 x Ø 180 mm, 1.8 KW Induction heating; 1 x Ø 180 mm, 1.8 KW Induction heating; 1 x Ø 145 mm, 1.4 KW Induction heating

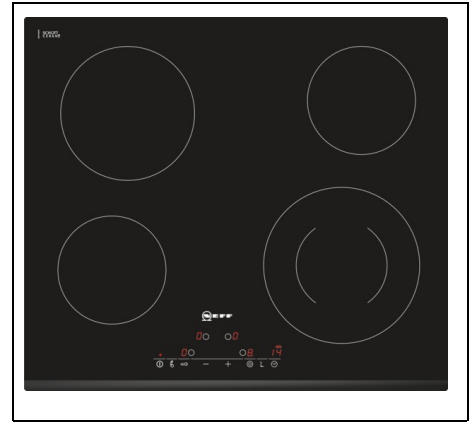

**Neff - T11D41X2**  
**Electric cooktop**

**Electric cooktop with integrated controls**


- frameless with front faceted glass
- 60 cm width
- 4 zone ceramic hob
- 1 dual circuit zone
- Zone extension activation with a Touch sensor on the hob
- Digital display
- TouchControl with Timer
- Alarm clock
- 2 stage residual heat indicator per cooking zone
- Warming function for all cooking zones
- Wipe protection function
- Main switch with stop-function
- Re Start Function
- Childproof lock
- Automatic Safety switch-off
- Individual tunable energy consumption display
- connecting value 6600 W
- Number of operating lights: 1 PC
- Cooking zones  
front left: Ø 145 mm, 1.2 KW  
rear left: Ø 180 mm, 2 KW  
rear right: Ø 145 mm, 1.2 KW  
front right: Ø 210 mm, 120 mm, 0.75 KW, 2.2 KW

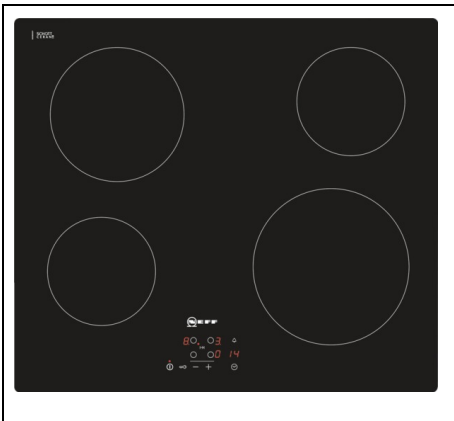

**Neff - T10B40X2**  
**Electric cooktop**

**Electric cooktop with integrated controls**

- Frameless design
- 60 cm width
- 4 zone ceramic hob
- TouchControl with Timer
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- Childproof lock
- Main switch with stop-function
- Re Start Function
- Automatic Safety switch-off
- Power on indicator light
- Main switch
- connecting value 6600 W
- Number of operating lights: 1 PC
- Cooking zones  
front left: Ø 145 mm, 1.2 KW  
rear left: Ø 180 mm, 2 KW  
rear right: Ø 145 mm, 1.2 KW  
front right: Ø 210 mm, 2.2 KW

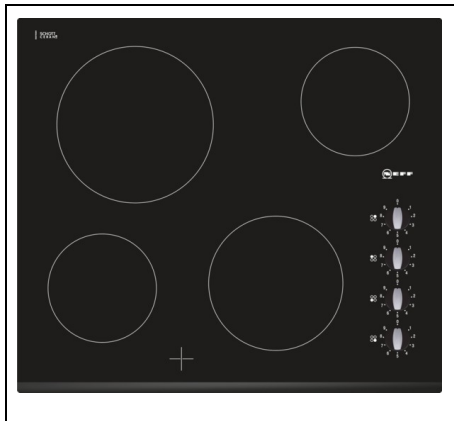

**Neff - T11K40X2**  
**Electric hotplate**

**Electric cooktop with integrated controls**

- frameless with front faceted glass
- 60 cm width
- 4 zone ceramic hob
- controls positioned at the right side
- Residual heat indicator for each zone
- connecting value 6600 W
- Cooking zones  
front left: Ø 145 mm, 1.2 KW  
rear left: Ø 210 mm, 2.2 KW  
rear right: Ø 145 mm, 1.2 KW  
front right: Ø 180 mm, 2 KW



**Neff - N54D30N2**  
**Electric cooktop**

**Electric cooktop with integrated controls**

- Design frame
- 30 cm width
- 2 induction zones
- 1xFlexInduction with 2 using possibilities: 2 single induction cooking zones with 190x200 mm each one or one flexible induction cooking zone with 380x200 mm
- TouchControl with Timer
- Power boost for all induction zones
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- Sensor button to turn on or off the FlexInduction zone
- Main switch with stop-function
- warming function for all cooking zones
- Childproof lock
- Wipe protection function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- connecting value 3600 W
- 1 Indicator light
- Cooking zones: 1 x 380x200 mm, 3.3 KW (max. Power level 3.6 KW) Induction heating or 2 x 190x200 mm, 2.0 kW (max. Power level 2.5 kW) Induction heating