


Neff - T51T86X2

Electric cooktop

Electric cooktop with integrated controls

- Front facette design
- 80 cm width
- 5 induction zones
- 1 x FlexInduction with 2 using possibilities: 2 single induction cooking zones with 190x200 mm each one or one flexible induction cooking zone with 380x200 mm.
- Power boost for all induction zones
- Point&Twist with Timer
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- Sensor button to turn on or off the FlexInduction zone
- Warming function for all cooking zones
- Main switch with stop-function
- Childproof lock
- Wipe protection function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- 1 Indicator light
- connecting value 7200 W
- Cooking zones: 1 x 380x200 mm, 3.3 KW (max. Power 3.6 KW) Induction heating or 2 x 190x200mm, 2.0 kW (max. Power 2.5 kW) Induction; 1 x Ø 240 mm, 2.2 KW (max.

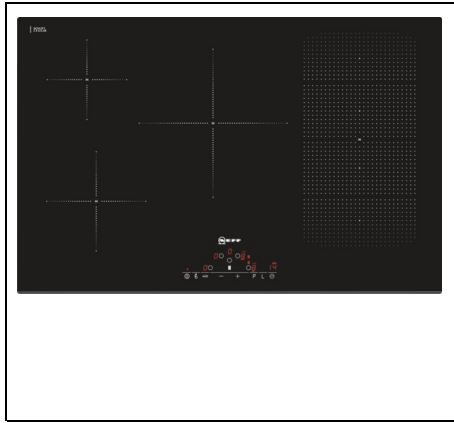

Neff - T51D86X2

Electric cooktop

Electric cooktop with integrated controls

- Front facette design
- 80 cm width
- 5 induction zones
- 1 x FlexInduction with 2 using possibilities: 2 single induction cooking zones with 190x200 mm each one or one flexible induction cooking zone with 380x200 mm.
- TouchControl with Timer
- Power boost for all induction zones
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- Sensor button to turn on or off the FlexInduction zone
- Main switch with stop-function
- Childproof lock
- Wipe protection function
- Re Start Function
- Quick Start Function
- Energy consumption display
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- 1 Indicator light
- connecting value 7200 W
- Cooking zones: 1 x 380x200 mm, 3.3 KW (max. Power 3.6




Neff - T45D82X2

Electric cooktop

Electric cooktop with integrated controls

- Frameless for flushline installation in natural stone or tiled work surface
- 80 cm width
- 5 induction zones
- Power boost for all induction zones
- TouchControl with Timer
- Alarm clock
- Digital display
- Re Start Function
- Quick Start Function
- Energy consumption display
- 2 stage residual heat indicator per cooking zone
- Sensor button to turn on or off the FlexInduction zone
- Main switch with stop-function
- Childproof lock
- Wipe protection function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power level 2.8 KW) Induction heating; 1 x Ø 145 mm, 1.4 KW (max. Power level 1.8 KW) Induction heating; 1 x Ø 240 mm, 2.2 KW (max. Power level 3.7 kW) Induction heating; 1 x Ø 210 mm, 2.2 KW (max. Power level 3.7 KW) Induction heating; 1

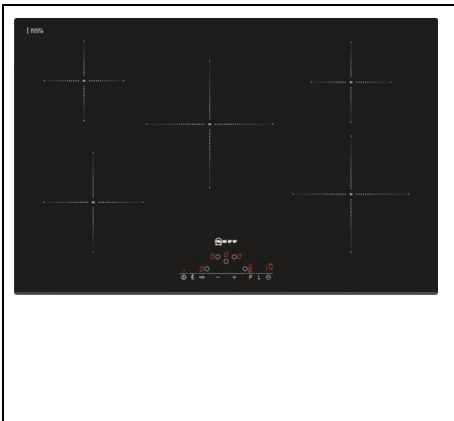


Neff - T41D82X2

Electric cooktop

Electric cooktop with integrated controls

- Front facette design
- 80 cm width
- 5 induction zones
- Power boost for all induction zones
- TouchControl with Timer
- Alarm clock
- Digital display
- Re Start Function
- Quick Start Function
- Energy consumption display
- 2 stage residual heat indicator per cooking zone
- Sensor button to turn on or off the FlexInduction zone
- Main switch with stop-function
- Childproof lock
- Wipe protection function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power level 2.8 KW) Induction heating; 1 x Ø 145 mm, 1.4 KW (max. Power level 1.8 KW) Induction heating; 1 x Ø 240 mm, 2.2 KW (max. Power level 3.7 kW) Induction heating; 1 x Ø 210 mm, 2.2 KW (max. Power level 3.7 KW) Induction heating; 1 x Ø 145 mm, 1.4 KW (max. Power level 1.8 KW) Induction

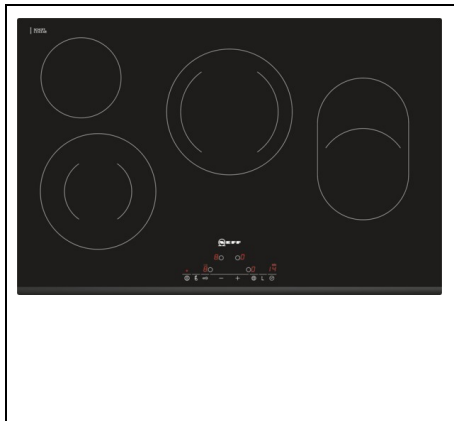

Neff - T11D83X2

Electric cooktop

Electric cooktop with integrated controls

- frameless with front faceted glass
- 80 cm width
- 4 zone ceramic hob
- 2 dual circuit zones
- 1 extendable zone
- Zone extension activation with a Touch sensor on the hob
- Digital display
- TouchControl with Timer
- Alarm clock
- 2 stage residual heat indicator per cooking zone
- Warming function for all cooking zones
- Wipe protection function
- Main switch with stop-function
- Re Start Function
- Childproof lock
- Automatic Safety switch-off
- Individual tunable energy consumption display
- connecting value 7400 W
- Number of operating lights: 1 PC
- Cooking zones
 - front left: Ø 210 mm, 120 mm, 2.2 KW, 0.75 KW
 - rear left: Ø 145 mm, 1.2 KW
 - rear center: Ø 230 mm, 180 mm, 2.4 KW, 1.5 KW
 - front right: Ø 170 mm, 265 mm, 1.8 KW, 2.6 KW