


Neff - T54T97N2

Electric cooktop

Electric cooktop with integrated controls

- 90 cm width
- 5 induction zones
- 2 x FlexInduction with 2 using possibilities: 4 single induction cooking zones with 200x240 mm each one or two flexible induction cooking zone with 400x240 mm and 1 x FlexInduction with 300x 240 mm.
- Power boost for all induction zones
- Point&Twist with Timer
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- warming function for all cooking zones
- Sensor button to turn on or off the FlexInduction zone
- Main switch with stop-function
- Childproof lock
- Wipe protection function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- connecting value 10800 W
- 1 Indicator light
- Cooking zones: 2 x 400x240 mm, 3.3 KW (max. Power level 3.6 KW) Induction heating or 4 x 200x240 mm, 2.0 kW (max. Power level 2.5 kW) Induction and 1x 300x240mm,

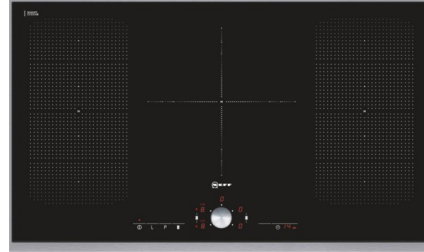


Neff - T54T95N2

Electric cooktop

Electric cooktop with integrated controls

- Design frame in Stainless steel
- 90 cm width
- 5 induction zones
- 2xFlexInduction with 2 using possibilities: 2 single induction cooking zones with 190x200 mm each one or one flexible induction cooking zone with 380x200 mm
- Power boost for all induction zones
- Point&Twist with Timer
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- Sensor button to turn on or off the FlexInduction zone
- Main switch with stop-function
- Childproof lock
- warming function for all cooking zones
- Wipe protection function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- connecting value 10800 W
- 1 Indicator light
- Cooking zones: 2 x 380x200 mm, 3.3 KW (max. Power level 3.6 KW) Induction heating or 4 x 190x200mm, 2.0 kW (max. Power level 2.5 kW) Induction; 1 x Ø 260 mm, 210 mm, 320

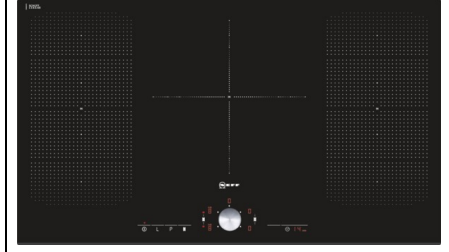


Neff - T51T95X2

Electric cooktop

Electric cooktop with integrated controls

- Front facette design
- 90 cm width
- 5 induction zones
- 2xFlexInduction with 2 using possibilities: 2 single induction cooking zones with 190x200 mm each one or one flexible induction cooking zone with 380x200 mm
- Power boost for all induction zones
- Point&Twist with Timer
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- Sensor button to turn on or off the FlexInduction zone
- Main switch with stop-function
- Childproof lock
- warming function for all cooking zones
- Wipe protection function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 110 cm
- connecting value 10800 W
- 1 Indicator light
- Cooking zones: 2 x 380x200 mm, 3.3 KW (max. Power level 3.6 KW) Induction heating or 4 x 190x200mm, 2.0 kW (max. Power level 2.5 kW) Induction; 1 x Ø 260 mm, 210 mm, 320

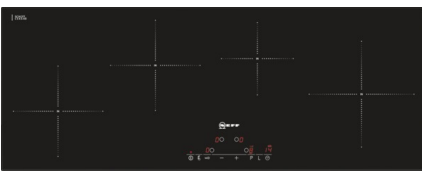

Neff - T45D90X2

Electric cooktop

Electric cooktop with integrated controls

- 90 cm width
- In-Line Design
- Frameless for flushline installation in natural stone or tiled work surface
- with special accessorie also in wooden worksurfaces
- 4 induction zones
- Power boost for all induction zones
- TouchControl with Timer
- Alarm clock
- Energy consumption display
- Quick Start Function
- Re Start Function
- Digital display
- 2 stage residual heat indicator per cooking zone
- Main switch with stop-function
- Childproof lock
- Wipe protection function
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 166 cm
- connecting value 7200 W
- 1 Indicator light
- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power level 2.8 KW) Induction heating; 1 x Ø 180 mm, 1.8 KW (max.



Neff - T41D90X2

Electric cooktop

Electric cooktop with integrated controls

- frameless with front faceted glass
- 90 cm width
- 4 induction zones
- Power boost for all induction zones
- TouchControl with Timer
- Alarm clock
- Digital display
- 2 stage residual heat indicator per cooking zone
- Main switch with stop-function
- Childproof lock
- Re Start Function
- Quick Start Function
- Energy consumption display
- Powermanagement function
- Automatic Safety switch-off
- Length connecting cable 166 cm
- connecting value 7200 W
- 1 Indicator light
- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power level 2.8 KW) Induction heating; 1 x Ø 180 mm, 1.8 KW (max. Power level 2.8 KW) Induction heating; 1 x Ø 210 mm, 2.2 KW (max. Power level 3.7 KW) Induction heating; 1 x Ø 145 mm, 1.4 KW (max. Power level 1.8 KW) Induction heating