Solutions

General Catalogue 2025/2026 — EN



falmec


falmec



Index A— Z

| 020 | Elements | | | | |
|-----|---------------------------------|-----|--------------------------------|-----|-----------------------|
| 042 | Brooklyn | 032 | Monolith | 022 | Shelf |
| | | | | | |
| 048 | Cooking | | | | |
| 050 | Brera | 088 | Induction hobs | 060 | Zero |
| 058 | Brera 75 | | 58/78/88/90 cm | 070 | Zero Easy |
| 082 | Level One | 072 | Quantum Pro | | • |
| | | 080 | Quantum Pro Easy | | |
| 100 | Air | | | | |
| | | | | | |
| 150 | Alba | 108 | Level | 284 | Quasar |
| | | 104 | Level Invisible | | |
| 146 | Built-in | 188 | Light | 210 | Soffio |
| | | 254 | Luce | 218 | Sophie |
| 266 | Cover | 250 | Lumen | 225 | Sophie Lamp |
| | | 192 | Lumen Isola 175 | 178 | Spazio |
| 226 | Dama | 195 | Lumen Isola 175 NRS | 183 | Spazio 130 |
| 112 | Down Draft | 253 | Lumen NRS | 172 | Stella |
| | | 246 | Lumina NRS | 296 | Stream |
| 308 | Elios | | | | |
| 196 | Elle | 230 | Mare E.ion | 280 | Tab |
| 184 | Europa 175 | 300 | Marte Pro | | |
| | • | 292 | Mercurio | 154 | Vega |
| 288 | Flipper | 260 | Mira | 274 | Verso |
| 291 | Flipper NRS | 168 | Mirage | 278 | Verso Easy |
| 270 | Fusion | 298 | Mizar | 279 | Verso NRS |
| | | 126 | Move | 206 | Vetra |
| 310 | Ginevra Boston | | | 124 | Virgola |
| 132 | Gruppo Incasso | 164 | Nube | 118 | Virgola Touch |
| 142 | Gruppo Incasso Murano | 158 | Nuvola | 122 | Virgola Touch NRS |
| 140 | Gruppo Incasso NRS | 162 | Nuvola 140 | 121 | Virgola No-Drop Touch |
| 144 | Gruppo Incasso No-Drop | | | 214 | Vogue |
| 138 | Gruppo Incasso Pro | 128 | Parallel | | 1.5 |
| | от орро толого | 238 | Plane | 200 | Zenith NRS |
| 234 | Laguna | 244 | Plane No-Drop | 304 | Zeus Pro |
| 202 | Levante | 243 | Plane NRS | | 2000110 |
| | 25vanto | 256 | Polar | | |
| | | | | | |
| | | | | | |
| 312 | Technical notes and accessories | | | | |
| 314 | Filtration or extraction | 326 | Motors | 332 | Cooking installation |
| 316 | Filtering innovation | 328 | Installation | 333 | Cooking accessories |
| 318 | Anti-odour filter kits | 329 | Installation options | 334 | Extensions |
| 321 | Anti-odour filters | | for ceiling hoods | 335 | Use and maintenance |
| 322 | Filter table | 330 | Ducting accessories | | |
| 325 | Anti-grease filters | 331 | Conveyers for filtering models | | |

Index

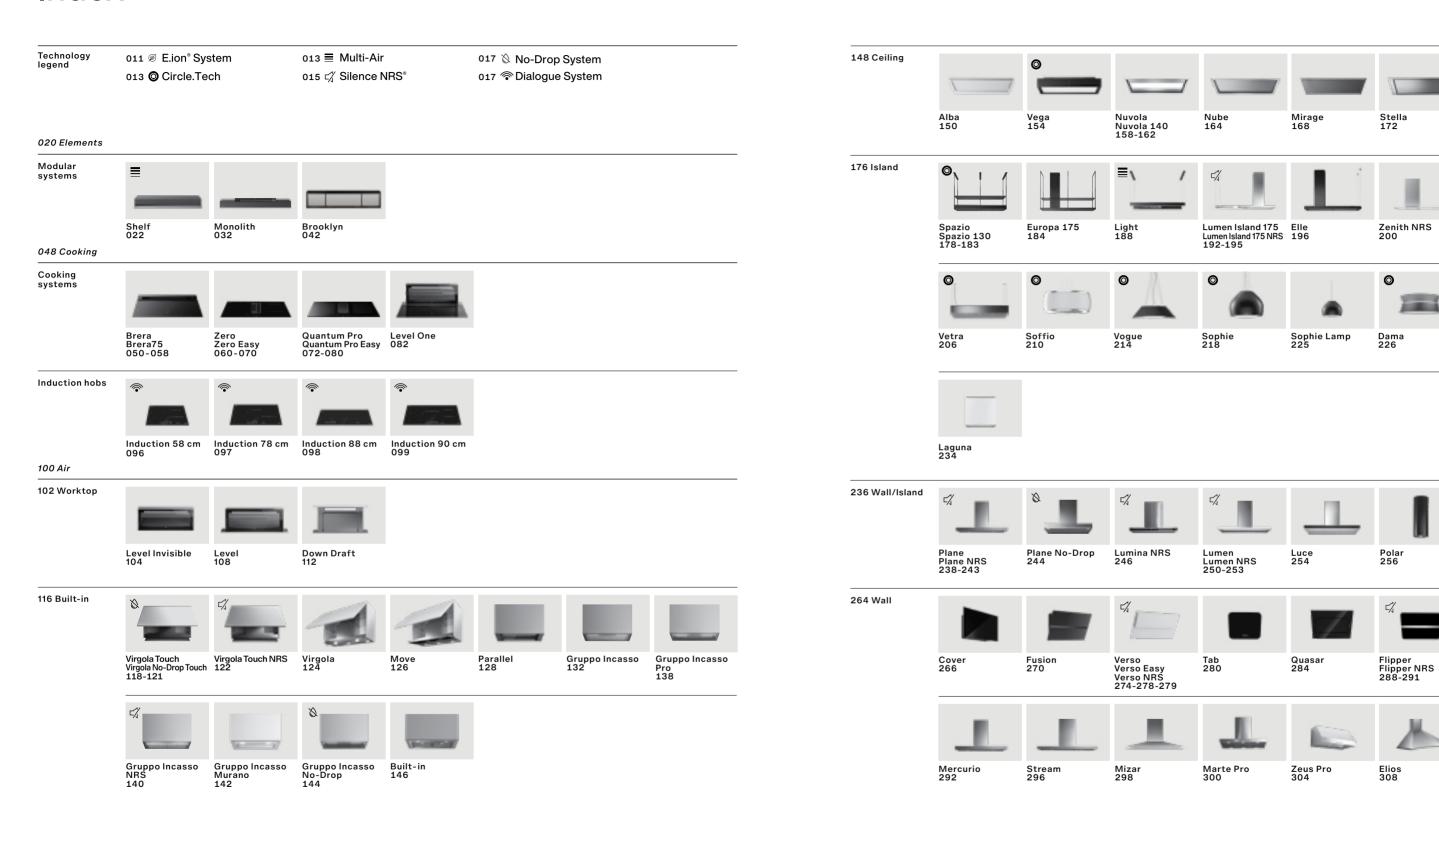

Levante 202

Mare E.ion 230

Mira 260

Ginevra Boston 310

004 Falmec 005



Genius. Experience. Research. Passion. Attention

Innovation is in the air: solutions for a new quality of life

Thanks to a decade-long evolution of technology and design, that has transformed new needs and lifestyles into concrete solutions that improve everyday life, Falmec has become an industry benchmark when it comes to kitchen aspiration.

A product culture: the real made in Italy

Every Falmec product is conceived, developed and manufactured entirely in Vittorio Veneto, near Venice. In this area, known as the "stainless steel valley", artisanal traditions have evolved into one of the most important steel processing industrial districts in Italy. Falmec combines its knowledge of raw materials and unique personal skills with advanced industrial processes. Its shared product culture is expressed through the perfect balance between creativity and practicality, giving life to achievements of excellence in which every detail counts.

Sustainability: respect for man and nature

As a family business, Falmec has never lost sight of certain distinctive fundamental values: its cultural roots, its ties to the territory, and its people. Sustainability is therefore expressed within a general development model that is in tune with the community within which the company operates. On one hand, Falmec's focus is on rendering its production increasingly green by fuelling it with renewable energy sources, while on the other it is carrying out on-going research aimed at creating long-lasting products and environmentally friendly technological solutions.

This mission is not limited to improving the quality of the air that we breathe in our homes, but it also helps in safeguarding humanity, the atmosphere and the planet's natural resources.





Technology and innovation for us all

Falmec transforms a growing desire for well-being, health and comfort in the home into concrete solutions and products that are aimed at the senses: its hoods satisfy our smell, sight, hearing, touch and - with their cooking solutions taste too. Falmec has always backed up its decades of production experience with research and the development of patented technologies, thus setting new milestones in improving quality of life at home.

009 Technology



Breathing well, living better

When thinking about the air that we breathe, it is often the outdoor environments that come to mind. However bacteria, mould, viruses, pollen and other harmful substances can spread inside your very own home, particularly in the kitchen. Odours and moisture can also compromise your living comfort. In response, Falmec has developed cutting-edge technological solutions that filter and purify the air, while guaranteeing complete silence.

𝒯 E.ion[®] System: the only technology that is able to sanitise the air

Thanks to controlled bipolar ionisation, our E.ion System equipped hoods release ions into the environment that are able to produce air quality that is comparable with that of the highest mountains or Amazon rainforests. In this way, in addition to neutralising bad smells, irritants and pollutants, our hoods' filtered and ionised air also has a positive effect on your psychological well-being, helping you to concentrate and even lifting your mood.

Our E.ion System equipped hoods have a leaf-shaped sensor that detects the presence of volatile organic compounds (VOCs), odorous gases, formaldehyde, cigarette smoke and other pollutants in the environment. When the sensor detects a worsening of these parameters, it turns vellow in colour, and the hood automatically activates and begins purifying and sanitising the air through controlled bipolar ionisation. Once conditions within the space have improved, the leaf turns green again: an excellent way of monitoring the air quality in your kitchen at all times.







E.ion System technology, as well as its adaptation to Falmec aspiration systems, is protected by international patents and certifications from authorised bodies. Tests carried out at the universities of Udine and Milan, in accordance with the UNI EN 13725:2004 standard, confirmed a reduction of between 70% and 95% of unpleasant odours.



011

Innovation is in the air

Technologies for better air Falmec presents exclusive and patented technological solutions for optimal functionality and performance. Falmec hoods, both in filtering and suction mode, meet one of our basic needs: to breathe. In-depth research, detailed design and unique technological solutions allow for optimal performance efficiency, guaranteeing the highest quality air in any space. The focus on environmental issues and air quality in the home has prompted Falmec to develop its own filtration technologies that can guarantee to us all the benefits derived from recirculation solutions, without compromising suction performance and air sanitisation.

Starbon.Zeo: filtration according to nature

Carbon.Zeo filters contain natural materials such as activated carbon and zeolite, a mineral of volcanic origin, with a crystalline molecular structure that absorbs fumes and bad odours. What's more, zeolite generates heat when it comes into contact with vapour flows, helping to reduce the moisture that is created when cooking. The Carbon.Zeo combined filter comes with a minimum 3-year guarantee, and has an estimated maximum life of 5 years of normal hood use.

Circular filter

Metal grease

with Carbon.Zeo technology

about our Circle.Tech



© Circle. Tech: filtration has a new form

Circle. Tech technology represents a change in perspective when compared to traditional hoods, in that it extends horizontally rather than vertically. Its circular shape allows you to obtain the largest filtering surface in small spaces, without forgoing excellent performance in terms of suction, filtration and reduced noise. With Circle. Tech, fumes do not have to be ducted, rendering it therefore not only versatile, but also simple to install in any space.

The air is purified and cooking odours and moisture are eliminated thanks to the Carbon.Zeo combined filter. In addition, Circle. Tech's reduced size and volume allows for the realisation of models of hood that are limited in height, in line with the latest design trends.

Air outlet

Centrifuga motor with


blades for high aspiration

Air inlet

■ Multi-Air: effective filtration with ultra-compact dimensions

Multi-Air technology has revolutionised the traditional concept of suction - which normally concentrates on a single point by dividing it between multiple ultracompact horizontally distributed motors. Suction is thus spread out and, with a component height of just 10 cm, takes up very little space. The advantages are manifold: increased silence, homogeneous suction and, last but not least, a design with reduced height and thickness, in line with contemporary aesthetic tastes. Our Multi-Air hoods are also equipped with exclusive Carbon.Zeo filters that combine the natural properties of zeolite and carbon to better absorb the organic compounds of cooking and water vapour.







012 013 **Falmec** Technology



Absolute silence for you to enjoy

Silence, or reduced noise in our living spaces, is a factor that is fundamental to our well-being, which is often overlooked. This is especially true when it comes to the kitchen, where there may be a number of activities taking place or people gathering, sharing moments of warmth and conviviality. The Falmec models that are equipped with Silence NRS available for both extractor hoods and technology guarantee extremely quiet operation thanks to air flow optimisation which reduces turbulence - as well as the application of specific soundabsorbing materials.

Silence NRS®: the importance of acoustic comfort


The extreme power of the hood motor is often exacerbated by an equally loud operating noise. Falmec has succeeded in combining the highest levels of performance and acoustic well-being with its Silence NRS (Noise Reduction System) technology, a system that was developed in collaboration with laboratories specialising in fluid dynamics, making it possible to create incredibly silent hoods.

Noise 68 70 60 50 Standard hood 40 NRS hood 30 aspiration speed decibel

015

Auditory perception works on a logarithmic scale, in which a reduction of 1 decibel in sound corresponds to a 20% decrease in noise. Thanks to research into airflow and the application of materials, Silence NRS hoods are able to reduce noise by up to 86%, making them practically silent. A unique innovation in its market, it is filtering hoods, with a long lasting, reconditionable high-performance carbon filter.



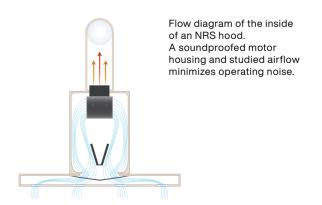



Technology that simplifies everyday life

Technology is increasingly catering for a range of needs in the home, satisfying desires and simplifying gestures. In line with this trend, Falmec has identified solutions that make life in the kitchen more practical, transforming it into a pleasant and rewarding experience.

and eliminates condensation

Our No-Drop System is an innovative technology that prevents the formation of condensation caused by cooking vapour, an unpleasant yet common occurrence, especially when using induction hobs. The No-Drop System consists of a set of cross-bladed filters designed to condense vapour and funnel it into a special collector. The result is a dry and healthy kitchen environment.





Learn more about our No-Drop System

Pialogue System: connecting your hood and hob

The Dialogue System allows you to control hood functions directly from the hob through its integrated touch control and wireless radio frequency connection. Therefore, no other receiving devices need to be installed in the hood, and you can directly control air intake without having to remove your hands or look away from the hob.

The Dialogue System works using radio frequencies, and connects directly with Falmec hoods, which are specially designed to interact with this technology. Falmec induction hobs equipped with the Dialogue System have a touch slider control panel with a display that allows you to keep all your cooking and suction functions under control with a single glance. In addition, its automatic function allows suction power to be adjusted as required, thereby optimising consumption and performance.

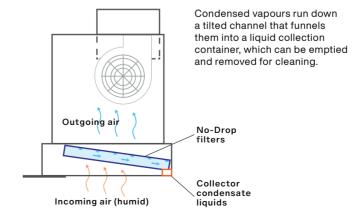



Cross-blade filter profile with vapour condensation

Falmec style: the perfect balance between style and function

Falmec has developed a true stylistic identity that best balances aesthetic and ergonomic values without compromising functionality. Falmec's technological development opens up new horizons in design, giving space to creativity and beauty. From research carried out by the Falmec Lab and collaborations with contemporary design protagonists, our designs are conceived to fit into the broadest range of architectural and furnishing contexts, offering the perfect solution for every space, taste and desire. Falmec remains attentive to current requirements while anticipating the trends of tomorrow, creating products that meet real needs, all the while expressing its original and charming personality.

Design world awards

Falmec's design abilities have been confirmed by the most relevant design bodies and associations, winning countless awards over the years, of which the Compasso d'Oro in 2020 - for its Spazio model designed by Francesco Lucchese certainly stands out. This prize, which is awarded following careful consideration by the ADI Permanent Design Observatory, is aimed at promoting and exporting Made in Italy design quality on a global level, and has resulted in Falmec being included the Prize's historical collection at the ADI Design Museum in Milan. A prestigious achievement to add to numerous other international awards won by Falmec products, such as the Good Design Award, the Archiproducts Design Award, the Iconic Award and the Red Dot Design Award.





ADI DESIGN INDEX



























Design your world

The living space expands. The rules of kitchen design are rewritten, unleashing creativity. Linear modules, which can be arranged according to the attitudes and habits of those who use them, completely integrate their suction function within

minimal forms designed to accommodate accessories, lighting elements and support surfaces. Elements revolutionises the concept of aspiration, opening new horizons in design, creating new spaces and furnishing architecture in the kitchen.

Shelf

Suction shelf

Thanks to exclusive Multi-Air technology, Shelf incorporates a very thin suction element in a shelf structure of only 10 cm in thickness, equipped with a removable vane to increase smoke suction capacity. This element with hood function can be enriched with additional modules

to create a versatile hanging furniture system on the wall.

The extracting version is equipped with a remotely located motor: a solution that ensures both, power and silence.



More information on Shelf








Modularity

The 120 cm filtering or extraction module can be attached to the right or left of other shelves with a width of 60 and 90 cm. This makes it possible to compose a true wall-mounted furnishing system, with integrated LED lighting that not only provides functional illumination of the kitchen top, but also contributes to creating an evocative ambiance in the room.

Shelf

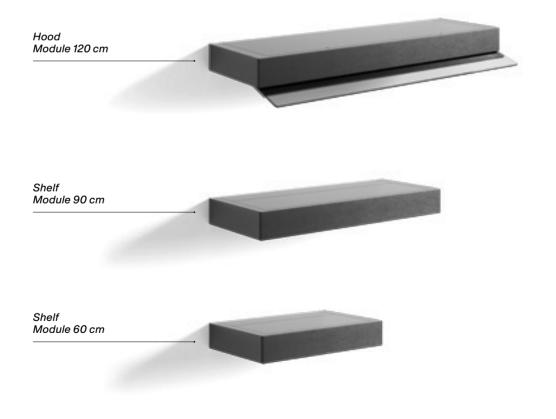



Shelf 024 Falmec 025

Customisation

The front panel can be customised by choosing different materials and finishes: from the technological beauty of steel to the warmth of wood, the elegance of glass, and the practicality of melamine in a wide range of colours, to match every personal taste and furnishing style in the kitchen.

Shelf







Falmec 027 Shelf 026

Shelf Monolith Brooklyn Index A— Z

Shelf (extracting)

Design Falmec Lab

Wall Installation **Function** Extracting

Dimensions

Hood module 120 cm Accessory module 60 cm/90 cm

Materials/Finishes Painted steel black

Frontal panel black aluminium/customizable



Features Extractable tempered glass flap with integrated touch control

Emptyable liquid collector

Modular system

No-Drop System anti-condensation technology

Touch control Control

3 + boost Speed

Min. speed 49 dB(A) Sound level

Max. speed 62 dB(A) Motor sold separately

Filters

Anti-condensation no-drop filter in technopolymer

Dynamic Light Lighting

Strip LED - 2700 K / 5600 K

220-240V 50-60Hz Voltage/Frequency

Net weight 23 kg Energy class

Data with motor 950 m3/h

Motor




| Code | Description |
|-------------------------------|--|
| 8034122365299 | Shelf - Extracting hood body - Wall - 120 cm - Black |
| 8034122365305 | Shelf - Extracting hood body - Wall - 120 cm - Customisable front panel* |
| 8034122713595 | Shelf - Accessory module 60 cm - Black |
| 8034122713649 | Shelf - Accessory module 60 cm - Customisable front panel* |
| 8034122713601 | Shelf - Accessory module 90 cm - Black |
| 8034122713656 | Shelf - Accessory module 90 cm - Customisable front panel* |
| Motors | |
| KACL.798#41F | Remote under-roof motor 950 m3/h |
| KACL.786#41F | Outdoor extractor fan 1000 m3/h |
| Accessories | |
| KACL.458#3F | Plant basin Shelf 90 cm |
| KACL.459#3F | Plant basin Shelf 60 cm |
| KACL.1029#HF | Kit end covers |
| *Panel customisable by client | |




Shelves Module 90 cm KACL.452#NF

Shelf extracting version



* Measures including lateral end covers (1 mm + 1 mm)

Side view with front panel




*Min. frontal panel thickness: 3 mm Max. frontal panel thickness: 25 mm


Side view without front panel

(customisable version*)


368 490




Module 60 cm KACL.451#NF




Configuration example 8034122713595 + 8034122365299 + 8034122713601

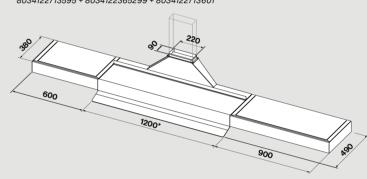


Accessories Plant basin for shelf 90 cm KACL.458#3F



Plant basin for shelf 60 cm KACL.459#3F



Tablet holder (included in the hood module)



Plant basin's depth 50 mm

Shelf Monolith Brooklyn Index A— Z

Shelf (filtering)

Design Falmec Lab

Wall Installation Filtering **Function**

Dimensions

Hood module 120 cm Accessory module 60 cm/90 cm

Materials/Finishes Painted steel black

Frontal panel black aluminium/customizable



Features Extractable tempered glass flap with integrated control

Modular system Multi-Air technology

Control Touch control 3 + boost

Min. speed 49 dB(A) Sound level Max. speed 62 dB(A) Motor Brushless 500 m3/h

Carbon.Zeo Microtech regenerable filter **Filters**

Lighting

Dynamic Light Strip LED - 2700 K / 5600 K 220-240V 50-60Hz Voltage/Frequency

Net weight 28 kg




| Code | Description |
|-------------------------------|--|
| 8034122362793 | Shelf - Filtering hood body - Wall - 120 cm - Black - 500 m3/h |
| 8034122365091 | Shelf - Filtering hood body - Wall - 120 cm - Customisable front panel - 500 m3/h* |
| 8034122713595 | Shelf - Accessory module 60 cm - Black |
| 8034122713649 | Shelf - Accessory module 60 cm - Customisable front panel* |
| 8034122713601 | Shelf - Accessory module 90 cm - Black |
| 8034122713656 | Shelf - Accessory module 90 cm - Customisable front panel* |
| Accessories | |
| KACL.458#3F | Plant basin Shelf 90 cm |
| KACL.459#3F | Plant basin Shelf 60 cm |
| KACL.1029#HF | Kit end covers |
| KACL.1058 | Carbon.Zeo Microtech regenerable filter |
| *Panel customisable by client | |

Shelf filtering version Hood module 120 cm

Side view with front panel in aluminium

Side view without front panel (customisable version*)




* Measures including lateral end covers (1 mm + 1 mm)




*Min. frontal panel thickness: 3 mm Max. frontal panel thickness: 25 mm


Shelves Module 90 cm KACL.452#NF



Module 60 cm KACL.451#NF




Configuration example 8034122713595 + 8034122362793 + 8034122713601

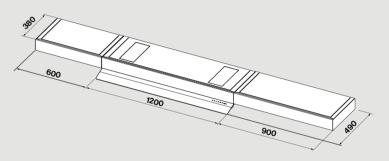


Accessories Plant basin for shelf 90 cm KACL.458#3F





(included in the hood module)



Plant basin's depth 50 mm

Monolith

Functionality multiplied


Resting on the worktop, Monolith is an element of the most precious design, conceived in order to cater for a range of needs in a highly refined way.

A handy channel, equipped with suction function, that can also hold ladles, spices, knives, cutting boards and other tools,

as well as electrical outlets, lends style and practicality to the kitchen. The system is also equipped with suffused light, lending an alluring suspended effect, while diffusing a pleasant beam of light in your kitchen.



More information on Monolith

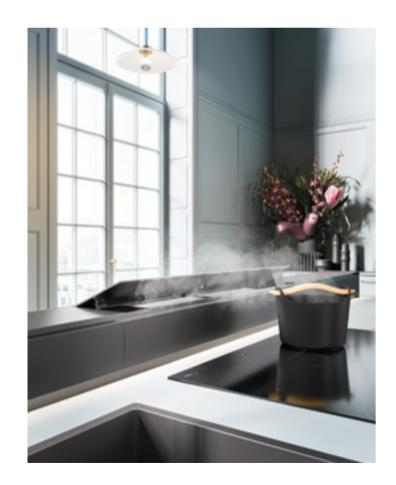



archiproducts AWARDS WINNER










Modularity


Monolith is easy to install in any situation: a single hole in the worktop is sufficient for the suction element, while the other modules are placed and anchored with a snap system. By placing elements of different sizes side by side, it's possible to create a variety of compositions with a uniform appearance, improving both the kitchen's air quality and its aesthetics and functionality.

Shelf

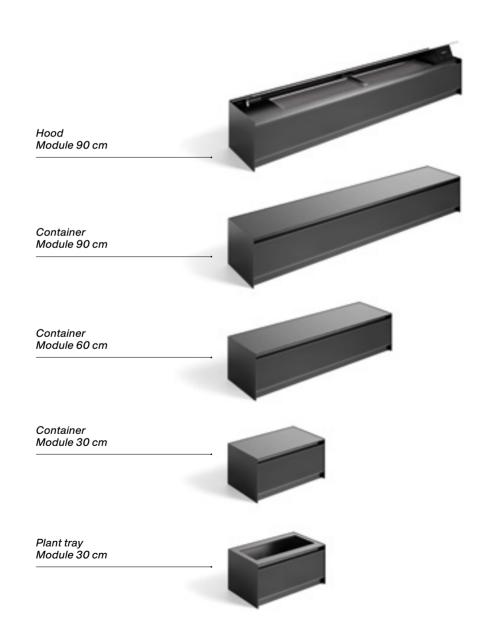



Monolith Brooklyn Index A— Z

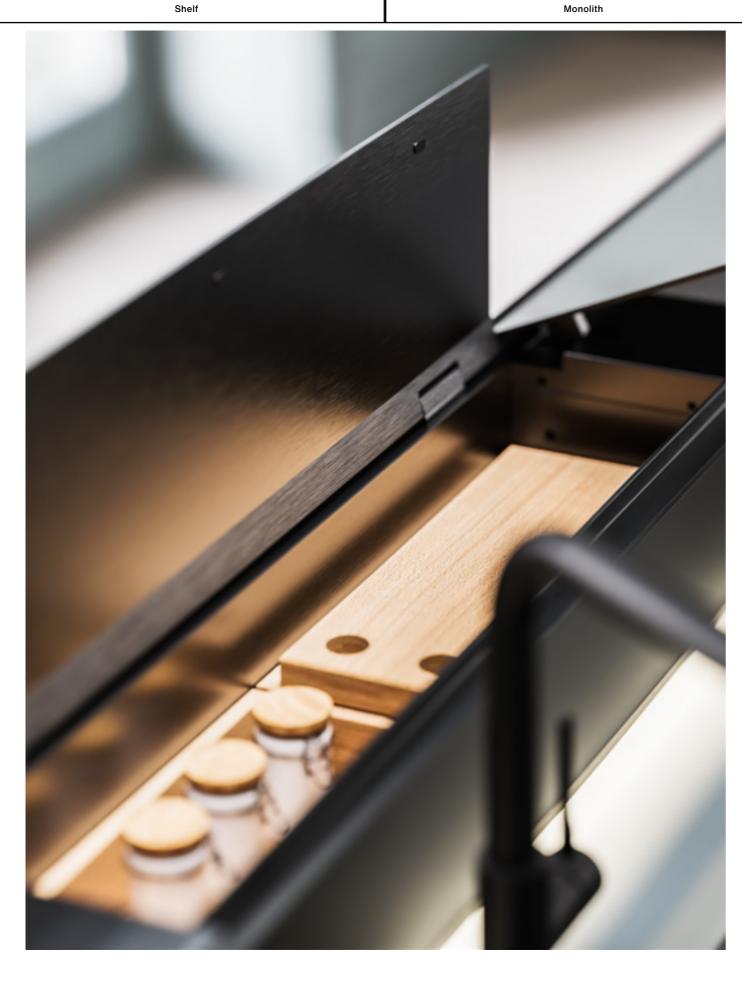

Accessories

Specially created for Monolith, these natural beech wood compartments allow the kitchen to be configured and customised to suit every need, accommodating knives, cutlery, spice racks, a practical chopping board and other items, all easily within reach.

Spice rack L 291 x P 128 x H 54 mm natural beech wood



Cutlery tray (1 compartment) L 291 x P 128 x H 54 mm natural beech wood



Cutlery tray (2 compartments) L 291 x P 128 x H 54 mm natural beech wood



Knife rack L 446 x P 128 x H 54 mm natural beech wood



Cutlery tray (4 compartments) L 446 x P 128 x H 54 mm natural beech wood



Cutting board L 293 x P 128 x H 20 mm natural beech wood



Accessory sockets L 147 x P 128 x H 86 mm



038 Falmec 039 Monolith

Monolith

Island installation

628

550

side view with rear-mounted motor

900

Monolith

Design Studio Ferriani & Falmec Lab

Installation Worktop

Function Extracting/Filtering

Dimensions Hood module 90 cm Accessory module 30 cm/60 cm/90 cm

Satin glass black Materials/Finishes

Anodized aluminium black

Features LED ambient light Modular system

Emptyable liquid collector

Concealed suction with opening panel

Motor position adjustment system to optimise cabinet space

Touch control Control

Remote control (optional)

Dialogue system 🛜

Speed 3 + boost

Motor

Min. speed 59 dB(A) Sound level Max. speed 65 dB(A)

Brushless Motor 800 m3/h

Metallic grease filter, removable and washable **Filters**

Carbon.Zeo Microtech regenerable filter (optional)

Lighting LED Strip (3000K) Voltage/Frequency 220-240V 50-60Hz

Net weight 27 kg A+++ Energy class



| Code | Description |
|---------------|---|
| 8034122364698 | Monolith - Body hood - Worktop - 90 cm - Black - 800 m³/h |
| 8034122713618 | Monolith - Accessory module - 30 cm |
| 8034122713625 | Monolith - Accessory module - 60 cm |
| 8034122713632 | Monolith - Accessory module - 90 cm |
| 8034122713694 | Monolith - Plant basin - 30 cm |
| Accessories | |
| KACL.1010 | Cutting board 293x128 mm in natural beech wood |
| KACL.1011 | Cutlery tray (1 compartment) 293x128x54 mm in natural beech wood |
| KACL.1012 | Cutlery tray (2 compartments) 293x128x54 mm in natural beech wood |
| KACL.1013 | Cutlery tray (4 compartments) 446x128x54 mm in natural beech wood |
| KACL.1014 | Knife rack 446x128x54 mm in natural beech wood |
| KACL.1015#H4F | Accessory sockets (usb + electrical) |
| KACL.1021 | Spices tray |
| KACL.1054 | Carbon.Zeo Microtech regenerable filter |
| KACL.1026 | Silence Kit |
| 105080053 | Remote control |

Monolith Hood module 90 cm



Installation example Wall installation

on top depth 75 cm

578


450

550

750


side view with front-mounted motor

172





Top view with front-mounted motor



Top view with rear-mounted motor (installation with motor in rear position is only possible on the Island version)

Container modules

Cut-out size


Container module 90 cm 8034122713632

Container module 60 cm 8034122713625

min 75 max 100

Container module 30 cm 8034122713618


Plant tray Module 30 cm 8034122713694 Modules configuration example Hood module 90 cm + container module 90 cm 8034122364698 + 8034122713632









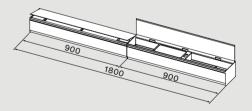

Accessories


Cutlery tray (1 compartment) KACL.1011

Cutlery tray (2 compartment) KACL.1012


Cutlery tray (4 compartment) Accessory sockets KACL.1013 KACL.1015#H4F

Configuration example (accessories stackable on two levels) KACL.1026






Cutting board KACL.1010




Spices tray KACL.1021












Knife rack KACL.1014







Modular architecture

With its bridge structure, Brooklyn makes it possible to increase the space on the island, enriching it with the prestige of black satin aluminium and smoked glass. Technology is hidden within the design: the brushless motor guarantees powerful and silent suction.

The system consists of a hood module and accessory storage modules. Functions can be operated with touch controls, or remotely with radio control or with the exclusive Dialogue System integrated in Falmec hobs.

Monolith



archiproducts AWARDS WINNER





Brooklyn

Design Francesco Lucchese

Installation Worktop

Function Extracting/Filtering **Dimensions** Hood module 90 cm

Accessory module 45 cm/60 cm/90 cm

Materials/Finishes Aluminium satin black Glass smoked

Features Modular system

Concealed suction with opening panel

Motor position adjustment system to optimise cabinet space Grease and odour filter basket with liquid collection tray

Touch control Remote control (optional) Control

Dialogue system 🛜

3 + boost Speed

Sound level

Min. speed 59 dB(A) Max. speed 65 dB(A)

Brushless Motor 800 m3/h Motor

Filters Metallic grease filter, removable and washable

Carbon.Zeo Microtech regenerable filter (optional)

Dynamic Light Lighting

Dimmable lighting

Strip LED - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz

Energy class A+++




| Code | Description |
|---------------|---|
| 8034122369259 | Brooklyn - Body hood - Worktop - 90 cm - Black - 800 m³/h |
| 8034122714592 | Brooklyn - Lateral module - 45 cm |
| 8034122714608 | Brooklyn - Lateral module - 60 cm |
| 8034122714615 | Brooklyn - Lateral module - 90 cm |
| 8034122714622 | Brooklyn - Lateral module with tap cut-out - 60 cm |
| Accessories | |
| KACL.1063#NF | Glass holder for 4 glasses - Black |
| KACL.1062#NF | Kitchen roll holder - Black |
| KACL.1054 | Carbon.Zeo Microtech regenerable filter |
| 105080053 | Remote control |


Brooklyn


Configuration example Side view with motor in front position



Configuration example Side view with motor in rear position







Side modules Right/left module

450/600/900



Right/left module* with sink hole (cut-out Ø35 mm)



Set of 3 hooks for ladles included with the side module




*The side of the module can be freely installed to the right or left

Accessories Rack - 4 wine glasses

Roll holder





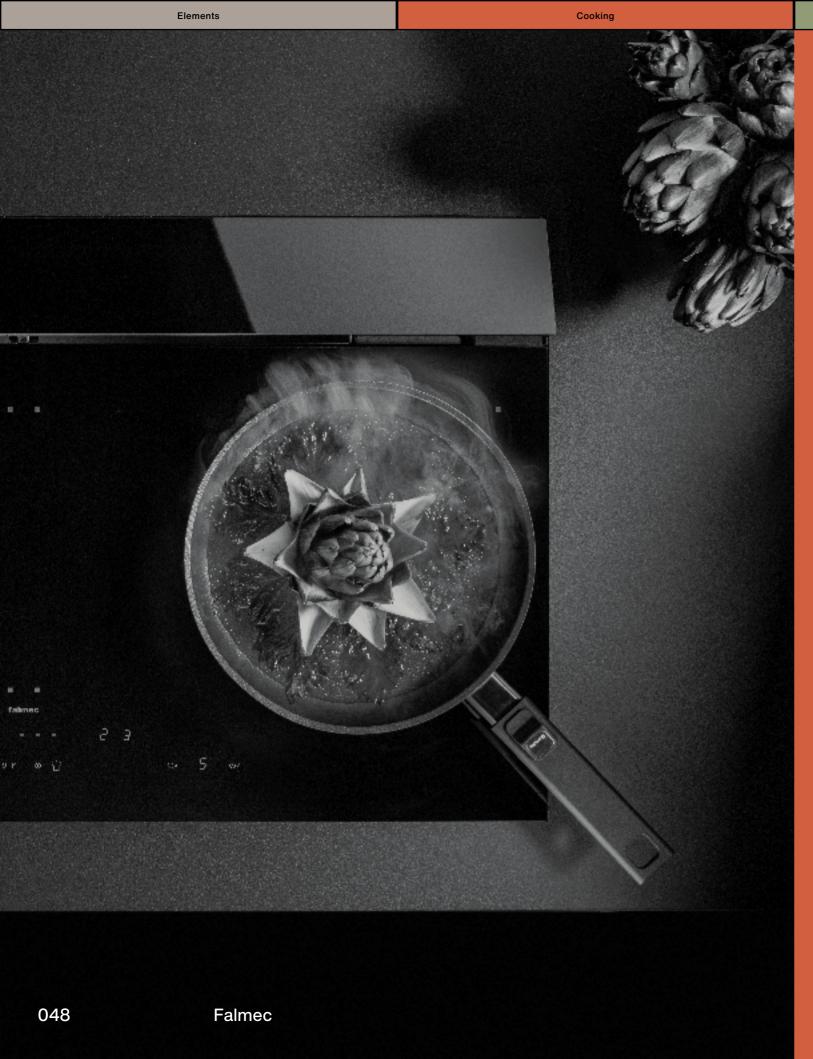

Cooking

Cooking systems

Our cooking systems feature induction hobs with integrated suction functions: fumes are collected, captured and filtered directly at the source. Falmec has a dedicated line that combines excellent cooking technologies with sophisticated

and minimal designs, ensuring perfect integration into your kitchen top. Falmec's cooking range also features a selection of induction hobs with integrated automatic hood control functions, to further simplify kitchen activities.

Zero

Quantum Pro

Brera


Invisible technology

Brera sits on the worktop as a single, essential element, on which the cooking and suction zones, defined by a thin gap, are closely aligned, creating a monochromatic effect. When in operation, the back opens automatically to draw in

cooking fumes, perfectly balanced across the different zones. This configuration guarantees maximum freedom of use and cooking practicality, thanks to a large, even surface with no obstructions.




More information

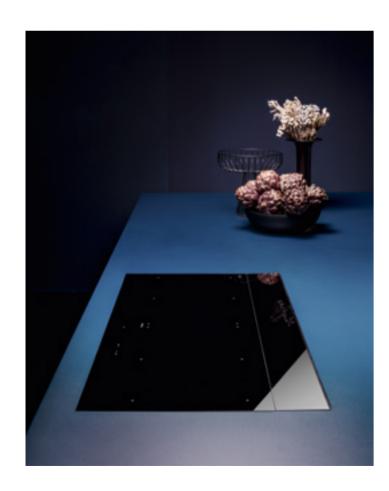

archiproducts AWARDS WINNER



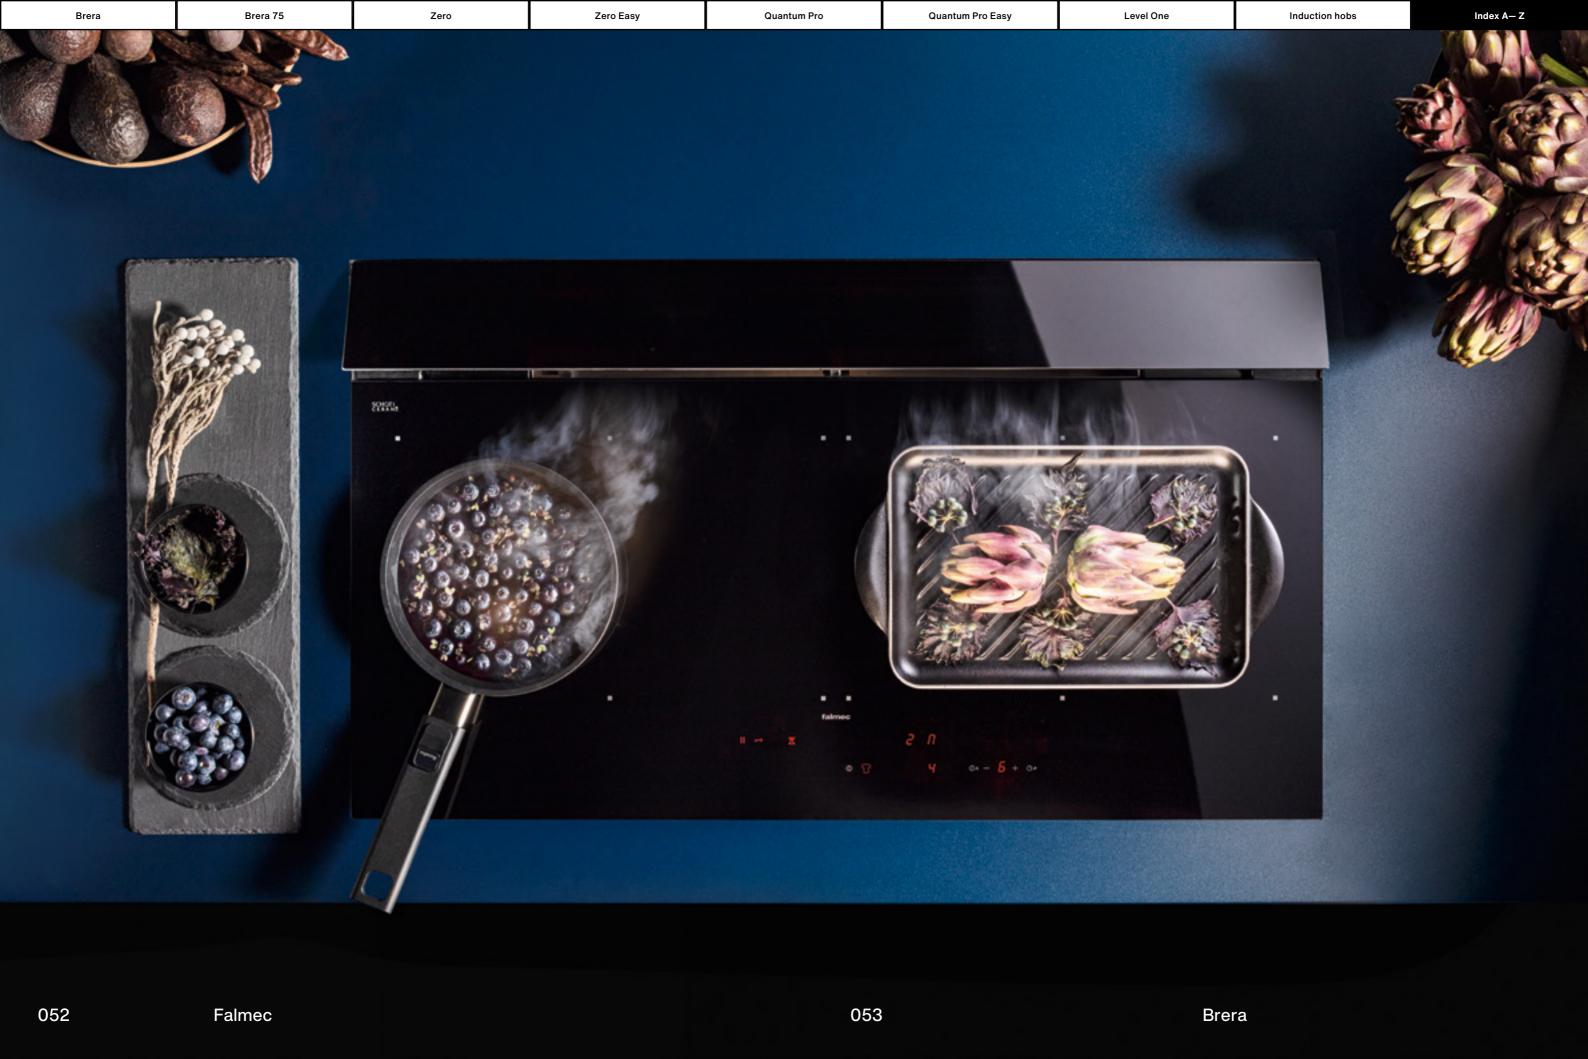

Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A— Z



Refined minimalism with a technological heart



Silent now

The use of a powerful brushless motor (800 m3/h) ensures excellent suction performance, energy efficiency (A+++) and extreme silence, rediscovering the pleasure of living in the kitchen.



Easy cleaning and maintenance

The glass flap opening system conceals the functional part and allows easy cleaning. The antigrease and Carbon.Zeo Microtech filters are located in an accessible removable basket.



The best filtration

The Carbon.Zeo Microtech filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.



Automatic mode

Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation



Invisible technology and essential design

Brera is distinguished by the uniformity of its surface. Thanks to the flush finish between the cooking zone and the suction element with automatic flap opening, aesthetics are elevated to their most essential form.



Obstacle-free cooking

Rear suction works conveniently on a large, continuous, obstacle-free cooking zone. Flex surface technology enables homogeneous cooking even with large pots.



054 Falmec 055 Brera

Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A— Z

Brera

Design Falmec Lab

Control

Sound level

Installation Worktop

Function Extracting/Filtering

Dimensions 89 cm

Materials/Finishes Glass ceramic black glossy/black matt

Features Timer / minute minder

Automode (suction speed automatically adjusts to cooking power)

Motorized flap system

Grease and odour filter basket with liquid collection tray
Motor position adjustment system to optimise cabinet space

Flex Surface technology "Touch slider" control

Min. speed 44 dB(A)

9 cooking levels + boost

Speed 9 + boost

Power Power level management from 2.8kW to 7.4kW

Max. speed 65 dB(A)

Motor Brushless Motor 800 m³/h

Filters Metallic grease filter, removable and washable

Carbon.Zeo Microtech regenerable filter (optional)

Voltage/Frequency 220-240V 50-60Hz

Net weight 30 kg
Energy class A+++

Cooking Functions Residual heat indicators

Recall function Keep warm function (44°)

Automatic pot detection

Automatic cut-off timer (for each cooking zone)

Safety switch-off / safety lock function

Pause function

Double Bridge Function

Chef function


Cooking zones layout

 Cooking zones layout
 4 x 190 x 210 mm

 Power
 2,1 / 3 kW


 Pot
 ≥ Ø110 mm (single)

 ≥ 230 mm (bridge)




| Code | Description |
|---------------|---|
| 8034122900353 | Brera - Worktop - 89 cm - Black glossy/red LED - 800 m3/h |
| 8034122901121 | Brera - Worktop - 89 cm - Black matt/white LED - 800 m3/h |
| Accessories | |
| KACL.1054 | Carbon.Zeo Microtech regenerable filter |
| KACL.1026 | Silence Kit |

Frontal view







Top view




Side view with motor in front position



Side view with motor in rear position




Side view with motor in rear position with Silence Kit KACL.1026




Type of installation

Topmounted


Cut-out size



Flushmounted







056

Brera Brera 75 Zero Quantum Pro Quantum Pro Easy Level One Induction hobs Index A-Z Zero Easy

Brera 75

Design Falmec Lab

Speed

Sound level

Installation Worktop

Function Extracting/Filtering

75 cm **Dimensions**

Glass ceramic black glossy/black matt Materials/Finishes



Motorized flap system Features Timer / minute minder

Automode (suction speed automatically adjusts to cooking power)
Grease and odour filter basket with liquid collection tray Motor position adjustment system to optimise cabinet space

Flex Surface technology

Min. speed 44 dB(A)

"Touch slider" control Control 9 cooking levels + boost

9 + boost

Power

Power level management from 2.8kW to 7.4kW

Max. speed 65 dB(A)

Motor Brushless Motor 800 m3/h

Metallic grease filter, removable and washable **Filters**

Carbon.Zeo Microtech regenerable filter (optional)

220-240V 50-60Hz Voltage/Frequency

30 kg Net weight Energy class A+++

Cooking Functions Residual heat indicators

Recall function Keep warm function (44°)

Automatic pot detection


Automatic cut-off timer (for each cooking zone)

Safety switch-off / safety lock function Pause function

Chef function Bridge function


Cooking zones layout

Cooking zones layout 2 x ø175 mm 2 x 190 x 210 mm Power 1,4 / 2,1 kW 2,1/3kW ≥ ø90 mm ≥ ø110 mm (single) Pot ≥ 230 mm (bridge)




| Code | Description |
|---------------|--|
| 8034122901039 | Brera 75 - Worktop - 75 cm - Black glossy/red LED - 800 m3/h |
| 8034122901114 | Brera 75 - Worktop - 75 cm - Black matt/white LED - 800 m3/h |
| Accessories | |
| KACL.1037 | Carbon.Zeo Microtech regenerable filter |
| KACL.1026 | Silence Kit |


Frontal view




Top view




Side view with motor in front position



Side view with motor in rear position




Side view with motor in rear position with Silence Kit KACL.1026




Type of installation


Topmounted




Flushmounted









058

Falmec

059

Brera 75

Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A — Z



Zero

Versatile integration

Zero is characterised by a clean, minimalist design that allows perfect integration into the kitchen worktop. The central suction part has a glass panel that can be moved to centralise the air flow where it is needed. The hob is equipped with inductors featuring
"Flex surface" technology to accommodate
different sizes and types of pots and pans.
Its perfectly smooth design and access
from above to the functional area ensures
easy cleaning and maintenance.



More information on Zero

O61 Zero



Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A— Z



Clean aesthetics, functionality and absolute precision



Flat design

With its elegant interplay of geometrics, Zero is characterised by the rigour of its design, which is clean and unobtrusive and allows perfect integration into the kitchen worktop.



Cleaning convenience

The sliding suction element also serves as a handle for maintenance and cleaning of the grill, the odour filter and the tray for collecting liquids.



Air Slide System

The suction is oriented according to the need thanks to a sliding element that allows the suction power to be focused towards the position of the pan. Suction is precise and consumption is reduced.



The best filtration

The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.




Simplified installation and maintenance

Zero Easy is the "plug-and-play' version with a rear outlet that is easy to install as it requires no ducting. This configuration enables full use of the cabinet. The odour filter integrated in the suction body is removable from above for easy maintenance.



Automatic mode

Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.

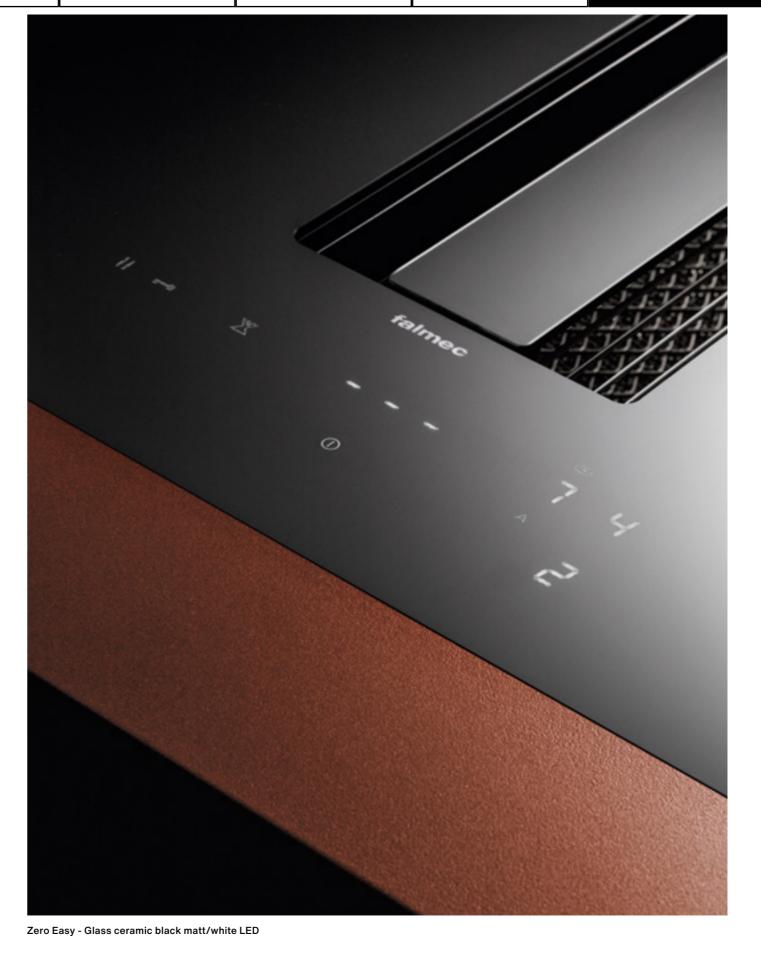

064 Falmec 2ero

Index A-Z Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs falmec 066 067 Zero Falmec

Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A— Z

Zero 76 cm

197

Zero

Design Falmec Lab

Control

Speed

Motor

InstallationWorktopFunctionExtracting/FilteringDimensions76 cm/84 cm

Materials/Finishes Glass ceramic black glossy

Features Timer / minute minder

Automode (suction speed automatically adjusts to cooking power)

Air Slide System to direct the suction Emptyable liquid collector

Flex Surface technology
"Touch slider" control

9 cooking levels + boost

9 + boost

Power Power level management from 2.8kW to 7.4kW

Sound level Min. speed 57 dB(A)
Max. speed 69 dB(A)

Brushless Motor 600 m³/h

Filters Metallic grease filter, removable and washable

Combined regenerable Carbon.Zeo filter (optional)

Voltage/Frequency 220-240V 50-60Hz

Net weight 23/28 kg
Energy class A+

Cooking Functions Residual heat indicators

Recall function Keep warm function (44°)

Automatic pot detection

Automatic cut-off timer (for each cooking zone)

Safety switch-off / safety lock function

Pause function Bridge function



Cooking zones layout

 Dimension
 2 x 210 x 190 mm


 Power
 2,1 / 3 kW

 Pot
 ≥ Ø110 mm (single))

 \geq Ø110 mm (single)) \geq Ø90 mm \geq 230 mm (bridge)






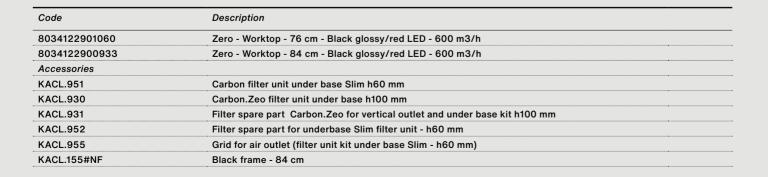

1 x ø175 mm

1.4 / 2.1 kW

Frontal view Top view Side view min 600 min 500 / 515 min 450 220 760 159 Zero 84 cm Frontal view Top view Side view min 600 520 min 450 220

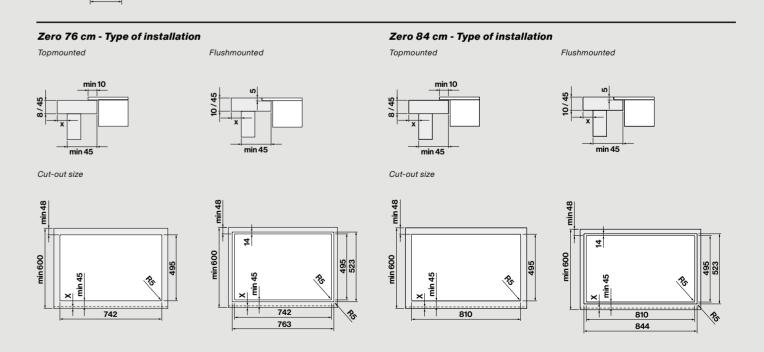

Zero

1 x ø215 mm

2.3 / 3 kW

≥ ø110 mm

Brera Brera 75 Zero Quantum Pro Quantum Pro Easy Level One Induction hobs Index A-Z Zero Easy

Zero Easy 76 cm

Zero Easy 84 cm

Frontal view

Frontal view

Zero Easy

Design Falmec Lab

Control

Installation Worktop Filtering Function Dimensions 76 cm/84 cm

Glass ceramic black glossy/black matt Materials/Finishes



Features Timer / minute minder

Automode (suction speed automatically adjusts to cooking power) Air Slide System to direct the suction

Emptyable liquid collector

Flex Surface technology "Touch slider" control

9 cooking levels + boost

9 + boost Speed

Power Power level management from 2.8kW to 7.4kW

Min. speed 47 dB(A) Sound level Max. speed 65 dB(A)

Brushless Motor 600 m3/h Motor

Metallic grease filter, removable and washable **Filters**

Carbon.Zeo Microtech regenerable filter

220-240V 50-60Hz Voltage/Frequency

23/28 kg Net weight A+ Energy class

Cooking Functions Residual heat indicators Recall function

Keep warm function (44°)

Black frame - 84 cm

Automatic pot detection

Automatic cut-off timer (for each cooking zone)

Safety switch-off / safety lock function

Pause function Bridge function



Cooking zones layout

KACL.155#NF

Dimension 2 x 210 x 190 mm 1 x ø175 mm Power 2.1 / 3 kW ≥ ø110 mm (single)) Pot ≥ 230 mm (bridge)

1.4 / 2.1 kW ≥ ø90 mm



1 x ø215 mm

2.3 / 3 kW

≥ ø110 mm






Top view

Top view

760

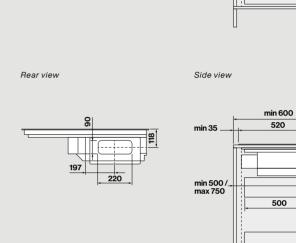


Side view


min 500 / max 750


min 600

500

Zero Easy 76 cm - Type of installation Zero Easy 84 cm - Type of installation

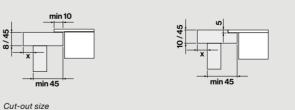








Cut-out size

Rear view








Code Description 8034122901077 Zero Easy - Worktop - 76 cm - Black glossy/red LED - 600 m3/h 8034122901138 Zero Easy - Worktop - 76 cm - Black matt/white LED - 600 m3/h 8034122900940 Zero Easy - Worktop - 84 cm - Black glossy/red LED - 600 m3/h Zero Easy - Worktop - 84 cm - Black matt/white LED - 600 m3/h 8034122901145 Accessories KACL.1043 Regenerable Carbon.Zeo Microtech filter (spare part) KACL.1036 Anti-noise conveyer

070 Falmec Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs

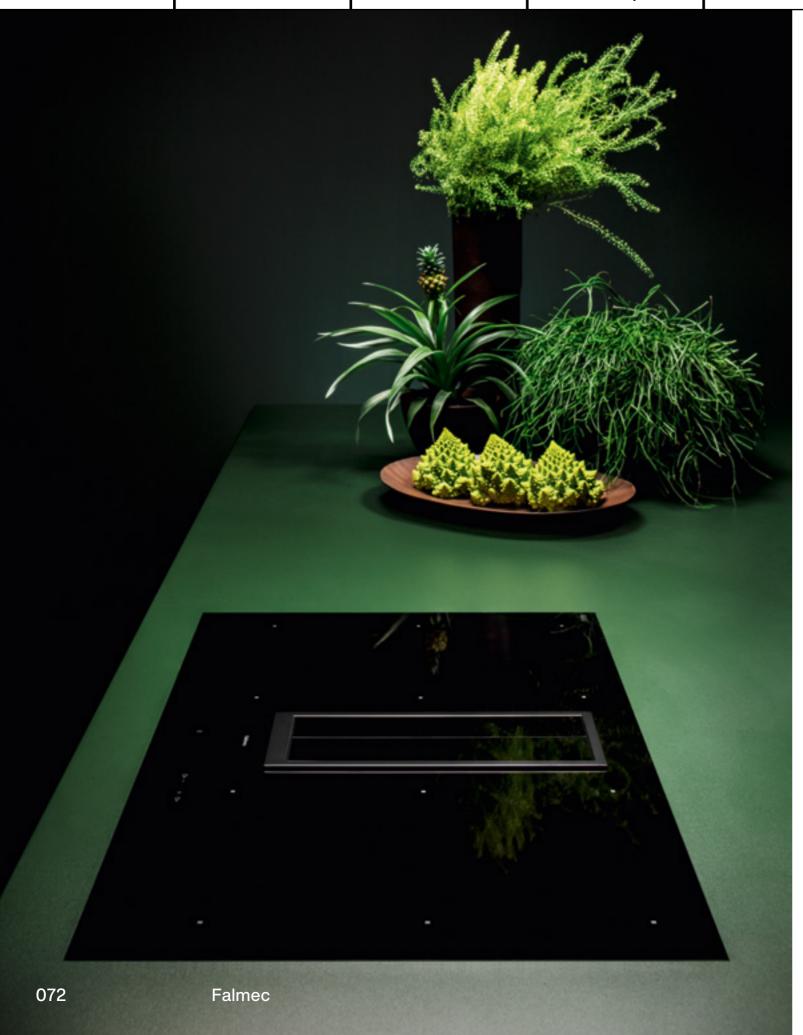

Quantum Pro

Advanced performance

Quantum Pro has a minimalist design, enhanced by a central element with opening glass flaps that gives it a professional yet elegant appeal. Every construction and technological detail is designed to combine excellent performance in terms of suction and

low noise levels. Quantum Pro is also available in an Easy version that offers maximum ease of installation and maintenance, thanks to the Carbon.Zeo filter integrated in the hood body and the direct outlet at the rear.



More information on Quantum Pro



073 Quantum Pro



074 Falmec 075 Quantum Pro

Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A— Z



Design uniformity, performance versatility



Flap System

The suction area is opened by two glass flaps that give uniformity of colour throughout the cooking area when closed. The scratch-resistant black steel frame that defines the suction zone is designed to prevent accidental liquid spillage during cooking.



Cleaning convenience

The glass flap opening system conceals the functional part and allows easy cleaning.



Flex surface

The Flex surface technology of Quantum Pro includes a double bridge function that allows extremely versatile use even with large pans.



Simplified installation

Quantum Pro Easy is the plug-and-play version with a rear outlet simple to install as it requires no ducting. This configuration makes full use of the cabinet depth.



3 years.

The best filtration

The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can

be regenerated to guarantee its effectiveness for a minimum of



Automatic mode

Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.



076 Falmec 077 Quantum Pro

Brera Brera 75 Zero Quantum Pro Quantum Pro Easy Level One Induction hobs Index A— Z Zero Easy

Quantum Pro

Design Falmec Lab

Installation Worktop

Extracting/Filtering Function

84 cm **Dimensions**

Glass ceramic black glossy Materials/Finishes

Automode (suction speed automatically adjusts to cooking power) Features Motorized flap system

Emptyable liquid collector Anti-liquid spillage central frame Flex Surface technology "Touch slider" control

Control 9 cooking levels + boost

9 + boost Speed

Power Power level management from 2.8kW to 7.4kW

Min. speed 46 dB(A) Max. speed 64 dB(A)

Motor Brushless Motor 600 m3/h

Metallic grease filter, removable and washable **Filters**

Carbon.Zeo regenerable filter (optional)

Voltage/Frequency 220-240V 50-60Hz

Net weight 27 kg A+ Energy class


Cooking Functions Timer for each cooking zone Recall function

Keep warm function (44°)


Automatic pot detection Safety switch-off / safety lock function

Pause function


Double Bridge Function

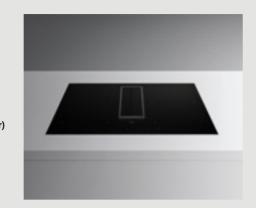

Frontal view




Top view




min 600

Side view




Cooking zones layout


Dimension 4 x 210 x 190 mm Power 2.1 / 3 kW ≥ ø110 mm (single) Pot ≥ 230 mm (bridge)






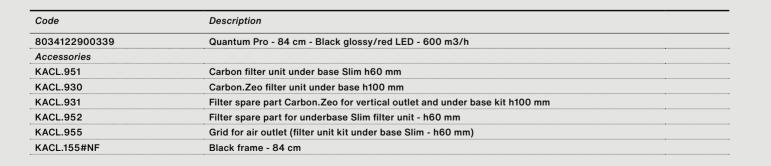


Type of installation








Flushmounted





Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A— Z

Quantum Pro Easy

Design Falmec Lab

Control

Installation Worktop Filtering **Function** 84 cm **Dimensions**

Glass ceramic black glossy Materials/Finishes



Automode (suction speed automatically adjusts to cooking power) Features

Motorized flap system Emptyable liquid collector Anti-liquid spillage central frame Flex Surface technology "Touch slider" control

9 cooking levels + boost

9 + boost Speed

Power Power level management from 2.8kW to 7.4kW

Min. speed 46 dB(A) Max. speed 64 dB(A)

Brushless Motor 600 m³/h Motor

Metallic grease filter, removable and washable **Filters**

Carbon.Zeo regenerable filter

220-240V 50-60Hz Voltage/Frequency

Net weight 26 kg A+ Energy class

Cooking Functions Timer for each cooking zone

Recall function Keep warm function (44°)

Automatic pot detection

Safety switch-off / safety lock function Pause function


Double Bridge Function

4 x 210 x 190 mm

2,1/3 kW




Frontal view





Top view



Rear view









Type of installation


Topmounted




Flushmounted













Power

Dimension

Cooking zones layout

| rui | اااااا الاستان الاستادي الاستان الاستادي الاستان الاستادي الاستان الاستادي الاستان ال | | |
|-----|---|------------------|--|
| | | ≥ 230 mm (bridge | |
| | | | |
| | | | |
| | | | |

| Code | Description |
|---------------|--|
| 8034122900346 | Quantum Pro Easy - 84 cm - Black glossy/red LED - 600 m3/h |
| Accessories | |
| KACL.963 | Carbon.Zeo filter (spare part) |
| KACL.155#NF | Black frame - 84 cm |

080

Falmec

081

Quantum Pro Easy

Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A— Z



Level One

Raised performance

Level One integrates focused suction and a versatile induction hob, presenting itself as an essential object, characterised by the elegant combination of black satin aluminium, smoked glass and black glass. It features touch controls and an integrated the most of the space inside the cabinet. LED strip with dynamic light. Thanks to a motorised system, the downdraft hood

lifts up to approach to the source of steam, depending on the height of the pans, optimising suction from the powerful and silent brushless motor. The latter can also be positioned at the rear to make





083 Level One

Falmec

Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A — Z



Integrated functions and optimised suction performance



Up/down system

The suction zone adjusts in height by moving closer to the steam source, thus adapting to the type of pan used during cooking.



Flex surface

The Flex surface technology of Level One includes a double bridge function that allows extremely versatile use even with large pans.



Obstacle-free cooking

Rear suction works conveniently on a large, continuous, obstacle-free cooking zone.



Silent pow

The use of a powerful brushless motor (800 m3/h) ensures excellent suction performance and extreme silence, rediscovering the pleasure of living in the kitchen.




The best filtration

The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.



Automatic mode

Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.

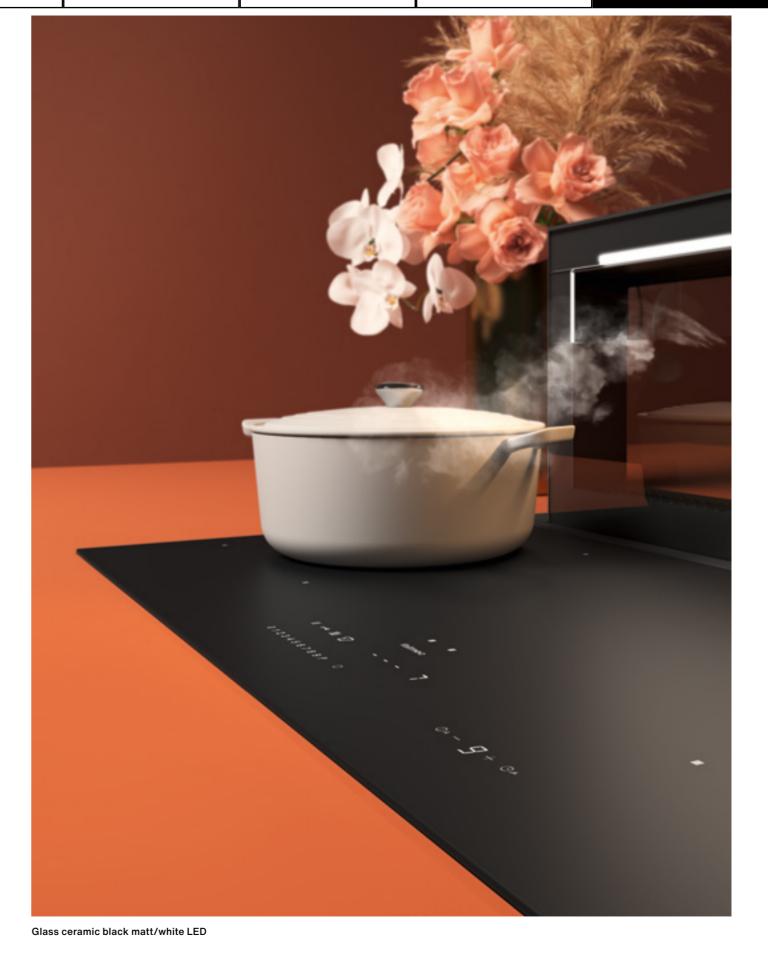

084 Falmec 085 Level One

Brera Brera 75 Zero Quantum Pro Quantum Pro Easy Level One Induction hobs Index A-Z Zero Easy

Level One

Design Falmec Lab

Installation Worktop

Function Extracting/Filtering

Dimensions 90 cm

Glass ceramic black glossy/black matt Aluminium satin black Materials/Finishes

Glass smoked finishing

Features Up/Down lift system with height adjustment

Automode (suction speed automatically adjusts to cooking power) Grease and odour filter basket with liquid collection tray

Motor position adjustment system to optimise cabinet space Flex Surface technology

"Touch slider" control Control 9 cooking levels + boost

9 + boost Speed

Power level management from 2.8kW to 7.4kW Power

Min. speed 44 dB(A) Sound level Max. speed 64 dB(A)

Brushless Motor 800 m3/h Motor

Filters Metallic grease filter, removable and washable

Carbon.Zeo Microtech regenerable filter (optional)

Dynamic Light Lighting

LED stripe 7 W - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz

Net weight 44 kg Energy class A++

Residual heat indicators Recall function **Cooking Functions**

Keep warm function (44°) Automatic pot detection

Automatic cut-off timer (for each cooking zone)

Safety switch-off / safety lock function

Pause function

Double Bridge Function

Chef function


Cooking zones layout

4 x 190 x 210 mm **Dimension** 2,1 / 3 kW Power ≥ ø110 mm (single) Pot ≥ 230 mm (bridge)




| Code | Description |
|---------------|---|
| 8034122367675 | Level One - Worktop - 90 cm - Black glossy/white LED - 800 m3/h |
| 8034122370101 | Level One - Worktop - 90 cm - Black matt/white LED - 800 m3/h |
| Accessories | |
| KACL.1042 | Carbon.Zeo Microtech regenerable filter |


Frontal view




Side view with motor in front position

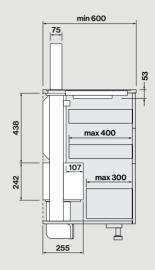


Side view with motor in rear position

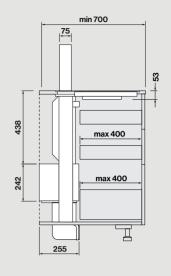





Type of installation


Topmounted



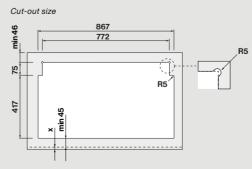

Flushmounted



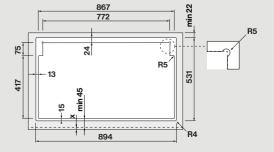

086 Falmec 087

Level One





Induction hobs

The best match

hobs, specifically created to integrate with the design and functionality of its hoods. Maximum precision in temperature management, rapidity in reaching the perfect cooking point, dimensions suitable

Falmec offers a new collection of induction for all space and movement requirements: with Falmec induction hobs it is easy to achieve extraordinary results in the kitchen.

088 Falmec 089 Induction hobs



Index A-Z

Brera 75

Zero

Zero Easy

Quantum Pro


Quantum Pro Easy

Level One


Induction hobs

Brera

090 Falmec 091 Induction hobs

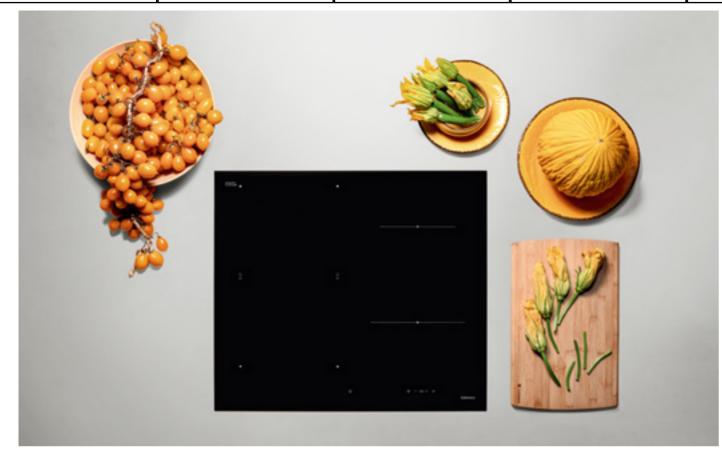

Induction hob 58 cm

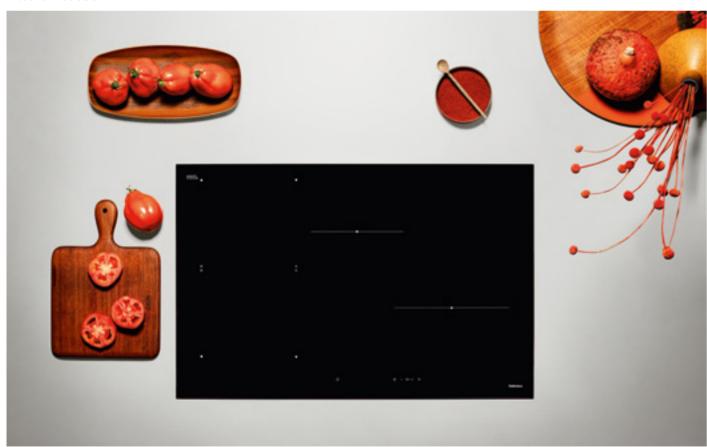

Induction hob 78 cm



Panoramic induction hob 88 cm



Induction hob 90 cm

092 Falmec 093 Induction hobs

Brera Brera 75 Zero Zero Easy Quantum Pro Quantum Pro Easy Level One Induction hobs Index A—Z



Dialogue System

Connectivity between hood and hob

Through the Dialogue System it is now possible to control the different functions of the hood directly from the hob, where a touch control has been integrated. The dialogue between hob and cooker hood takes place via radio frequency and does not require any other receiving devices to be installed in the hood.

The Dialogue System is compatible with all Falmec hoods that are designed to be radio-controlled. In automatic operation the Dialogue System independently adjusts the suction power according to actual need, guaranteeing extreme ease of use and the best ratio between consumption and performance.



095 Induction hobs

Brera 75 Quantum Pro Easy Level One Index A-Z Brera Zero Zero Easy Quantum Pro Induction hobs

Induction hob 58 cm

Design Falmec Lab

Power

Installation Worktop Dimensions 58 cm

Materials/Finishes Glass ceramic black glossy



Flex Surface technology Features 9 cooking levels + boost Control

Touch control with LED display Dialogue system 🛜

Power level management from 2.8kW to 7.4kW Voltage/Frequency 220-240V 50-60Hz

Net weight

Cooking Functions 4 cooking zones with automatic pots recognition

Residual heat indicators Timer for each cooking zone Recall function Keep warm function (44°) Pause function Chef function

Bridge function




Cooking zones layout


Dimension 2,1 / 3 kW Power Pot ≥ ø110 mm (single) ≥ 230 mm (bridge)


2 x 210 x 190 mm 1 x ø175 mm 1,4 / 2,1 kW

1 x ø215 mm 2,3 / 3 kW ≥ ø90 mm ≥ ø110 mm




Frontal view Side view









Cut-out size







Flushmounted

Top view







| Code | Description |
|---------------|--|
| 8034122900896 | Induction hob 58 cm - Black glossy/red LED - 4 cooking zones |

Induction hob 78 cm

Design Falmec Lab

Installation Worktop 78 cm Dimensions

Materials/Finishes Glass ceramic black glossy



Features Flex Surface technology Control 9 cooking levels + boost

Touch control with LED display
Dialogue system

Power level management from 2.8kW to 7.4kW Power Voltage/Frequency 220-240V 50-60Hz

Net weight

Cooking Functions 4 cooking zones with automatic pots recognition


Residual heat indicators Timer for each cooking zone Recall function Keep warm function (44°) Pause function Chef function **Bridge function**




Cooking zones layout


Dimension 2 x 210 x 190 mm 1 x ø215 mm 1 x ø265 mm 2,1 / 3 kW 2,3 / 3 kW 2,3 / 3 kW Power Pot ≥ ø110 mm (single) ≥ ø110 mm ≥ ø130 mm ≥ 230 mm (bridge)

Frontal view






| | | <u>8</u> 4 | 1 | | |
|-----|-----|------------------|----|-----|----|
| 400 | 275 |] ' | | 290 | 89 |
| 739 | | | | 474 | |
| | | -1 | 1. | | -1 |



Cut-out size


Type of installation




Flushmounted

Top view







| Code | Description |
|---------------|--|
| 8034122900902 | Induction hob 78 cm - Black glossy/red LED - 4 cooking zones |

096 **Falmec** Induction hob 58 cm 097

Brera 75 Quantum Pro Easy Level One Index A-Z Brera Zero Zero Easy Quantum Pro Induction hobs

Panoramic induction hob 88 cm

Design Falmec Lab

Power

Cooking Functions

Installation Worktop 88 cm Dimensions

Materials/Finishes Glass ceramic black glossy



Flex Surface technology Features 9 cooking levels + boost Control

Touch control with LED display Dialogue system 🛜

Power level management from 2.8kW to 7.4kW Voltage/Frequency 220-240V 50-60Hz

Net weight

Residual heat indicators Timer for each cooking zone Keep warm function (44°) Pause function Chef function Bridge function Automatic pot detection


Recall function





Cooking zones layout

Dimension 4 x 190 x 210 mm 2,1 / 3 kW Power


Pot ≥ ø110 mm (single) ≥ 230 mm (bridge)








Type of installation






Top view Cut-out size







| Code | Description |
|---------------|--|
| 8034122900919 | Panoramic Induction hob 88 cm - Black glossy/red LED - 4 cooking zones |

Induction hob 90 cm

Design Falmec Lab

Voltage/Frequency

Installation Worktop 90 cm Dimensions

Materials/Finishes Glass ceramic black glossy



Flex Surface technology Features 9 cooking levels + boost Control

Touch control with LED display

Dialogue system 🛜

220-240V 50-60Hz

Power level management from 2.8kW to 10.4kW Power

Net weight

Cooking Functions Residual heat indicators

Timer for each cooking zone Recall function

Keep warm function (44°) Automatic pot detection


Pause function Chef function **Bridge function**




Cooking zones layout


Dimension 2 x 210 x 190 mm 1 x ø265 mm 2 x ø175 mm 2,1 / 3 kW 2,3 / 3 kW 1,4 / 2,1 kW Power Pot ≥ ø110 mm (single) ≥ ø130 mm ≥ ø90 mm


≥ 230 mm (bridge)















Flushmounted

Top view





Cut-out size



| Code | Description |
|---------------|--|
| 8034122900926 | Induction hob 90 cm - Black glossy/red LED - 5 cooking zones |

098 **Falmec** Induction hob 88 cm 099 Induction hob 90 cm



Air

In search of the perfect hood

Falmec has always dedicated itself to suction able to offer a wide range of models with hoods by way of continuous research, in order to improve design and performance, without ever compromising practicality of use and ease of installation. Thus, we are

an unmistakable, contemporary look, featuring technological solutions that meet your every need, while improving the air you breathe in the kitchen.

101 Air Worktop Built-in Ceiling Island Wall/Island Wall Index A— Z



Worktop

Solutions that integrate perfectly into the worktop, with a design that places functionality, ergonomics and efficiency at the forefront, ensuring optimal performance. Perfect for spaces with a minimal look, in tune with contemporary tastes and lifestyles, and featuring technology that is concealed within the design of your kitchen.

103 Worktop



Level Invisible

Hidden technology Level Invisible literally disappears from view, as its top panel can be made of the same material as the kitchen top. A solution that is both minimalist and flexible, as it is suitable for gas and induction cooking systems, although it is also a perfect match for integrated hob

solutions. The hood is raised with a touch, then a simple gesture is all it takes to control suction on the frontal touch panel. Powerful and silent, the brushless motor can be positioned at the rear to optimise the use of cabinet space.





Level Invisible

Design Falmec Lab

Function

Installation Worktop

Extracting/Filtering **Dimensions** 90 cm

Glass smoked finishing Aluminium satin black Materials/Finishes

Top panel customizable



Features Up/Down lift system with height adjustment

Automatic cut-off timer

Grease and odour filter basket with liquid collection tray

Motor position adjustment system to optimise cabinet space

Touch control Remote control (optional) Control

Dialogue system 🕏

3 + boost Speed

Min. speed 44 dB(A) Max. speed 64 dB(A) Sound level

Brushless Motor 800 m³/h Motor

Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional) Filters

Lighting

Dynamic Light LED stripe 7 W - 2700 K / 5600 K

220-240V 50-60Hz Voltage/Frequency


Net weight 32 kg A++ Energy class



Level

| Code | Description |
|---------------|--|
| 8034122367668 | Level Invisible - Worktop - 90 cm - Customisable top panel* - 800 m3/h |
| Accessories | |
| KACL.1042 | Carbon.Zeo Microtech regenerable filter |
| 105080053 | Remote control |

*Panel customisable by client

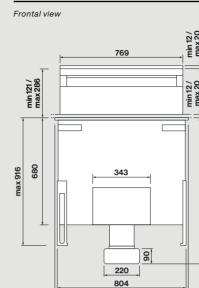






Top view

Side view with motor in front position


837

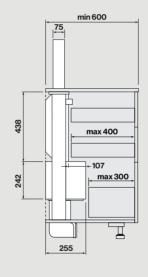







Cut-out size



Top view - customised top panel







Level



109

Level

Level

Design Falmec Lab

Motor

Installation Worktop

Extracting/Filtering **Function**

Dimensions 90 cm

Glass smoked finishing Materials/Finishes

Aluminium satin black



Features

Up/Down lift system with height adjustment Grease and odour filter basket with liquid collection tray Motor position adjustment system to optimise cabinet space

Touch control Control

Remote control (optional)
Dialogue system

Speed 3 + boost

Min. speed 44 dB(A) Max. speed 64 dB(A) Sound level

Brushless Motor 800 m³/h

Metallic grease filter, removable and washable **Filters**


Carbon.Zeo Microtech regenerable filter (optional)

Dynamic Light Lighting

LED stripe 7 W - 2700 K / 5600 K


220-240V 50-60Hz Voltage/Frequency


32 kg Net weight Energy class A++

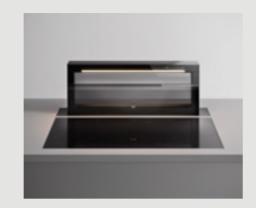

Level


| Code | Description |
|---------------|--|
| 8034122367651 | Level - Worktop - 90 cm - Black - 800 m3/h |
| Accessories | |
| KACL.1042 | Carbon.Zeo Microtech regenerable filter |
| 105080053 | Remote control |

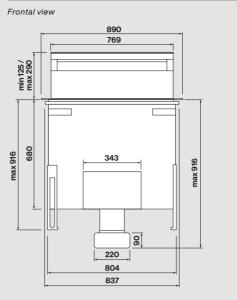





Side view with motor in rear position


Side view with motor in front position



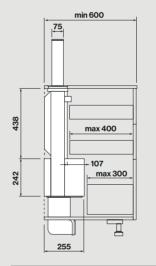




Topmounted




Flushmounted




255

Cut-out size







110

Falmec

111

Level



Down Draft

Technology in motion

A motorised system allows for the hood to be extracted from behind the worktop, capturing fumes and vapour as they are released from the top of the kitchenware. This solution also guarantees correct lighting of the cooking area, high suction performance and, thanks to various options

regarding motors and installation types, optimal use of space inside the counter. The hood can also be controlled directly from the Falmec induction hob using Dialogue System technology with its automatic function, thus optimising ease of interaction.



113

Down Draft

Down Draft

Design Falmec Lab

Installation Worktop

Function Extracting/Filtering
Dimensions 90 cm/120 cm

Materials/Finishes
Stainless steel (AISI 304) scotch brite
Glass black



Features Perimeter suction

AISI 304 stainless steel frame

5° frontal inclination for greater suction efficiency

Control Remote control (optional)

Dialogue system ®

Speed 3 + boost

Sound level Min. speed 51 dB(A)
Max. speed 64 dB(A)

Motor sold separately

Filters Top filter, removable and washable

Carbon.Zeo regenerable filter (optional)

Lighting Strip LED (4000K)


 Voltage/Frequency
 220-240V 50-60Hz

 Net weight
 37/43 kg

Energy class B/C

Data with motor 950 m3/h

For correct operation of this type of hoods, we recommend the use of inline hobs.

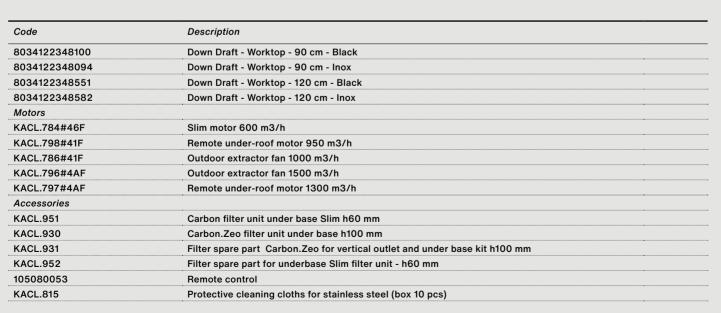






Level


Configuration examples

Ducted version (onboard 950 m3/h motor) Side view, motor on the front Side view, motor on the back











Filtering version (Slim motor) with Carbon.Zeo underbase filter (KACL.930) Side view, Slim motor on the front

Side view, Slim motor on the back Side view, Slim motor on the back, Under base slim filter KACL.951 (h60)










Cut-out size 90 cm: 98 mm x 810 mm 120 cm: 98 mm x 1110 mm Base board grid, included in the filter kit KACL.930

448

Cut-out size

385

Base board grid, for use with filter KACL.951 h60 (optional)



114 Falmec

115

Down Draft





Built-in

Our built-in hoods integrate directly into kitchen cabinets positioned above the hob, offering excellent performance when it comes to fume and vapour extraction. We recommended them for spaces that have a minimal look, such as kitchens with a linear design and repeated suspended cabinets. These solutions allow for the maximum optimisation of available space, while at the same time guaranteeing extremely high-performance solutions thanks to Falmec's various innovations.

117 Built-in


Parallel


Virgola Touch

Invisible functionality

New Virgola "Touch" has a functional, elegant design that is suited to linear furnishing designs in which the hood is mounted inside the cabinet, to ensure functionality and maximum optimisation of the internal space. Available in different sizes, this hood is equipped with a motor

and a touch control panel that is integrated into a window that allows you to access various functions without opening the door, while also protecting the cabinet. A tone-adjustable light is integrated into the lower panel, providing the hob with excellent lighting.

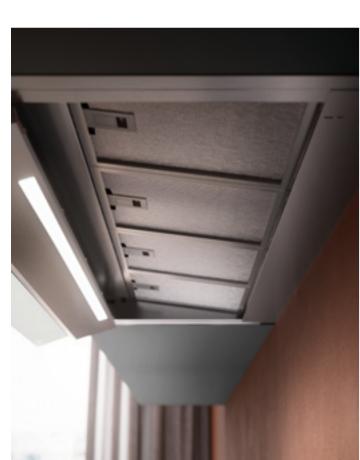

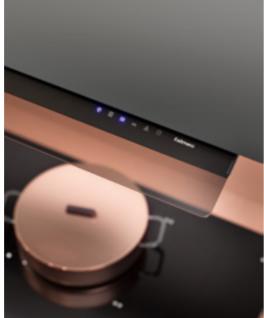



Virgola Touch Virgola No-Drop Touch Virgola Touch NRS Virgola Move Parallel Gruppo Incasso Pro Gruppo Incasso NRS Gruppo Incasso Murano Gruppo Incasso No-Drop Built-in Index A—Z

Virgola Touch

Design Falmec Lab

Installation Built-in

Function Extracting/Filtering

Dimensions 60 cm/75 cm/90 cm/120 cm

Materials/Finishes Stainless steel scotch brite

Materials/Finishes Stainless steel scotch bri

Painted stee



Features Rotatable tempered glass flap with integrated control

Protective flaps for the edge of the wall unit

Control Touch control
Speed 3 + boost

Sound level Min. speed 51 dB(A)

Max. speed 67 dB(A)

Motor 800 m³

Filters Metallic grease filter, removable and washable

Carbon.Zeo Microtech regenerable filter (optional)

Lighting Dynamic Light
Dimmable light

Dimmable lighting 60 cm: Strip LED 3,5 W - 2700 K / 5600 K 75 cm: Strip LED 4,6 W - 2700 K / 5600 K 90/120 cm: Strip LED 5,8 W - 2700 K / 5600 K


Voltage/Frequency 220-240V 50-60Hz


Worktop minimum distance Induction 52 cm / Gas 52 cm


Net weight 10/12/14/17 kg

Energy class









| Code | Description |
|---------------|--|
| 8034122367446 | Virgola Touch - Built-in - 60 cm - Black - 800 m3/h |
| 8034122367439 | Virgola Touch - Built-in - 60 cm - Inox - 800 m3/h |
| 8034122367460 | Virgola Touch - Built-in - 75 cm - Black - 800 m3/h |
| 8034122367453 | Virgola Touch - Built-in - 75 cm - Inox - 800 m3/h |
| 8034122367484 | Virgola Touch - Built-in - 90 cm - Black - 800 m3/h |
| 8034122367477 | Virgola Touch - Built-in - 90 cm - Inox - 800 m3/h |
| 8034122367422 | Virgola Touch - Built-in - 120 cm - Black - 800 m3/h |
| 8034122367415 | Virgola Touch - Built-in - 120 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KCVJN.01#3 | Chimney h 120 mm - Inox |
| KCVJN.00#3 | Telescopic chimney h 185 + h 185 mm - Inox |
| KCVJN.01#N | Chimney h 120 mm - Black |
| KCVJN.00#N | Telescopic chimney h 185 + h 185 mm - Black |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| KACL.106 | Glass shelf 60 cm |
| KACL.107 | Glass shelf 90 cm |
| KACL.108 | Glass shelf 120 cm |

Virgola No-Drop Touch

Design Falmec Lab



Installation Built-in

Function Extracting/Filtering

Dimensions 60 cm/75 cm/90 cm/120 cm

Materials/Finishes Stainless steel scotch brite

Painted steel black

Features Emptyable liquid collector

Rotatable tempered glass flap with integrated control Protective flaps for the edge of the wall unit

No-Drop System anti-condensation technology

Control Touch control
Speed 3 + boost

Sound level Min. speed 51 dB(A) Max. speed 67 dB(A)

Motor 800 m³/

Filters Anti-condensation no-drop filter in technopolymer

Description

Glass shelf 60 cm

Glass shelf 90 cm

Glass shelf 120 cm

Carbon.Zeo Microtech regenerable filter (optional)

Lighting Dynamic Light
Dimmable lighting

60 cm: Strip LED 3,5 W - 2700 K / 5600 K

75 cm: Strip LED 4,6 W - 2700 K / 5600 K 90/120 cm: Strip LED 5,8 W - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz

Worktop minimum distance Induction 52 cm / Gas 52 cm

Net weight 10/12/14/17 kg


Energy class


Code


KACL.106

KACL.107

KACL.108







| 8034122365480 | Virgola No-Drop Touch - Built-in - 60 cm - Black - 800 m3/h |
|---------------|--|
| 8034122365473 | Virgola No-Drop Touch - Built-in - 60 cm - Inox - 800 m3/h |
| 8034122365503 | Virgola No-Drop Touch - Built-in - 75 cm - Black - 800 m3/h |
| 8034122365497 | Virgola No-Drop Touch - Built-in - 75 cm - Inox - 800 m3/h |
| 8034122365527 | Virgola No-Drop Touch - Built-in - 90 cm - Black - 800 m3/h |
| 8034122365510 | Virgola No-Drop Touch - Built-in - 90 cm - Inox - 800 m3/h |
| 8034122365466 | Virgola No-Drop Touch - Built-in - 120 cm - Black - 800 m3/h |
| 8034122365459 | Virgola No-Drop Touch - Built-in - 120 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KCVJN.01#3 | Chimney h 120 mm - Inox |
| KCVJN.00#3 | Telescopic chimney h 185 + h 185 mm - Inox |
| KCVJN.01#N | Chimney h 120 mm - Black |
| KCVJN.00#N | Telescopic chimney h 185 + h 185 mm - Black |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| | |

120 Falmec Virgola Touch 121 Virgola No-Drop Touch

Virgola Touch Virgola No-Drop Touch Virgola Touch NRS Virgola Move Parallel Gruppo Incasso Gruppo Incasso Pro Gruppo Incasso NRS Gruppo Incasso Murano Gruppo Incasso No-Drop Built-in Index A-Z



Virgola Touch NRS

Design Falmec Lab



Installation Built-in

Function Extracting/Filtering 60 cm/90 cm/120 cm **Dimensions** Materials/Finishes Stainless steel scotch brite

Painted steel black



Features Rotatable tempered glass flap with integrated control Protective flaps for the edge of the wall unit

NRS technology for a quieter kitchen

Control Touch control 3 + boost

Speed Min. speed 39 dB(A) Sound level

Max. speed 51 dB(A)

800 m³/h Motor

Filters Metallic grease filter, removable and washable Carbon. Zeo Microtech regenerable filter (optional)


Lighting


Dynamic Light
Dimmable lighting
60 cm: Strip LED 3,5 W - 2700 K / 5600 K
90/120 cm: Strip LED 5,8 W - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz Worktop minimum distance Induction 52 cm / Gas 52 cm

Net weight 19/21/23 kg

Energy class





Optional chimney

| Code | Description |
|---------------|---|
| 8034122368467 | Virgola Touch NRS - Built-in - 60 cm - Black - 800 m3/h |
| 8034122368092 | Virgola Touch NRS - Built-in - 60 cm - Inox - 800 m3/h |
| 8034122368474 | Virgola Touch NRS - Built-in - 90 cm - Black - 800 m3/h |
| 8034122368108 | Virgola Touch NRS - Built-in - 90 cm - Inox - 800 m3/h |
| 8034122368450 | Virgola Touch NRS - Built-in - 120 cm - Black - 800 m3/h |
| 8034122368085 | Virgola Touch NRS - Built-in - 120 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KCVJN.19#I | Chimney kit Virgola Touch NRS H 315 + extension H 295 - Inox |
| KCVJN.19#N | Chimney kit Virgola Touch NRS H 315 + extension H 295 - Black |
| KACL.400 | Silent / Conveyer NRS |
| | |

122 123 Virgola Touch NRS Falmec



Virgola

Design Falmec Lab

Control

Code

Installation Built-in

Function Extracting/Filtering Dimensions 60 cm/75 cm/90 cm/120 cm Materials/Finishes Stainless steel scotch brite

Painted steel black



Electronic control

Features Rotatable tempered glass flap

Protective flaps for the edge of the wall unit

Min. speed 47 dB(A) Sound level Max. speed 56 dB(A)

600 m³/h Motor

Metallic grease filter, removable and washable **Filters**

Charcoal filter (optional) Dimmable lighting Lighting

Dynamic Light LED 2x1,2 W - 2700 K / 5600 K


Voltage/Frequency 220-240V 50-60Hz


Worktop minimum distance Induction 52 cm / Gas 52 cm


9/10/11/13 kg Net weight

В Energy class










Description 8034122363462 Virgola - Evolution - Built-in - 60 cm - Black - 600 m3/h 8034122363448 Virgola - Evolution - Built-in - 60 cm - Inox - 600 m3/h 8034122365336 Virgola - Evolution - Built-in - 75 cm - Black - 600 m3/h Virgola - Evolution - Built-in - 75 cm - Inox - 600 m3/h 8034122363530 8034122363585 Virgola - Evolution - Built-in - 90 cm - Black - 600 m3/h 8034122363561 Virgola - Evolution - Built-in - 90 cm - Inox - 600 m3/h 8034122363370 Virgola - Evolution - Built-in - 120 cm - Black - 600 m3/h 8034122363356 Virgola - Evolution - Built-in - 120 cm - Inox - 600 m3/h Accessories KACL.960 Charcoal filter KCVJN.01#3 Chimney h 120 mm - Inox Telescopic chimney h 185 + h 185 mm - Inox KCVJN.00#3 KCVJN.01#N Chimney h 120 mm - Black KCVJN.00#N Telescopic chimney h 185 + h 185 mm - Black KACL.1059 Conveyer for air outlet (Ø150) Glass shelf 60 cm KACL.106 KACL.107 Glass shelf 90 cm KACL.108 Glass shelf 120 cm

Virgola 124 Falmec 125

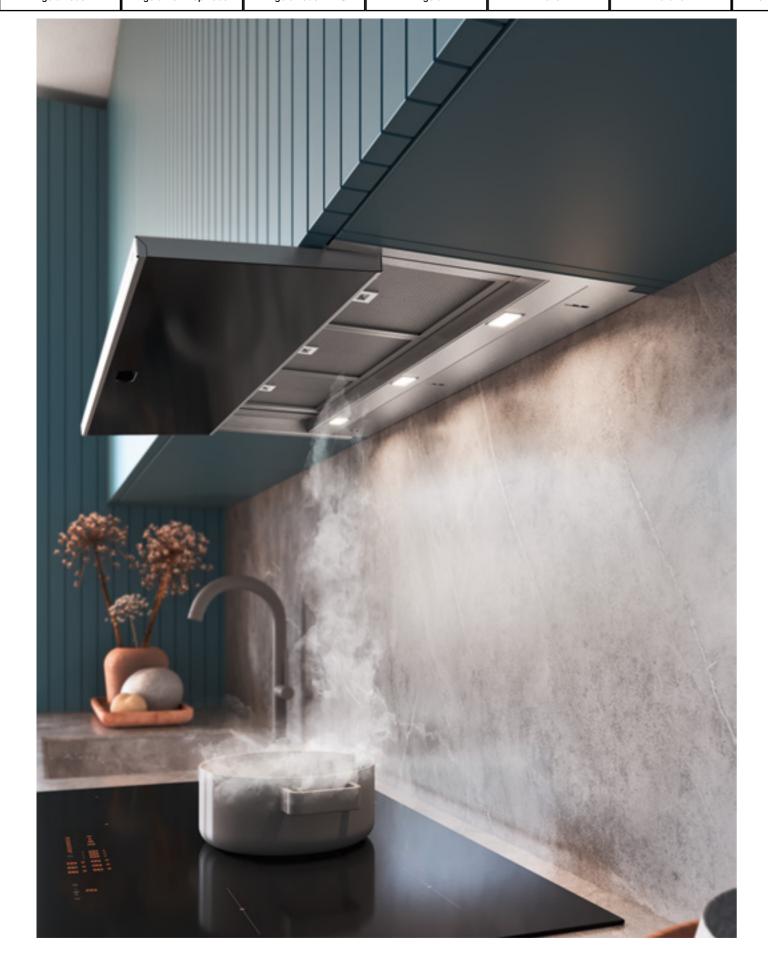

Move

Design Falmec Lab

Function

Speed

Installation Built-in

Extracting/Filtering **Dimensions** 60 cm/90 cm/120 cm Materials/Finishes Stainless steel scotch brite

Glass white/black



Features Sliding front with integrated control

Automatic switch-on when opening the panel

Control Electronic control

Sound level

Min. speed 49 dB(A) Max. speed 62 dB(A)

800 m³/h Motor

Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional) Filters

3 + boost


Lighting


Dimmable lighting
Dynamic Light
60 cm: LED 2x1,2 W - 2700 K / 5600 K
90/120 cm: LED 3x1,2 W - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz Worktop minimum distance Induction 52 cm / Gas 52 cm

Net weight 13/17/20 kg

В Energy class







Side view with optional chimneys

| Code | Description |
|---------------|---|
| 8034122352169 | Move - Built-in - 60 cm - Glass front black - 800 m3/h |
| 8034122352152 | Move - Built-in - 60 cm - Glass front white - 800 m3/h |
| 8034122352183 | Move - Built-in - 90 cm - Glass front black - 800 m3/h |
| 8034122352176 | Move - Built-in - 90 cm - Glass front white - 800 m3/h |
| 8034122353326 | Move - Built-in - 120 cm - Glass front black - 800 m3/h |
| 8034122353333 | Move - Built-in - 120 cm - Glass front white - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KCVJN.01#3 | Chimney h 120 mm - Inox |
| KCVJN.00#3 | Telescopic chimney h 185 + h 185 mm - Inox |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |
| KACL.106 | Glass shelf 60 cm |
| KACL.107 | Glass shelf 90 cm |
| KACL.108 | Glass shelf 120 cm |
| | |

126 Falmec 127 Move Virgola No-Drop Touch

Virgola

Index A-Z

Parallel

Built-in prestige

Our Parallel built-in hood stands out due to its flexibility and elegance, and the fact that it can be easily adapted to the most traditional kitchen designs, guaranteeing optimal performance with refined look. In terms of style, it represents a break from traditional built-in hoods thanks to two parallel light strips integrated into its structure that allow you to modulate between warm and cold tones. Its motor can be rotated to best take

advantage of the cabinet's internal space when fitting your kitchen according to your needs. Parallel is furthermore equipped with Dialogue System technology, permitting it to be controlled from Falmec induction hobs. It is also available in a filtering version with an exclusive Carbon.Zeo filter, which guarantees exceptional performance when it comes to air filtration and moisture absorption, even in recirculation mode, without ducting.


Move





White



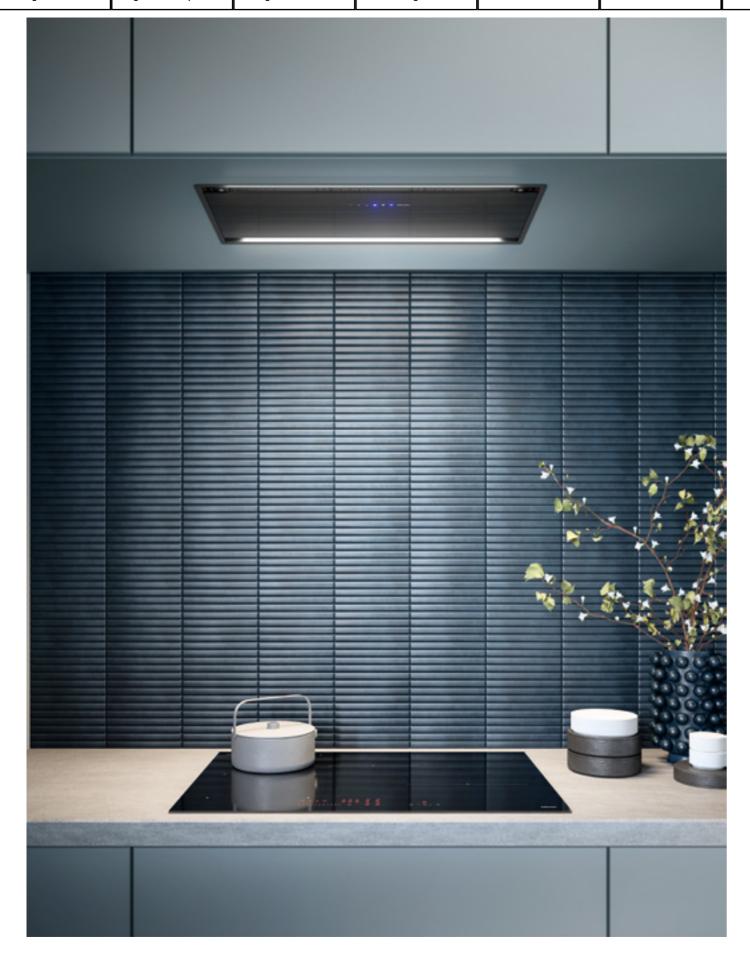

Parallel

Design Falmec Lab

Motor

Installation Built-in

Function Extracting/Filtering

Dimensions 76 cm

Painted steel white/black Glass white/black Materials/Finishes

Features Perimeter suction

Motor rotatable in 4 directions

Dual lighting

Touch control Control Remote control included

Dialogue system 🛜

Speed 3 + boost

Min. speed 50 dB(A) Max. speed 63 dB(A) Sound level

800 m³/h

Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional) **Filters**

Lighting Dimmable lighting


Dynamic Light Strip LED - 2700 K / 5600 K


220-240V 50-60Hz Voltage/Frequency


Induction 150 cm / Gas 150 cm Worktop maximum distance Worktop minimum distance Induction 52 cm / Gas 52 cm


9 kg Net weight В Energy class













Cut-out 285 mm x 711 mm

Possible air outlet directions

| Description |
|--|
| Parallel - Built-in - 76 cm - Black - 800 m3/h |
| Parallel - Built-in - 76 cm - White - 800 m3/h |
| |
| Carbon.Zeo Microtech regenerable filter |
| Conveyer for air outlet (Ø150) |
| |

130 Falmec 131 Parallel Virgola

Index A— Z

Gruppo Incasso

Seamless integration

With its extremely thin steel frame, Gruppo Incasso is designed to seamlessly integrate with your kitchen's design, aligning perfectly with the bottom edge of the cabinet. With an extremely minimal design, its perimeter suction guarantees excellent performance, while its removable induction hobs that feature Dialogue panel makes it equally easy to clean. A strip with Dynamic LED Light technology guarantees excellent lighting of the

cooking area while at the same time adapting to the various environments, allowing you to modulate between warm and cold light tones. Available in different versions, all models in our Gruppo Incasso line can be combined with Falmec System: another useful function to help you in your kitchen.

Move







Virgola Touch Virgola No-Drop Touch Virgola Touch NRS Virgola Move Parallel Gruppo Incasso Gruppo Incasso Pro Gruppo Incasso NRS Gruppo Incasso Murano Gruppo Incasso No-Drop Built-in Index A-Z



White - 50 cm



Black - 70 cm



Inox - 105 cm

Gruppo Incasso

Design Falmec Lab

Installation Built-in

Function Extracting/Filtering 50 cm/70 cm/105 cm **Dimensions**

Stainless steel (AISI 304) scotch brite Painted steel white/black Materials/Finishes

Features Control Electronic control Remote control (optional)
Dialogue system

Speed 3 + boost

Min. speed 50 dB(A) Sound level Max. speed 63 dB(A)

800 m³/h Motor

Metallic grease filter, removable and washable Filters Charcoal filter (optional)

Lighting


Dimmable lighting Dynamic Light 50 cm: Strip LED 2x1,7 W - 2700 K / 5600 K 70 cm: Strip LED 2x2,3 W - 2700 K / 5600 K 105 cm: Strip LED 2x3 W - 2700 K / 5600 K


220-240V 50-60Hz Voltage/Frequency


Worktop minimum distance Induction 52 cm / Gas 62 cm

Net weight 8/9/15 kg Energy class A/B









Cut-out 50 cm: 262 x 506 mm

70 cm: 262 x 751 mm

105 cm: 262 x 1029 mm

| Code | Description |
|---------------|--|
| 8034122367194 | Gruppo Incasso - Plus - Built-in - 50 cm - Black - 800 m3/h |
| 8034122367187 | Gruppo Incasso - Plus - Built-in - 50 cm - Inox - 800 m3/h |
| 8034122367170 | Gruppo Incasso - Plus - Built-in - 50 cm - White - 800 m3/h |
| 8034122367231 | Gruppo Incasso - Plus - Built-in - 70 cm - Black - 800 m3/h |
| 8034122367224 | Gruppo Incasso - Plus - Built-in - 70 cm - Inox - 800 m3/h |
| 8034122367217 | Gruppo Incasso - Plus - Built-in - 70 cm - White - 800 m3/h |
| 8034122367163 | Gruppo Incasso - Plus - Built-in - 105 cm - Black - 800 m3/h |
| 8034122367156 | Gruppo Incasso - Plus - Built-in - 105 cm - Inox - 800 m3/h |
| 8034122367149 | Gruppo Incasso - Plus - Built-in - 105 cm - White - 800 m3/h |
| Accessories | |
| 103050091 | Round charcoal filter Ø170 mm - Type 6 |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| 105080053 | Remote control |

Virgola Touch Virgola No-Drop Touch Virgola Touch NRS Virgola Move Parallel Gruppo Incasso Gruppo Incasso Pro Gruppo Incasso NRS Gruppo Incasso Murano Gruppo Incasso No-Drop Built-in Index A-Z



Gruppo Incasso Pro

Design Falmec Lab

Speed

Installation Built-in

Function Extracting/Filtering

Dimensions 80 cm

Materials/Finishes Stainless steel (AISI 304) scotch brite

Features Professional Buffle filters with liquid collector Electronic control Control

Remote control (optional)

Dialogue system 🛜 3 + boost

Sound level

Min. speed 53 dB(A) Max. speed 64 dB(A)

950 m³/h

Motor

Filters Professional Baffle Filters


Dimmable lighting Dynamic Light Strip LED 2x1,8 W - 2700 K / 5600 K Lighting

220-240V 50-60Hz

Voltage/Frequency Induction 52 cm / Gas 60 cm Worktop minimum distance

Net weight 13 kg Energy class Α






Cut-out 245 x 762 mm

| Code | Description |
|---------------|--|
| 8034122367545 | Gruppo Incasso Pro - Plus - Built-in - 80 cm - Inox - 950 m3/h |
| Accessories | |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| 105080053 | Remote control |
| - | |

138 139 Gruppo Incasso Pro Falmec

Gruppo Incasso NRS Gruppo Incasso Murano Gruppo Incasso No-Drop Built-in Index A-Z

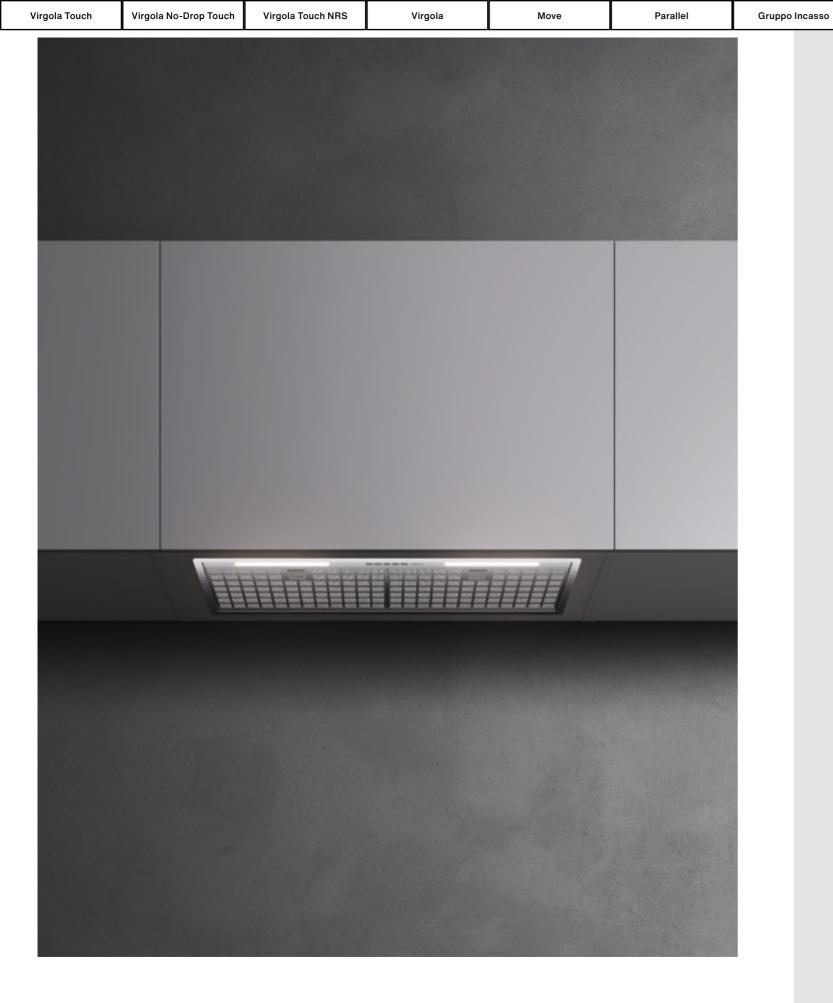

Gruppo Incasso NRS

Design Falmec Lab

Gruppo Incasso Pro



Installation Built-in

Function Extracting/Filtering 50 cm/70 cm **Dimensions**

Materials/Finishes Stainless steel (AISI 304) scotch brite

Features NRS technology for a quieter kitchen Control Electronic control

Remote control included

Dialogue system 🛜

Speed 3 + boost

Sound level Min. speed 38 dB(A) Max. speed 50 dB(A)

Motor

Metallic grease filter, removable and washable **Filters** Carbon.Zeo Microtech regenerable filter (optional)

Dimmable lighting Dynamic Light Lighting


50 cm: Strip LED 2x1,7 W - 2700 K / 5600 K 70 cm: Strip LED 2x2,3 W - 2700 K / 5600 K

220-240V 50-60Hz Voltage/Frequency

Worktop minimum distance Induction 52 cm / Gas 63 cm

22/23 kg Net weight Energy class Α






70 cm: 262 x 751 mm

| Code | Description |
|---------------|--|
| 8034122367200 | Gruppo Incasso NRS - Plus - Built-in - 50 cm - Inox - 800 m3/h |
| 8034122367248 | Gruppo Incasso NRS - Plus - Built-in - 70 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |

Gruppo Incasso NRS 140 Falmec 141

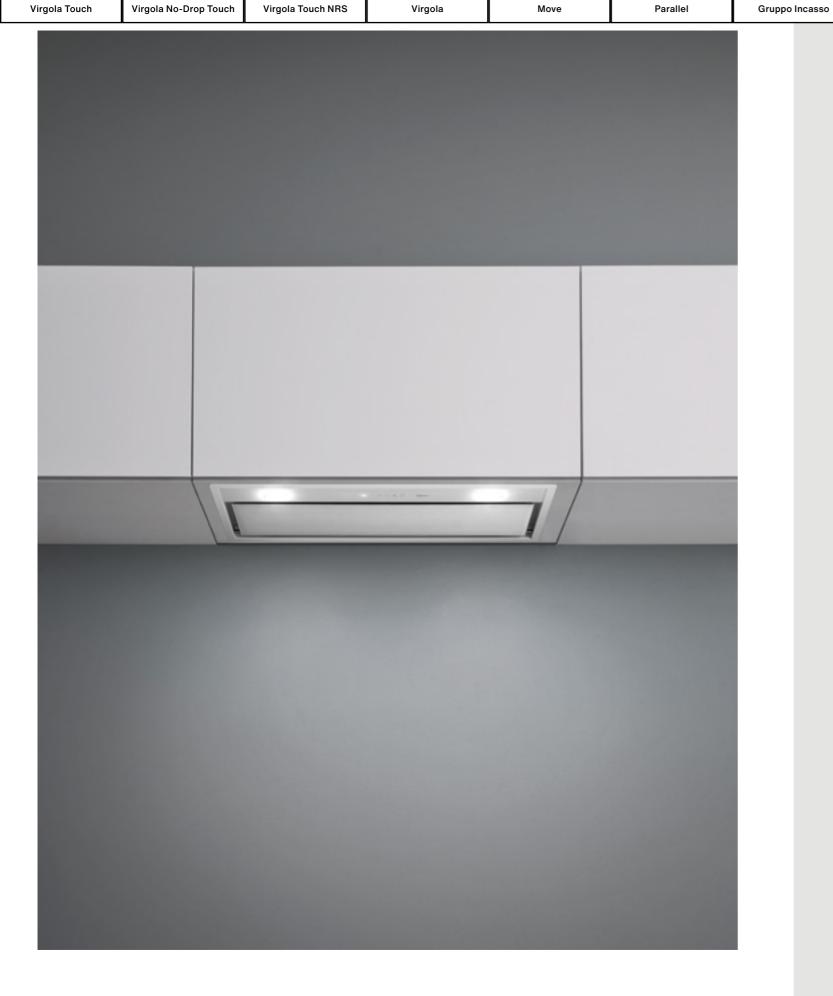

Gruppo Incasso Murano

Design Falmec Lab

Installation Built-in

Function Extracting/Filtering **Dimensions** 50 cm/70 cm

Materials/Finishes Painted steel white/black Glass white/black

Features

Remote control included Control Dialogue system 🛜

3 + boost Speed

Min. speed 49 dB(A) Max. speed 61 dB(A) Sound level

800 m³/h Motor

Metallic grease filter, removable and washable Charcoal filter Filters

Dynamic Light

Lighting LED 2x2,4 W - 2700 K / 5600 K


Voltage/Frequency 220-240V 50-60Hz

Induction 52 cm / Gas 62 cm Worktop minimum distance

Net weight 8/10 kg В Energy class







Cut-out 50 cm: 262 x 506 mm 70 cm: 262 x 751 mm

| Code | Description |
|---------------|---|
| 8034122359458 | Gruppo Incasso Murano - Built-in - 50 cm - Black - 800 m3/h |
| 8034122348391 | Gruppo Incasso Murano - Built-in - 50 cm - White - 800 m3/h |
| 8034122359465 | Gruppo Incasso Murano - Built-in - 70 cm - Black - 800 m3/h |
| 8034122348407 | Gruppo Incasso Murano - Built-in - 70 cm - White - 800 m3/h |
| Accessories | |
| 103050091 | Round charcoal filter Ø170 mm - Type 6 |
| KACL.1059 | Conveyer for air outlet (Ø150) |



Gruppo Incasso No-Drop

Design Falmec Lab



Installation Built-in

Function Extracting/Filtering
Dimensions 90 cm

.....

Materials/Finishes Stainless steel (AISI 304) scotch brite

Features Emptyable liquid collector

No-Drop System anti-condensation technology

Control Electronic control

Remote control (optional)
Dialogue system

peea 3 + 000s

Sound level Min. speed 51 dB(A)
Max. speed 64 dB(A)

Motor 800 m³/h

Filters Charcoal filter (optional)

Anti-condensation no-drop filter in technopolymer

Lighting Dimmable lighting Dynamic Light

Strip LED 2x1,8 W - 2700 K / 5600 K


220-240V 50-60Hz

Worktop minimum distance Induction 52 cm / Gas 62 cm

Net weight 12 kg
Energy class A

Voltage/Frequency





Cut-out 267 x 807 mm

| Code | Description |
|---------------|--|
| 8034122367262 | Gruppo Incasso No-Drop - Plus - Built-in - 90 cm - Inox - 800 m3/h |
| Accessories | |
| 103050091 | Round charcoal filter Ø170 mm - Type 6 |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| 105080053 | Remote control |
| - | |



Built-in

Design Falmec Lab

Installation Built-in Function Extracting/Filtering

Dimensions 50 cm/70 cm Materials/Finishes Stainless steel scotch brite

Control Electronic control

Speed Sound level

Min. speed 47 dB(A) Max. speed 65 dB(A) 600 m³/h

Motor

Metallic grease filter, removable and washable Charcoal filter (optional) **Filters**

Lighting

Dynamic Light Dimmable lighting LED 2x1,2 W - 2700 K / 5600 K


220-240V 50-60Hz


Voltage/Frequency

Worktop minimum distance Induction 52 cm / Gas 62 cm

Net weight 5/7 kg В Energy class







Cut-out 50 cm: 506 mm x 262 mm 70 cm: 751 mm x 262 mm

| Code | Description |
|---------------|---|
| 8034122504575 | Built-in - Evo - Built-in - 50 cm - Inox - 600 m3/h |
| 8034122504582 | Built-in - Evo - Built-in - 70 cm - Inox - 600 m3/h |
| Accessories | |
| 103050091 | Round charcoal filter Ø170 mm - Type 6 |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| | |

Falmec 147 Built-in 146





Ceiling

Suitable for open-plan spaces with adjoining kitchen and living areas, these hoods extract fumes and vapours that naturally float upwards, eliminating odours and improving air quality. Falmec has a multitude of ceiling options, and is able to completely satisfy a range of aesthetic and technical requirements thanks to the possibility of combining various motors and extremely compact installation options - ideal for spaces with reduced height.

149 Ceiling





Alba

Technological transparency

and combined with a glass frame - the only that can be painted to perfectly match visible element of the entire system - make the colour of the ceiling if required. Alba an ideal ceiling solution for those who Winner of the 2018 Good Design Award, prefer an understated, elegant style. The glass frame traces a clean, transparent prestigious designers Saggia & Sommella, line, which is set off by a light that also illuminates the hob. In addition to its

A functional heart built into in a false ceiling perimeter suction, it has a white panel Alba was conceived in collaboration with who expressed their experience in lighting design.





151 Alba Alba Vega Nuvola Nuvola 140 Nube Mirage Stella Index A-Z

Alba

Design Saggia - Sommella

Installation Ceiling

Extracting/Filtering Function

Dimensions 120 cm

Tempered glass Painted steel white Materials/Finishes

Features Perimeter suction

Perimeter LED Lighting
Possibility of painting the panel

Control Electronic control Remote control included

Dialogue system 🛜

Speed 3 + boost

Min. speed 50 dB(A) Sound level

Max. speed 64 dB(A)

Motor Motor sold separately

Metallic grease filter, removable and washable **Filters** Combined regenerable Carbon.Zeo filter (optional)

LED (4000 K) Lighting


220-240V 50-60Hz Voltage/Frequency

Induction 150 cm / Gas 150 cm Worktop maximum distance


45 kg Net weight Energy class С


Data with motor 950 m3/h

For more information on installation options and technical details, see the dedicated section at the end of the catalogue (p.329)

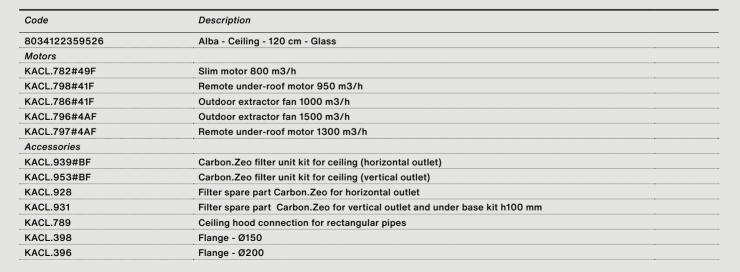


Under-roof motor installed on the hood






Slim motor (only on hood)






Remote units

Junction (KACL.789) for connecting rectangular pipes







Cut-out 603 x 1200 mm

Possible air outlet directions

Possible directions





Vega

A "star" in the kitchen

Falmec's exclusive Circle. Tech technology applied to a ceiling hood, integrating the perimeter suction and filtering functions into a single solution, to ensure optimal efficiency while taking up minimal space. All this with a design made up of symmetrical segments, which form a harmonious, vertical graphic motif that is enclosed by a frame available in a white,

black or stainless steel finish.


Vega's perfect geometry is enriched by a large tempered glass shade, which is illuminated by Dynamic LED Light technology, allowing you to modulate the tone of the light. The filtering apparatus is concealed to ensure minimal aesthetics and easy access to the Carbon.Zeo filter, twice as effective as traditional filters.



Black



Alba Vega Nuvola Nuvola 140 Nube Mirage Stella Index A-Z

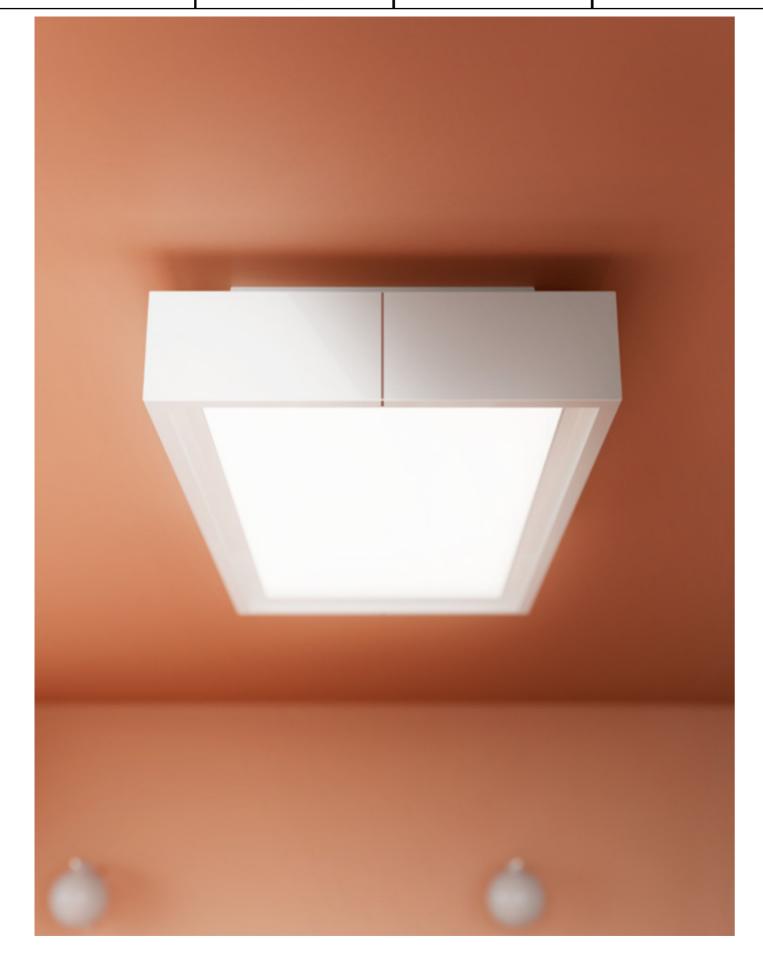

Vega

Design Emo Design



Installation Ceiling Function Filtering **Dimensions** 115 cm

Materials/Finishes Painted steel white/black



Features Perimeter suction Diffuse illumination

Circle.Tech technology

Electronic control Remote control included Control

Dialogue system 🛜

3 + boost Speed

Min. speed 48 dB(A) Sound level Max. speed 60 dB(A)

Motor 600 m³/h

Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter **Filters**

Dimmable lighting Dynamic Light Strip LED - 2700 K / 5600 K


Lighting

Voltage/Frequency 220-240V 50-60Hz

Worktop maximum distance Induction 150 cm / Gas 150 cm

45 kg Net weight





| Code | Description |
|---------------|---|
| 8034122477176 | Vega - Ceiling - 115 cm - Black - 600 m3/h |
| 8034122477169 | Vega - Ceiling - 115 cm - White - 600 m3/h |
| Accessories | |
| KACL.1048 | Regenerable Carbon.Zeo Microtech filters for Circle.Tech hoods (spare part) |
| | |


156 Falmec 157 Vega

Nuvola

Luminous presence

The combination of metal and glass makes mounted into a false ceiling, it can also Nuvola a stylish object of design mounted in the ceiling above the hob that, in addition of different colours. What's more, its raised to guaranteeing customisable suction power, provides a useful light source that can also be modulated between colder and warmer tones, according to your living with Falmec induction hobs via Dialogue room's use or ambience. Although suited to modern contexts when discreetly

be set off against the latter in a play position frees up space, including that of the wall beneath it, in which other kitchen elements, communicating directly System technology, can be installed.

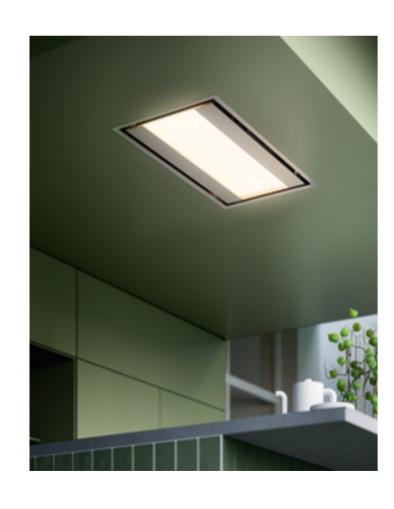



Alba Vega Nuvola Nuvola 140 Nube Mirage Stella Index A— Z

Nuvola 90

Design Falmec Lab

Installation Ceiling

Function Extracting/Filtering

Dimensions 90 cm

Materials/Finishes Painted steel white

Tempered glass

Stainless steel (AISI 304) scotch brite



Features Perimeter suction Diffuse illumination

Control Electronic control

Remote control included

Dialogue system 🛜

Speed 3 + boost

Min. speed 48 dB(A) Sound level

Max. speed 62 dB(A)

Motor Motor sold separately

Metallic grease filter, removable and washable **Filters**

Carbon.Zeo regenerable filter (optional)

Carbon.Zeo Microtech regenerable filter (optional)

Dimmable lighting Dynamic Light Strip LED - 2700 K / 5600 K

220-240V 50-60Hz

Voltage/Frequency Induction 150 cm / Gas 150 cm Worktop maximum distance

27 kg Net weight

B/C Energy class

Data with motor 950 m3/h


Lighting



For more information on installation options and technical details, see the dedicated section at the end of the catalogue (p.329)


| Code | Description |
|---------------|--|
| 8034122363127 | Nuvola 90 - Ceiling - 90 cm - LED - Inox |
| 8034122363110 | Nuvola 90 - Ceiling - 90 cm - LED - White |
| Motors | |
| KACL.782#49F | Slim motor 800 m3/h |
| KACL.798#41F | Remote under-roof motor 950 m3/h |
| KACL.786#41F | Outdoor extractor fan 1000 m3/h |
| KACL.796#4AF | Outdoor extractor fan 1500 m3/h |
| KACL.797#4AF | Remote under-roof motor 1300 m3/h |
| Accessories | |
| KACL.939#BF | Carbon.Zeo filter unit kit for ceiling (horizontal outlet) |
| KACL.953#BF | Carbon.Zeo filter unit kit for ceiling (vertical outlet) |
| KACL.931 | Filter spare part Carbon.Zeo for vertical outlet and under base kit h100 mm |
| KACL.928 | Filter spare part Carbon.Zeo for horizontal outlet |
| KACL.1049 | Carbon.Zeo Microtech regenerable filter for "plug and play installation" (ceiling hoods up to L100 cm) |
| KACL.1064#BF | Grid for air outlet for ceiling hoods with "plug and play" filters - White |
| KACL.789 | Ceiling hood connection for rectangular pipes |
| KACL.396 | Flange - Ø200 |
| KACL.398 | Flange - Ø150 |


Under-roof motor installed on the hood





Slim motor (only on hood)





Remote units



Junction (KACL.789) for connecting rectangular pipes





Cut-out 505 x 940 mm

Possible air outlet directions



Possible directions for Slim motor air outlets



Alba Vega Nuvola Nuvola 140 Nube Mirage Stella Index A— Z

Nuvola 140

Design Falmec Lab

Installation Ceiling

Function Extracting/Filtering

Dimensions 140 cm

Materials/Finishes Painted steel white

Tempered glass

Stainless steel (AISI 304) scotch brite



Features Perimeter suction Diffuse illumination

Control Electronic control Remote control included

Dialogue system 🛜

Speed 3 + boost

Min. speed 48 dB(A) Sound level Max. speed 62 dB(A)

Motor sold separately

Motor

Metallic grease filter, removable and washable **Filters**

Carbon.Zeo regenerable filter (optional)

Carbon.Zeo Microtech regenerable filter (optional)

Dimmable lighting Dynamic Light Strip LED - 2700 K / 5600 K

220-240V 50-60Hz Voltage/Frequency

Induction 150 cm / Gas 150 cm Worktop maximum distance

40 kg Net weight С Energy class


Data with motor 950 m3/h


Lighting

For more information on installation options and technical details, see the dedicated section at the end of the catalogue (p.329)


| Code | Description |
|---------------|---|
| 8034122363189 | Nuvola 140 - Ceiling - 140 cm - LED - Inox |
| 8034122363172 | Nuvola 140 - Ceiling - 140 cm - LED - White |
| Motors | |
| KACL.782#49F | Slim motor 800 m3/h |
| KACL.798#41F | Remote under-roof motor 950 m3/h |
| KACL.786#41F | Outdoor extractor fan 1000 m3/h |
| KACL.796#4AF | Outdoor extractor fan 1500 m3/h |
| KACL.797#4AF | Remote under-roof motor 1300 m3/h |
| Accessories | |
| KACL.939#BF | Carbon.Zeo filter unit kit for ceiling (horizontal outlet) |
| KACL.953#BF | Carbon.Zeo filter unit kit for ceiling (vertical outlet) |
| KACL.928 | Filter spare part Carbon.Zeo for horizontal outlet |
| KACL.931 | Filter spare part Carbon.Zeo for vertical outlet and under base kit h100 mm |
| KACL.1050 | Carbon.Zeo Microtech regenerable filter for "plug and play installation" (ceiling hoods over L100 cm) |
| KACL.1064#BF | Grid for air outlet for ceiling hoods with "plug and play" filters - White |
| KACL.789 | Ceiling hood connection for rectangular pipes |
| KACL.398 | Flange - Ø150 |
| KACL.396 | Flange - Ø200 |


Under-roof motor installed on the hood






Slim motor (only on hood)





Remote units



Junction (KACL.789) for connecting rectangular pipes and remote motors





Cut-out 590 x 1325 mm

Possible air outlet directions



Possible directions for Slim motor air outlets



Nube

Perfect integration

Invisible, efficient and silent, Nube is a simple, geometric object which, thanks to a range of finishes and sizes, fits perfectly into the ceilings of modern, minimal spaces. Like the other Falmec ceiling hoods, Nube Nube gives you the complete freedom of choice in personalised lighting that is completely detached from the hood, while maintaining its primary suction function. You can choose from a range of accessory absorption, even in recirculation mode.

Vega

motors, according to your power requirements, and the space available in the false ceiling.

is also available in a filtering version with an exclusive Carbon.Zeo filter, which guarantees exceptional performance when it comes to air filtration and moisture





Nube

Design Falmec Lab

Installation Ceiling

Function Extracting/Filtering

Dimensions 90 cm

Materials/Finishes Painted steel white

Stainless steel (AISI 304) scotch brite



FeaturesPerimeter suctionControlElectronic control

Remote control included Dialogue system 🛜

Speed 3 + boost

Min. speed 48 dB(A) Max. speed 62 dB(A)

Motor sold separately

Filters

Metallic grease filter, removable and washable
Carbon.Zeo regenerable filter (optional)

Carbon.Zeo Microtech regenerable filter (optional)

Lighting No lighting

Voltage/Frequency 220-240V 50-60Hz

Worktop maximum distance Induction 150 cm / Gas 150 cm

Net weight 23 kg
Energy class B


Data with motor 950 m3/h


Sound level

For more information on installation options and technical details, see the dedicated section at the end of the catalogue (p.329)


| Code | Description |
|---------------|--|
| 8034122363233 | Nube - Ceiling - 90 cm - Inox |
| 8034122363226 | Nube - Ceiling - 90 cm - White |
| Motors | |
| KACL.782#49F | Slim motor 800 m3/h |
| KACL.798#41F | Remote under-roof motor 950 m3/h |
| KACL.786#41F | Outdoor extractor fan 1000 m3/h |
| KACL.796#4AF | Outdoor extractor fan 1500 m3/h |
| KACL.797#4AF | Remote under-roof motor 1300 m3/h |
| Accessories | |
| KACL.939#BF | Carbon.Zeo filter unit kit for ceiling (horizontal outlet) |
| KACL.953#BF | Carbon.Zeo filter unit kit for ceiling (vertical outlet) |
| KACL.928 | Filter spare part Carbon.Zeo for horizontal outlet |
| KACL.931 | Filter spare part Carbon.Zeo for vertical outlet and under base kit h100 mm |
| KACL.1049 | Carbon.Zeo Microtech regenerable filter for "plug and play installation" (ceiling hoods up to L100 cm) |
| KACL.1064#BF | Grid for air outlet for ceiling hoods with "plug and play" filters - White |
| KACL.789 | Ceiling hood connection for rectangular pipes |
| KACL.398 | Flange - Ø150 |
| KACL.396 | Flange - Ø200 |

Under-roof motor installed on the hood





Slim motor (only on hood)





Remote units



Junction (KACL.789) for connecting rectangular pipes and remote motors





Cut-out 505 x 940 mm

Possible air outlet directions under-roof/on hood motor



Possible directions for Slim motor air outlets



Nuvola

Nube

Nuvola 140

Mirage

Integrated minimalism

The design of Mirage is characterised by a refined and timeless aesthetic that combines form and functionality. The hood brushless motor, rotatable in four integrates perfectly into the kitchen almost directions, ensures easy installation, silent invisibly, creating a bright atmosphere thanks to two thin LED strips with dynamic

Vega


and dimmable light, to best suit the furnishing context. Finally, a compact operation and effective extraction.



White



Alba Vega Nuvola Nuvola 140 Nube Mirage Stella Index A— Z

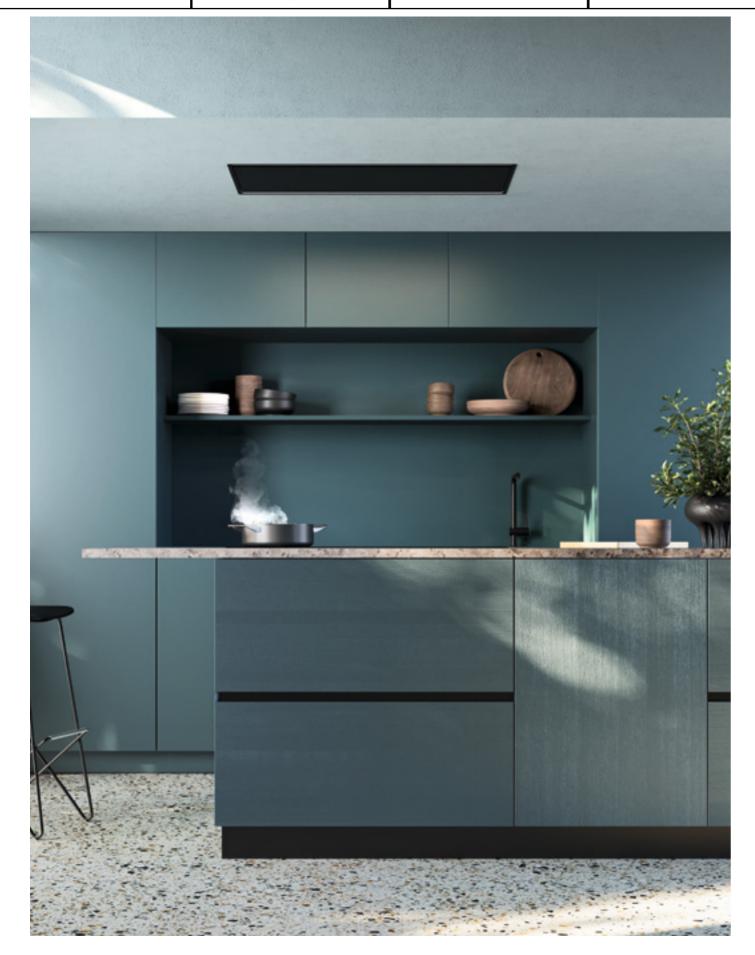

Mirage

Design Falmec Lab

Installation Ceiling

Function Extracting/Filtering

Dimensions 100 cm

Stainless steel (AISI 304) scotch brite Painted steel black/white Materials/Finishes



Features Perimeter suction **Dual lighting**

Electronic control Control Remote control included

Dialogue system 🛜

Speed 3 + boost

Min. speed 40 dB(A) Sound level Max. speed 57 dB(A) Brushless Motor 800 m³/h Motor

Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional) Filters


Lighting

Dynamic Light Dimmable lighting Strip LED 2x20 W - 2700 K / 5600 K


220-240V 50-60Hz Voltage/Frequency

Worktop maximum distance Induction 150 cm / Gas 150 cm

25 kg Net weight Energy class









Cut-out 502 x 985 mm

Side view


Frontal view

Possible directions for Slim motor air outlets

| Code | Description |
|---------------|---|
| 8034122369785 | Mirage - Ceiling - 100 cm - Black - 800 m ³ /h |
| 8034122369778 | Mirage - Ceiling - 100 cm - Inox - 800 m ³ /h |
| 8034122369761 | Mirage - Ceiling - 100 cm - White - 800 m ³ /h |
| Accessories | |
| KACL.939#BF | Carbon.Zeo filter unit kit for ceiling (horizontal outlet) |
| KACL.953#BF | Carbon.Zeo filter unit kit for ceiling (vertical outlet) |
| KACL.928 | Filter spare part Carbon.Zeo for horizontal outlet |
| KACL.931 | Filter spare part Carbon.Zeo for vertical outlet and under base kit h100 mm |
| KACL.1050 | Carbon.Zeo Microtech regenerable filter for "plug and play installation" (ceiling hoods over L100 cm) |
| KACL.1064#BF | Grid for air outlet for ceiling hoods with "plug and play" filters - White |

Available from July 2025

170 Falmec 171 Mirage



Stella

A light of its own

Inspired by a celestial body, and endowed with its very own light, Stella brings style to your kitchen ceiling. With customisable suction power and lighting tone that can be modulated between warm and cold tones Stella is embellished with two LED

Vega

strips, almost as if to define with precision its luminous effect on the hob.

Further proof of Stella's versatility is the

Further proof of Stella's versatility is the fact that it is available in different finishes and sizes, depending on your aesthetic and space requirements.



lnov

172



Index A— Z Alba Vega Nuvola Nuvola 140 Nube Mirage Stella

Stella

Design Falmec Lab

Installation Ceiling

Function Extracting/Filtering Dimensions 90 cm/120 cm

Materials/Finishes

Painted steel white/black Stainless steel (AISI 304) scotch brite



Features Perimeter suction Electronic control Control

Remote control included Dialogue system 🛜

3 + boost Speed

Min. speed 48 dB(A) Sound level Max. speed 63 dB(A)

Motor sold separately Motor

Metallic grease filter, removable and washable Combined regenerable Carbon.Zeo filter (optional) Filters

Carbon.Zeo Microtech regenerable filter (optional)

Dimmable lighting Dynamic Light Lighting

LED Strip 2x8 W - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz

Worktop maximum distance Induction 150 cm / Gas 150 cm

В

Net weight 22/27 kg

Energy class


Data with motor 950 m3/h

For more information on installation options and technical details, see the dedicated section at the end of the catalogue (p.329)




| Code | Description |
|---------------|--|
| 8034122368580 | Stella - Plus - Ceiling - 90 cm - LED - Black |
| 8034122368573 | Stella - Plus - Ceiling - 90 cm - LED - Inox |
| 8034122368566 | Stella - Plus - Ceiling - 90 cm - LED - White |
| 8034122368542 | Stella - Plus - Ceiling - 120 cm - LED - White |
| 8034122368559 | Stella - Plus - Ceiling -120 cm - LED - Inox |
| Motors | |
| KACL.782#49F | Slim motor 800 m3/h |
| KACL.798#41F | Remote under-roof motor 950 m3/h |
| KACL.786#41F | Outdoor extractor fan 1000 m3/h |
| KACL.796#4AF | Outdoor extractor fan 1500 m3/h |
| KACL.797#4AF | Remote under-roof motor 1300 m3/h |
| Accessories | |
| KACL.939#BF | Carbon.Zeo filter unit kit for ceiling (horizontal outlet) |
| KACL.953#BF | Carbon.Zeo filter unit kit for ceiling (vertical outlet) |
| KACL.928 | Filter spare part Carbon.Zeo for horizontal outlet |
| KACL.931 | Filter spare part Carbon.Zeo for vertical outlet and under base kit h100 mm |
| KACL.1049 | Carbon.Zeo Microtech regenerable filter for "plug and play installation" (ceiling hoods up to L100 cm) |
| KACL.1050 | Carbon.Zeo Microtech regenerable filter for "plug and play installation" (ceiling hoods over L100 cm) |
| KACL.1064#BF | Grid for air outlet for ceiling hoods with "plug and play" filters - White |
| KACL.789 | Ceiling hood connection for rectangular pipes |
| KACL.398 | Flange - Ø150 |
| KACL.396 | Flange - Ø200 |


Under-roof motor installed on the hood





Slim motor (only on hood)





Remote units





Junction (KACL.789) for connecting rectangular pipes and remote motors



Cut-out 90 cm: 505 x 940 mm 120 cm: 505 x 1240 mm

Possible air outlet directions under-roof/on hood motor



Possible directions for Slim motor air outlets



Worktop Built-in Ceiling Island Wall/Island Wall Index A— Z



Island

The kitchen is taking on an ever more central role, not only in terms of house design, but also with regard to its inhabitants. Effective extraction has therefore become a fundamental element in ensuring a healthy and welcoming home environment. Lighting is also important not only in the cooking area, but also in order to create a pleasant ambience.

177 Island

Light

Dama


Spazio

Innovative personality

Spazio 130

Originating from an innovative design idea, However, what make Spazio truly unique Spazio transforms functionality into an extraordinary experience. It was designed in order to make the most of available space and offer greater practicality. Its 180 cm island supporting structure features handy smoked glass shelves,a space with kitchen utensil hooks and a LED lighting system to illuminate the worktop.

are its accessories and additional features: from USB ports and electrical outlets for charging electronic devices, to its tablet holder and optional space for a small indoor herb garden. This hood also features Falmec's patented Circle.Tech system and Carbon.Zeo filter technology, twice as effective in retaining odours and moisture.

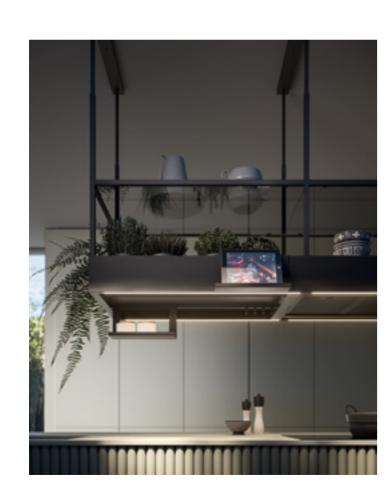

















Lumen Isola 175 Spazio 130 Light Elle Zenith NRS Soffio Index A-Z Spazio Europa 175 Lumen Isola 175 Levante Vetra Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna

Spazio

Design Francesco Lucchese

Speed

Motor

Installation Island **Function** Filtering **Dimensions** 180 cm Materials/Finishes

Stainless steel scotch brite Glass smoked

Painted steel black

Features Equipped with power outlets and USB ports Several accessories and additional functionalities available:

ladle hanger, spices shelf, tablet holder, and plants growing kit

Circle.Tech technology

Remote control included Control Dialogue system 🛜

3 + boost

Sound level Min. speed 48 dB(A) Max. speed 60 dB(A)

Filters Metallic grease filter, removable and washable

Carbon.Zeo Microtech regenerable filter


Lighting Dimmable lighting Dynamic Light


LED Strip 4x10 W - 2700 K / 5600 K

220-240V 50-60Hz

Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 65 cm

67 kg Net weight








KACL.748#IF KACL.748#HF *maximum height with rod extension: 1550 mm.







KACL.744#IF

| Code | Description |
|---------------|---|
| 8034122476964 | Spazio - Island - 180 cm - Black - 600 m3/h |
| 8034122476957 | Spazio - Island - 180 cm - Inox - 600 m3/h |
| Accessories | |
| KACL.1048 | Regenerable Carbon.Zeo Microtech filters for Circle.Tech hoods (spare part) |
| KACL.748#IF | Rods h945 mm - Inox |
| KACL.748#HF | Rods h945 mm - Black |
| KACL.745#IF | Light for plant growing area |
| KACL.744#IF | Kit 2 trays for plant growing area |
| KACL.746#IF | Tissue holder - Inox |
| KACL.746#HF | Tissue holder (Black) |

Spazio 130

Design Francesco Lucchese

Control

0

Installation Island **Function** Filtering 130 cm **Dimensions** Painted steel black Materials/Finishes Glass smoked

Features Equipped with power outlets and USB ports Several accessories and additional functionalities available:

ladle hanger, spices shelf, tablet holder, and plants growing kit

Circle.Tech technology

Electronic control

Remote control included

Dialogue system 🛜

3 + boost Speed

Sound level Min. speed 48 dB(A) Max. speed 60 dB(A)

Motor 600 m³/h

Filters Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter


Dimmable lighting

Lighting Dynamic Light

LED Strip 2x14 W - 2700 K / 5500 K 220-240V 50-60Hz

Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 65 cm

52 kg Net weight












KACI 746#HF



KACL.741#IF

KACL.743#IF

| Code | Description |
|---------------|---|
| 8034122477640 | Spazio 130 - Island - 130 cm - Black - 600 m3/h |
| Accessories | |
| KACL.1048 | Regenerable Carbon.Zeo Microtech filters for Circle.Tech hoods (spare part) |
| KACL.742#HF | Rods h945 mm - Black |
| KACL.743#IF | Light for plant growing area |
| KACL.741#IF | Kit 2 trays for plant growing area |
| KACL.746#HF | Tissue holder (Black) |

182 Falmec 183 Spazio 130 Spazio



Light

Levante

Europa 175

Spazio 130

Evolved functionality

The Europa 175 island model is the next step in the evolution of one the Falmec products that has proved most popular, due to its functionality. Inspired by professional kitchens, with its extensive glass shelf and equipped kitchen utensil holder, Europa 175 meets both suction and version that absorbs odours and reduces practical requirements.

Thanks to its new matt black painted steel finish, in line with the latest colour trends,

Europa 175 is an elegant solution for your kitchen island.

Dynamic, dimmable lighting ensures excellent worktop visibility while creating a pleasant atmosphere.

Europa 175 is also available in a filtering moisture, thanks to its innovative Carbon.Zeo filters.







Lumen Isola 175 Spazio Spazio 130 Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z



Europa 175

Design Falmec Lab

Lighting

Installation Island Function Extracting/Filtering

Dimensions 175 cm

Materials/Finishes Painted steel black

Glass smoked

Features Perimeter suction

Area equipped with ladle holder

Electronic control Control Remote control (optional)
Dialogue system

Speed 3 + boost

Min. speed 49 dB(A) Sound level Max. speed 62 dB(A)

800 m³/h Motor

Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional) **Filters**

Dimmable lighting Dynamic Light LED Strip 4x10 W - 2700 K / 5600 K


220-240V 50-60Hz

Voltage/Frequency

Worktop minimum distance Induction 52 cm / Gas 63 cm

67 kg Net weight Energy class В





Suction area 90 cm on the side of the chimney

| Code | Description |
|---------------|--|
| 8034122365688 | Europa 175 - Island - 175 cm - Black - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KACL.557#N | Extension chimney H1200 Island - Black |
| KACL.1027#HF | Extension rod kit H1250 - Black |
| KACL.866 | Air flow conveyor for re-circulation versions (Island) |
| 105080053 | Remote control |

186 Falmec 187 Europa 175

Lumen Isola 175 Spazio Spazio 130 Europa 175 Light Lumen Isola 175 Zenith NRS Levante 188 Falmec

Light

Vetra

Luminous lightness

Inspired by the principle "less is more",
Light's simplicity makes it unique and
versatile at the same time. Two aluminium
profiles enclose an ultra-compact suction
body, thanks to innovative Multi-Air
technology, while two smoked glass
shelves add an additional element of
functionality and beauty. LED strips are
integrated into the external anodised

Vogue

Sophie

Sophie Lamp

Dama

aluminium profiles, ensuring diffused lighting over the whole hood surface while generating pleasant, characteristic lines of light. In addition to the matt black version, the reflections generated by its new bronze finish accentuate its minimal form, enriching your kitchen environment with timeless emotions.

Mare E.ion

Index A-Z














189 Light

Lumen Isola 175 Spazio Spazio 130 Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z

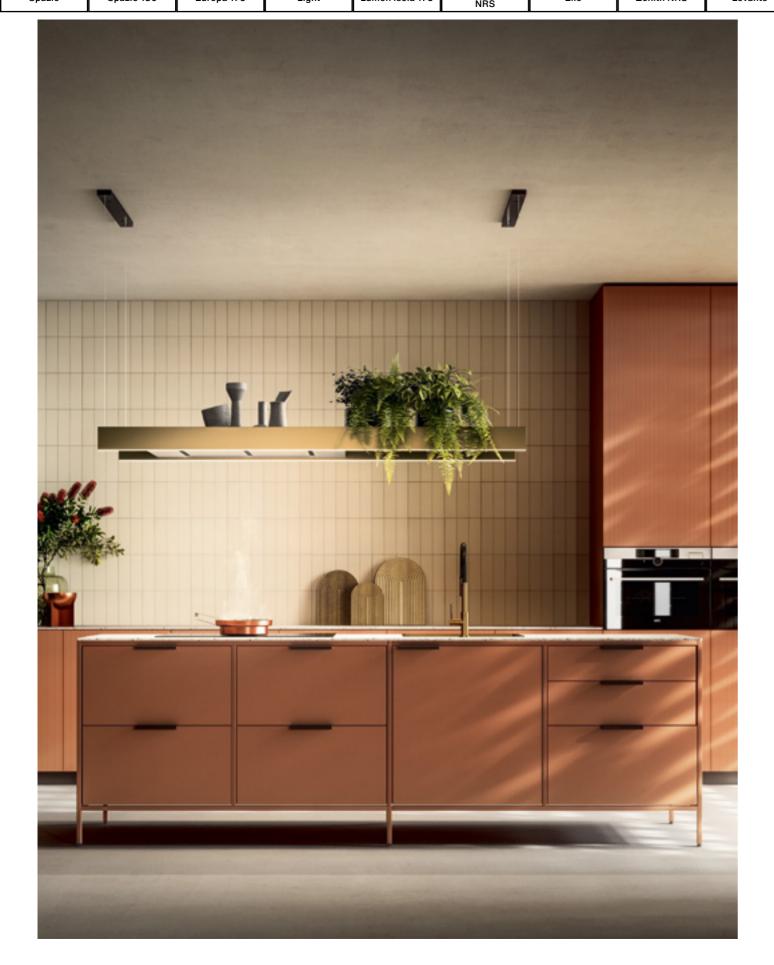

Light

Lighting

Design Falmec Lab

Installation Island Function Filtering **Dimensions** 120 cm/180 cm

Anodized aluminium black/bronze Painted steel black Materials/Finishes

Glass smoked



Features

Ultra slim body Profile-integrated lighting Multi-Air technology

Electronic control Control Remote control included Dialogue system

Min. speed 43 dB(A) Max. speed 62 dB(A) Sound level

Motor Brushless Motor 500 m³/h Filters


Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter


LED Strip (3000K)

220-240V 50-60Hz Voltage/Frequency Induction 52 cm / Gas 65 cm Worktop minimum distance

Net weight 31/40 kg







| Code | Description |
|---------------|--|
| 8034122362878 | Light - Island - 120 cm - Black - 500 m3/h |
| 8034122364872 | Light - Island - 120 cm - Bronze - 500 m3/h |
| 8034122362885 | Light - Island - 180 cm - Black - 500 m3/h |
| 8034122364889 | Light - Island - 180 cm - Bronze - 500 m3/h |
| Accessories | |
| KACL.1057 | Pair Carbon.Zeo Microtech regenerable Light filters (spare part) |
| KACL.144 | Kit cables: adjustable up to 340 cm |

191 190 Falmec Light

Lumen Isola 175

Spazio 130

Protagonist in the kitchen

With its AISI 304 steel structure and imposing dimensions, Lumen Isola 175 is a spectacular presence. LED strips running along both sides provide the worktop with optimal illumination while at the same time diffusing evocative ambient light. Suction occurs along its perimeter near the extraction area, while its power is adjusted

via an electronic push-button panel located on the front. Utensils, containers and vases can be housed within its structure, further enhancing its role in the kitchen. Thanks to exclusive Silence NRS technology, it is incredibly silent when in operation: it is practically imperceptible.



Lumen Isola 175 Spazio 130 Light Elle Zenith NRS Vetra Soffio Mare E.ion Index A-Z Spazio Europa 175 Lumen Isola 175 Levante Vogue Sophie Sophie Lamp Dama Laguna

Lumen Island 175

Design Falmec Lab

Control

Installation Island

Function Extracting/Filtering 175 cm

Dimensions

Stainless steel (AISI 304) scotch brite Materials/Finishes



Features Perimeter suction LED ambient light

Electronic control

3 + boost Speed

Min. speed 49 dB(A) Sound level Max. speed 61 dB(A)

800 m³/h Motor


Filters Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional)


Lighting Strip LED (4000K) Voltage/Frequency 220-240V 50-60Hz

Induction 52 cm / Gas 64 cm Worktop minimum distance

48 kg Net weight Energy class С







Right version

Description Code 8034122363769 Lumen Island 175 - (Left) - Island - 175 cm - Inox - 800 m3/h 8034122363752 Lumen Island 175 - (Right) - Island - 175 cm - Inox - 800 m3/h Accessories KACL.1039 Carbon.Zeo Microtech regenerable filter KACL.557#I Extension chimney H1200 Island - Inox KACL.866 Air flow conveyor for re-circulation versions (Island) KACL.815 Protective cleaning cloths for stainless steel (box 10 pcs)

Lumen Island 175 NRS

Design Falmec Lab

Control

Installation

Island Function Extracting/Filtering

175 cm **Dimensions**

Materials/Finishes Stainless steel (AISI 304) scotch brite

Features Perimeter suction LED ambient light

NRS technology for a quieter kitchen

Electronic control

Remote control (optional)

Dialogue system

Speed 3 + boost


Min. speed 37 dB(A) Sound level Max. speed 46 dB(A)


Motor 800 m³/h

Metallic grease filter, removable and washable **Filters** Carbon. Zeo Microtech regenerable filter (optional)

Strip LED (4000K) Lighting 220-240V 50-60Hz Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 64 cm

Net weight 58 kg С **Energy class**





| Right version |
|---------------|
|---------------|

| Code | Description |
|---------------|--|
| 8034122362908 | Lumen Island 175 NRS - (Left) - Island - 175 cm - Inox - 800 m3/h |
| 8034122362892 | Lumen Island 175 NRS - (Right) - Island - 175 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KACL.572#I | Extension chimney H1200 Island - Inox |
| KACL.400 | Silent / Conveyer NRS |
| 105080053 | Remote control |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |
| | |

Lumen Island 175 NRS 194 Lumen Island 175 195

Elle

Vetra

Elle

Refined presence

Spazio 130

With its large dimensions and refined design, Elle is suited to convivial and open-plan spaces. Its rigorous forms are finishedin a sophisticated matt black shade, enhancing its linearity and creating a striking contrast with the LED light extending along its lengthy edges. Elle's electronic push-button panel allows you to adjust suction according to 4

speeds, and is centrally located in order to accommodate chimney installation on either the right or left, as required. Elle is equipped with a powerful 800 m3/h motor and is also available as a recirculation version with Carbon.Zeo filters, which combine the natural antiodour properties of coal and moisture reduction capabilities of zeolite.



196

Lumen Isola 175 NRS Spazio Spazio 130 Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z



Elle

Design Falmec Lab

Installation Island Function Extracting/Filtering

Dimensions 180 cm Materials/Finishes Painted steel black

Features Perimeter suction **Dual lighting** Electronic control Control

Remote control (optional)
Dialogue system

3 + boost Speed Sound level

Min. speed 49 dB(A) Max. speed 61 dB(A)

800 m³/h Motor

Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional) Filters


Dimmable lighting Dynamic Light LED Strip 4x10 W - 2700 K / 5600 K Lighting

220-240V 50-60Hz

Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 63 cm

51 kg Net weight С Energy class






Suction area 90 cm on the side of the chimney

| Code | Description |
|---------------|--|
| 8034122362533 | Elle - Island - 180 cm - Black - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KACL.557#N | Extension chimney H1200 Island - Black |
| KACL.866 | Air flow conveyor for re-circulation versions (Island) |
| 105080053 | Remote control |
| | |

198 Falmec 199 Elle

Lumen Isola 175 Spazio 130 Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z

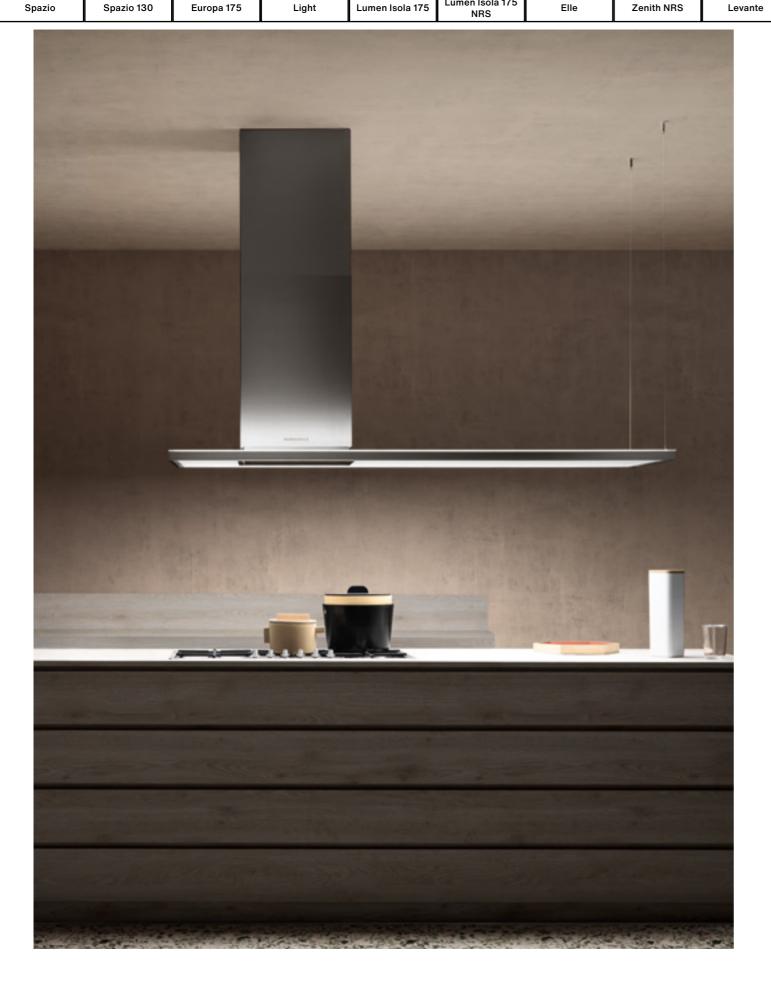

Zenith NRS

Design Vittore Niolu



Installation Island Function Extracting/Filtering

Dimensions 180 cm

Materials/Finishes

Stainless steel (AISI 304) scotch brite Tempered glass

Features Diffuse illumination

NRS technology for a quieter kitchen

Electronic control Control

Remote control (optional)
Dialogue system

3 + boost

Speed Min. speed 37 dB(A) Sound level

Max. speed 46 dB(A) 800 m³/h

Motor


Metallic grease filter, removable and washable **Filters** Carbon. Zeo Microtech regenerable filter (optional)

LED (5500K)

Lighting 220-240V 50-60Hz Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 60 cm

Net weight 32 kg Energy class С





| Code | Description |
|----------------|---|
| 8034122354866 | Zenith NRS - Island - Inox - 800 m3/h |
| 8034122710129* | Glass kit 180 cm |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KACL.400 | Silent / Conveyer NRS |
| 105080053 | Remote control |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

^{*}Hood is made by steel body and glass kit

200 Falmec 201 Zenith NRS

Levante

Design in motion

Spazio 130

Levante impresses not only due to its stylishly rigorous design, but even more so because of the way it moves, creating a dramatic visual effect in the kitchen. Thanks to its motorised Up/Down lift system, the hood can be lowered to the desired position and later repositioned in the ceiling. A steel panel with backing illuminated with Dynamic Light technology, Carbon.Zeo filter.

which guarantees optimal lighting and varying light tone, is housed in a sophisticated white, black or graphite finished rectangular glass structure. Equipped with exclusive Circle.Tech technology, Levante guarantees homogeneous, silent suction and high filtration efficiency, thanks to its exclusive








Lumen Isola 175 Spazio Spazio 130 Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z





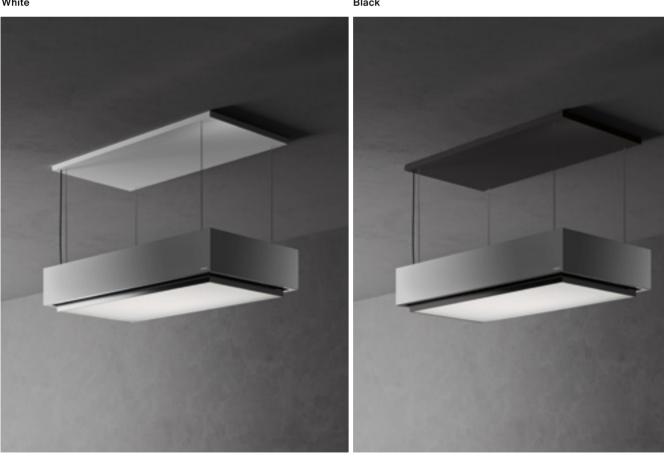

Graphite Graphite "All matt"

Levante

Design Falmec Lab

Control



Installation Island Filtering Function Dimensions 120 cm Materials/Finishes

Glass black/white Satin glass graphite/graphite "All matt"

Features Perimeter suction Diffuse illumination

Up/Down lift system with height adjustment Circle.Tech technology

Remote control included Dialogue system 🛜

Speed 3 + boost

Min. speed 48 dB(A) Sound level Max. speed 60 dB(A)

600 m³/h Motor

Metallic grease filter, removable and washable **Filters** Carbon.Zeo Microtech regenerable filter

Lighting Dynamic Light

LED 50 W - 2700K / 5600K


Voltage/Frequency 220-240V 50-60Hz


Worktop minimum distance Induction 52 cm / Gas 65 cm

Net weight 71 kg









| Code | Description |
|---------------|---|
| 8034122476933 | Levante - Island - 120 cm - Black - 600 m3/h |
| 8034122478418 | Levante - Island - 120 cm - Graphite "All matt" - 600 m³/h |
| 8034122477664 | Levante - Island - 120 cm - Graphite - 600 m3/h |
| 8034122477183 | Levante - Island - 120 cm - White - 600 m3/h |
| Accessories | |
| KACL.1048 | Regenerable Carbon.Zeo Microtech filters for Circle.Tech hoods (spare part) |

204 Falmec 205 Levante Light

Soffio

Vetra

Vetra

Creative geometry

A minimal form suspended in the kitchen, in which metal joins glass to create a sophisticated play of light, Vetra's design is characterised by geometric shapes. In fact, light is diffused via an illuminated perimeter line, creating a pleasant, functional and ambient lighting effect.

Vetra incorporates exclusive Circle.Tech technology, guaranteeing maximum effectiveness in extracting cooking odours. A glass frame containing symbols corresponding to its various functions facilitates hood operation.





206

Lumen Isola 175 Spazio 130 Spazio Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z



Vetra

Speed

Lighting

Design Saggia - Sommella



Installation Island Function Filtering Dimensions 120 cm Materials/Finishes

Stainless steel (AISI 304) scotch brite Tempered glass Painted steel black

Perimeter LED Lighting Circle.Tech technology Features

Control Electronic control Remote control included
Dialogue system

3 + boost

Min. speed 48 dB(A) Sound level

Max. speed 60 dB(A)

600 m³/h Motor


Filters Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter

84 W (2700 K / 5500 K)

220-240V 50-60Hz Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 57 cm

41 kg Net weight



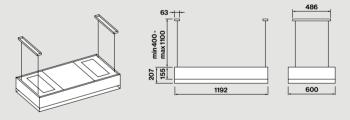

| Code | Description |
|---------------|---|
| 8034122478340 | Vetra - Island - 120 cm - Black - 600 m3/h |
| 8034122476797 | Vetra - Island - 120 cm - Inox - 600 m3/h |
| Accessories | |
| KACL.1048 | Regenerable Carbon.Zeo Microtech filters for Circle.Tech hoods (spare part) |
| KACL.144 | Kit cables: adjustable up to 340 cm |
| | |

208 Falmec 209 Vetra



Soffio

The magic of glass

A fascinating meeting of craftsmanship and technology, Soffio stands out thanks to its hand-blown white satin glass shell - recalling the millenary Murano glass blowing tradition -, which is mounted between two metal rings. The result is a suspended form in which hood

Vogue

Sophie

Sophie Lamp


Dama

and lamp merge to create a unique and iconic product that not only has an exciting design, but that also offers high performance.

Mare E.ion

Index A-Z

Exclusive Circle. Tech technology ensures effective suction, elimination of odours and silent operation.

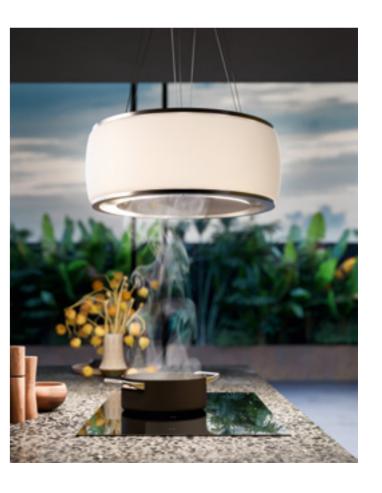

211 Soffio



Soffio

Design Falmec Lab

Control

Lighting



Installation Island Filtering Function Dimensions 54 cm Materials/Finishes Handmade blown glass white

Features

LED ambient light
Perimeter suction with tempered glass panel Circle.Tech technology

Rotary Switch

Remote control (optional)
Dialogue system

3 + boost Speed Min. speed 48 dB(A) Sound level

Max. speed 60 dB(A) Motor 600 m³/h

Filters


Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter

> LED 4x1,2 W - 4200 K 220-240V 50-60Hz

Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 56 cm

Net weight 21 kg







White painted ceiling support: adjustable rods from 44 to 110 cm included

| Code | Description |
|---------------|---|
| 8034122476735 | Soffio - Island - 58 cm - White satin glass - 600 m3/h |
| Accessories | |
| KACL.1048 | Regenerable Carbon.Zeo Microtech filters for Circle.Tech hoods (spare part) |
| KACL.143 | Kit cables: adjustable up to 340 cm |
| 105080053 | Remote control |
| | |

212 Falmec 213 Soffio

Vogue

Air and light in harmony

Spazio 130

Vogue traces a sinuous presence of light and matter in the kitchen with the iconic, elegant style of its circular, harmonious shape. This Circle. Tech model is a sophisticated hybrid of hood and lamp, designed to bring air and light together in complete harmony. A two-tone finish enhances its elegance, contrasting

the interior and exterior, while its glass dome is lit by a dynamic light. Its large dimensions allow for an equally large suction capacity - thanks to Circle. Tech technology - making it the absolute protagonist of your kitchen, while maintaining an innate lightness and adaptability to different situations.







Lumen Isola 175 Spazio 130 Spazio Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z



Iron gray



White

Vogue

Design Emo Design

Speed



Installation Island Filtering Function Dimensions 88 cm Materials/Finishes

Painted steel white/green/iron grey Painted interior gold



Features Perimeter suction with tempered glass panel

LED ambient light Circle.Tech technology

Rotary Switch Control Remote control (optional)
Dialogue system

3 + boost

Min. speed 47 dB(A) Max. speed 60 dB(A) Sound level

600 m³/h Motor


Filters Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter


Lighting Dynamic Light

LED 17 W - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz Induction 52 cm / Gas 53 cm


Worktop minimum distance Net weight 26 kg





| Code | Description |
|---------------|---|
| 8034122478319 | Vogue - Island - 88 cm - Green - 600 m3/h |
| 8034122478326 | Vogue - Island - 88 cm - Iron grey - 600 m3/h |
| 8034122478302 | Vogue - Island - 88 cm - White - 600 m3/h |
| Accessories | |
| KACL.1048 | Regenerable Carbon.Zeo Microtech filters for Circle.Tech hoods (spare part) |
| KACL.143 | Kit cables: adjustable up to 340 cm |
| 105080053 | Remote control |

216 217 Vogue Falmec

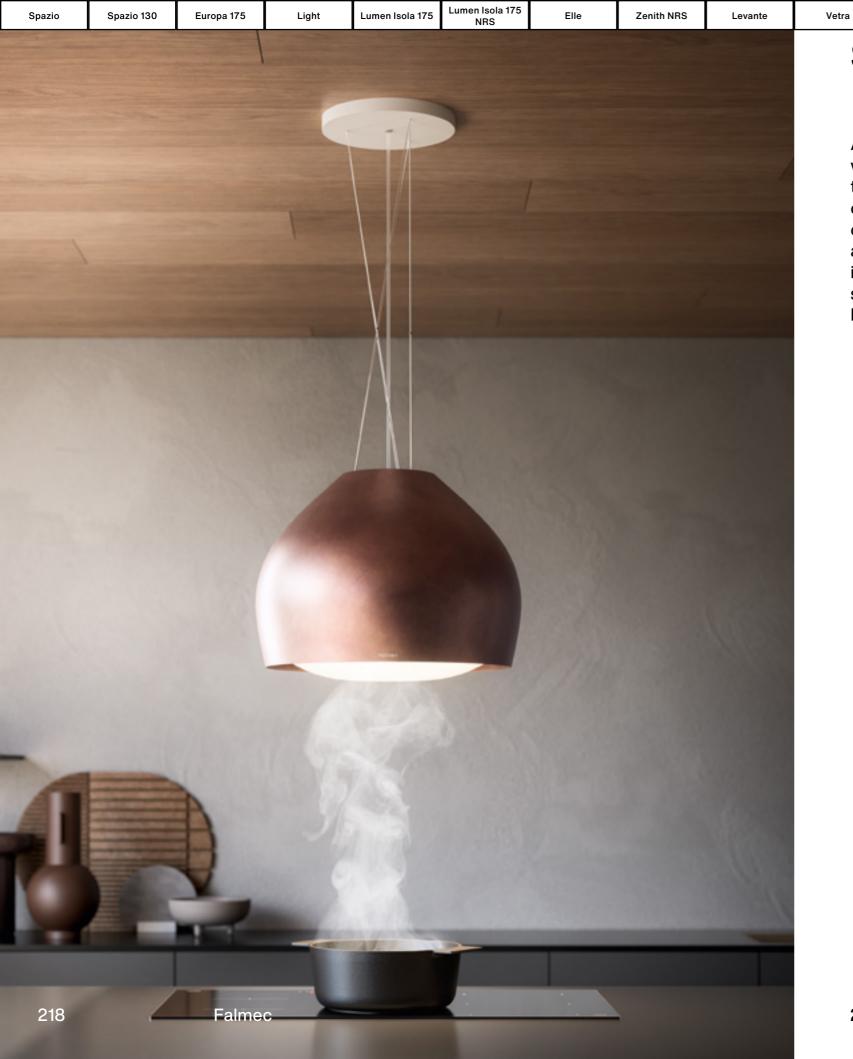

Sophie

Soffio

Seductive beauty

An iconic design item par excellence, with its sinuous shapes, Sophie fits into the kitchen environment with a touch of elegance, due to a combination of an illuminated convex glass panel and contrasting metal hood body that is available in a range of stylish finishes such as brass, copper or pewter.

Dynamic LED Light technology allows

Vogue

Sophie

Sophie Lamp

Dama


you to modulate light tone in order to create warmer or cooler atmospheres. Our Circle.Tech filtering system guarantees excellent efficiency and, at the same time, extremely low noise levels, improving your comfort at home. This hood can also be paired with Sophie Lamp lighting element for a perfectly matching kitchen.


Mare E.ion

Laguna

Index A-Z

219 Sophie

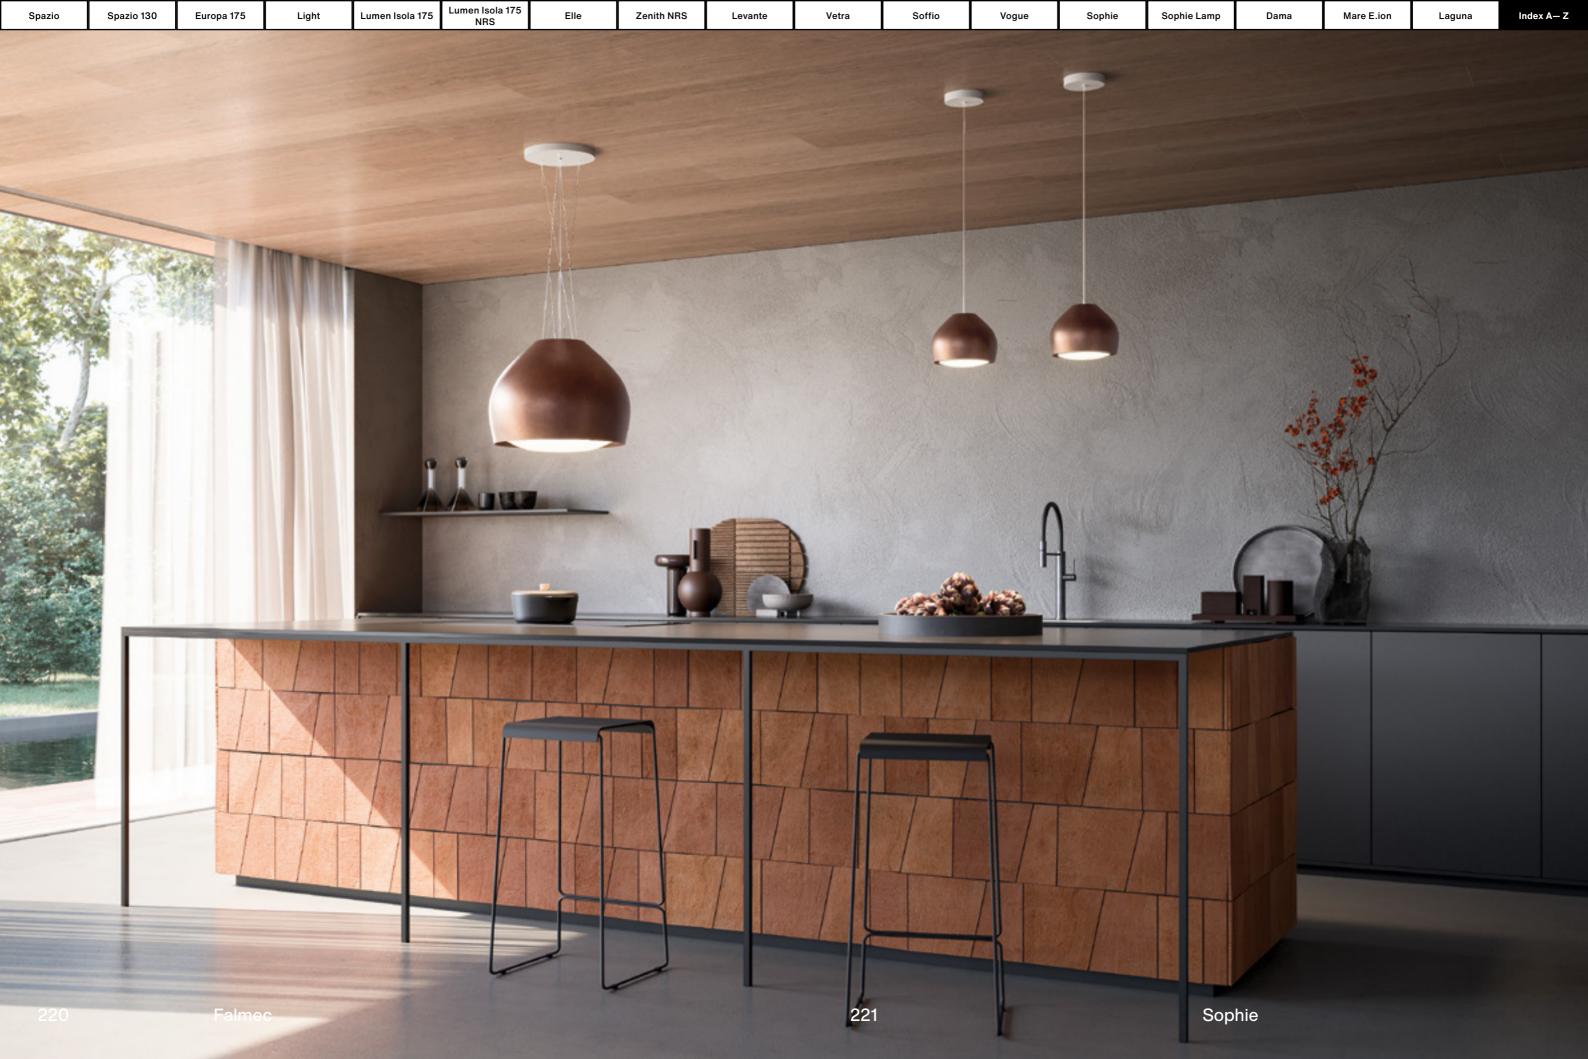

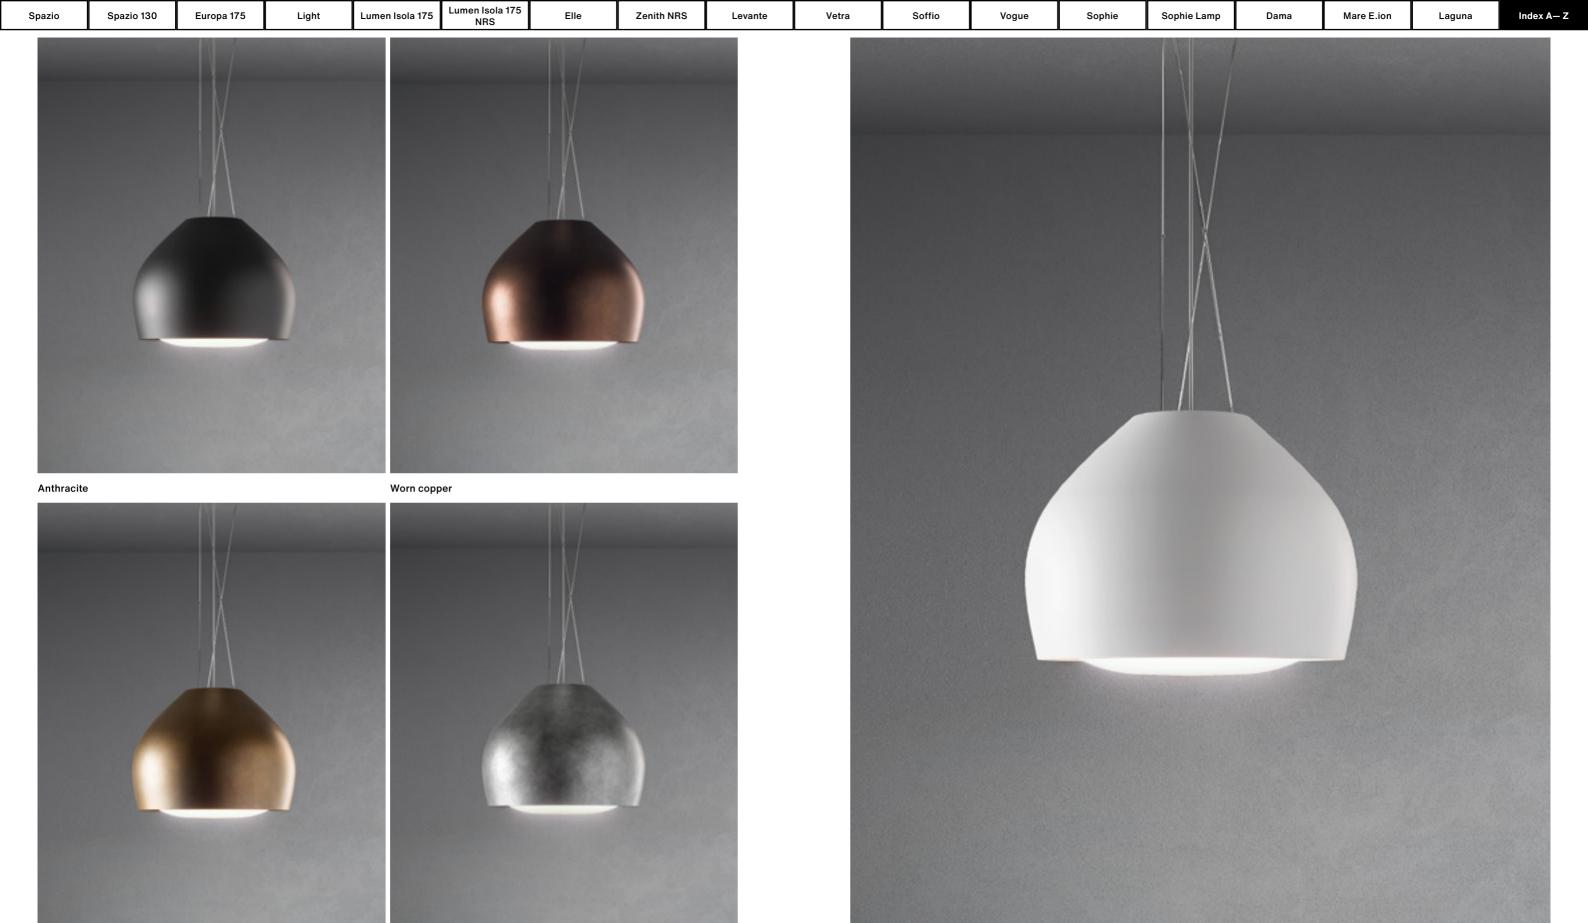

White

Falmec 223 Sophie

Pewter

Worn brass

Lumen Isola 175 Spazio 130 Spazio Europa 175 Light Lumen Isola 175 Elle Zenith NRS Vetra Soffio Sophie Sophie Lamp Mare E.ion Index A-Z Levante Vogue Dama Laguna

Sophie

Design Emo Design

Control



Installation Island Filtering **Function Dimensions** 54 cm Materials/Finishes Painted steel worn copper/white/worn brass/

anthracite/pewter



Features LED ambient light

Circle.Tech technology Rotary Switch

Remote control (optional)
Dialogue system

3 + boost

Speed Min. speed 47 dB(A) Sound level

Max. speed 60 dB(A)

600 m³/h Motor

Filters Metallic grease filter, removable and washable

Carbon.Zeo Microtech regenerable filter


Dynamic Light Lighting LED - 2700 K / 5600 K


220-240V 50-60Hz

Worktop minimum distance Induction 52 cm / Gas 53 cm

Net weight 21 kg

Voltage/Frequency







White painted ceiling support: adjustable rods from 44 to 110 cm included

| Code | Description | |
|---------------|---|--|
| 8034122358048 | Sophie - Island - 54 cm - Anthracite - 600 m³/h | |
| 8034122476773 | Sophie - Island - 54 cm - Pewter - 600 m³/h | |
| 8034122358031 | Sophie - Island - 54 cm - White - 600 m ³ /h | |
| 8034122476759 | Sophie - Island - 54 cm - Worn Brass - 600 m³/h | |
| 8034122476872 | Sophie - Island - 54 cm - Worn copper - 600 m³/h | |
| Accessories | | |
| KACL.1048 | Regenerable Carbon.Zeo Microtech filters for Circle.Tech hoods (spare part) | |
| KACL.143 | Kit cables: adjustable up to 340 cm | |
| 105080053 | Remote control | |

Sophie Lamp

Design Emo Design


Installation Island **Dimensions**

Materials / Finishes Painted steel worn copper/white/worn brass/ anthracite/pewter



Lighting LED - 4200 K





| Code | Description |
|--------------|-----------------------------------|
| KACL.162#J4F | Sophie -ø 22 cm lamp, Anthracite |
| KACL.162#V4F | Sophie -ø 22 cm lamp, Pewter |
| KACL.162#B4F | Sophie -ø 22 cm lamp, White |
| KACL.162#E4F | Sophie -ø 22 cm lamp, Worn Brass |
| KACL.162#A4F | Sophie -ø 22 cm lamp, Worn Copper |

224 Sophie 225 Sophie Lamp Falmec



Dama

Revolutionary design

It may look like a stylish oversized hanging lamp but Dama is at its best when extracting, thanks to Circle. Tech technology, which uses materials of natural origin, such as zeolite and activated carbon, for maximum effectiveness when retaining odours. Available in various metal finishes, including copper and painted steel,

Vogue

Sophie

Sophie Lamp

Dama

this hood has a characteristic streamlined design, and is embellished with an atmospheric LED light.

Mare E.ion


Index A— Z

A unique synthesis of function and emotion, Dama is the result of Falmec's research into achieving exceptional results regarding suction, filtration and silence, combined with an original approach to design.








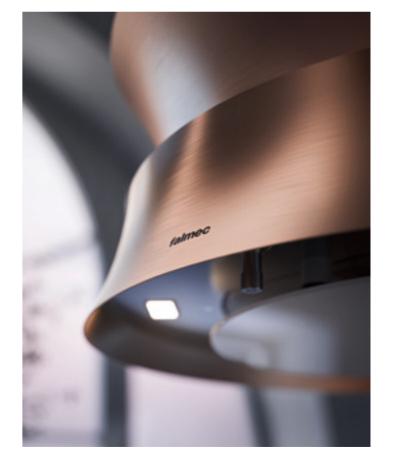

227 Dama

Lumen Isola 175 Spazio Spazio 130 Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z

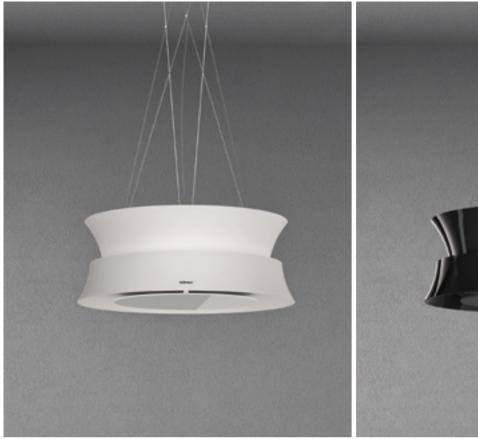



White Gunmetal



Copper

Dama

Design Emo Design

Speed

Lighting



Installation Island Function Filtering Dimensions 60 cm Materials/Finishes

Painted steel white/gunmetal Copper



Features

Perimeter suction with tempered glass panel

Circle.Tech technology

Rotary Switch Control

Remote control (optional)
Dialogue system

3 + boost

Min. speed 48 dB(A) Max. speed 60 dB(A) Sound level

600 m³/h Motor

Metallic grease filter, removable and washable Filters Carbon.Zeo Microtech regenerable filter

> LED 4x1,2 W - 4200 K 220-240V 50-60Hz

Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 56 cm

Net weight 20 kg







White painted ceiling support: adjustable rods from 44 to 110 cm included

| Code | Description |
|---------------|---|
| 8034122476728 | Dama - Island - 60 cm - Copper - 600 m3/h |
| 8034122476704 | Dama - Island - 60 cm - Gunmetal - 600 m3/h |
| 8034122357997 | Dama - Island - 60 cm - White - 600 m3/h |
| Accessories | |
| KACL.1048 | Regenerable Carbon.Zeo Microtech filters for Circle.Tech hoods (spare part) |
| KACL.143 | Kit cables: adjustable up to 340 cm |
| 105080053 | Remote control |

228 Falmec 229 Dama Elle

Soffio

Mare E.ion

Spazio 130

Atmosphere of well-being

With its soft, elegant design Mare E.ion Its sinuous white or black glass structure encloses exclusive E.ion System technology that constantly monitors the air you breathe in the kitchen via a special leaf-shaped display, which changes colour according to the environment's air purity.

Thanks to controlled bipolar ionisation, fits discreetly into the kitchen environment. Mare E.ion not only neutralises odours, but also reproduces the characteristics of the air of uncontaminated environments. A sea breeze, which can have a positive effect on people's well-being. Silently working in automatic mode, it restores and maintains a healthy, natural environment.





Lumen Isola 175 Spazio Spazio 130 Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z



Mare E.ion

Design Pareschi - atelierP

Filters

W)

Installation Island Function Filtering Dimensions 66 cm Materials/Finishes Glass white/black

Features Perimeter suction

lonising system for air purification

Touch control + leaf display for air quality Control

3 + boost Speed


Min. speed 56 dB(A) Sound level Max. speed 63 dB(A) 450 m³/h Motor


Top filter, removable and washable Carbon.Zeo regenerable filter Lighting LED light

LED 4x1,2 W - 3200 K

Voltage/Frequency 220-240V 50-60Hz Worktop minimum distance Induction 52 cm / Gas 60 cm

Net weight 29 kg







support: adjustable rods from 44 to 110 cm included

| Code | Description |
|---------------|--|
| 8034122347004 | Mare E.ion - Island - 66 cm - Black - 450 m3/h |
| 8034122346991 | Mare E.ion - Island - 66 cm - White - 450 m3/h |
| Accessories | |
| 101078810 | Carbon.Zeo regenerable filter |
| KACL.140 | Adjustable up to 240 cm steel wire rope |

232 Falmec 233 Mare E.ion

Lumen Isola 175 Spazio 130 Spazio Europa 175 Light Lumen Isola 175 Elle Zenith NRS Levante Vetra Soffio Vogue Sophie Sophie Lamp Dama Mare E.ion Laguna Index A-Z



Laguna

Design Falmec Lab

Features

Control

Speed

Filters

Installation Island Function Extracting/Filtering **Dimensions** 60 cm/90 cm Materials/Finishes Glass black/white Panels costomizable



Perimeter suction Electronic control 3 + boost

Min. speed 49 dB(A) Sound level Max. speed 61 dB(A) Motor 800 m³/h

Metallic grease filter, removable and washable Charcoal filter


Lighting Dynamic Light Dimmable lighting LED 4x1,2 W - 2700 K / 5600 K

220-240V 50-60Hz

Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 60 cm

Net weight 30/38 kg В Energy class





| Code | Description |
|----------------|---|
| 8034122349367* | Laguna - Hood body - Island - 60 cm - 800 m3/h |
| 8034122349374* | Laguna - Hood body - Island - 90 cm - 800 m3/h |
| Accessories | |
| KACL.887#F | White glass kit - Island 60 cm |
| KACL.887#N | Black glass kit - Island 60 cm |
| KACL.888#F | White glass kit - Island 90 cm |
| KACL.888#N | Black glass kit - Island 90 cm |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

^{*}A cover consisting of the glass accessory must be added to the stainless steel hood body. Alternatively, customised panels can be used.

234 Falmec 235 Laguna





Wall / Island

With their linear, geometric shapes these hoods seamlessly fit into any space and furnishing context. They guarantee excellent results in terms of odour elimination as well as improvement of kitchen air quality, and are available in either wall or island versions.

Many of the models in this category are available with ultra-quiet NRS technology, providing exceptional levels of comfort in the kitchen.

237 Wall / Island



Plane

Lumen NRS

Functionality meets aesthetics

Luce

Polar

Plane is characterised by clean shapes and useful features: a hood designed to suit a range of environments. Plane's value lies in its perfectly constructed details: an object that combines functionality with a clean, minimal design and that is available in various finishes. A perimeter suction panel not only guarantees stylistic precision, system, to the No Drop anti-condensation but also improved suction performance and ease of maintenance.

The cooking area is excellently illuminated by LED strips equipped with dynamic, dimmable lighting in order to create the right atmosphere at all times. This is combined with Falmec's exclusive innovations, thus improving quality of life in the kitchen: from its absolutely silent NRS system.

Mira

Index A-Z



Black

239 Plane



Plane Plane NRS Plane No-Drop Lumina NRS Lumen Lumen NRS Luce Polar Mira Index A-Z

Plane

Design Falmec Lab

Wall/Island Installation **Function** Extracting/Filtering Wall 90 cm/120 cm **Dimensions** Island 90 cm/120 cm

Materials/Finishes Stainless steel (AISI 304) scotch brite

Painted steel white/black

Features Control Electronic control Remote control (optional) Dialogue system

3 + boost Speed

Min. speed 51 dB(A) Sound level Max. speed 66 dB(A)

Motor

Metallic grease filter, removable and washable **Filters**

Carbon.Zeo Microtech regenerable filter (optional)

Lighting Dimmable lighting Dynamic Light

Strip LED - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz


Worktop minimum distance Induction 52 cm / Gas 60 cm


Wall 23/27 kg Net weight

Island 33/37 kg Wall A Energy class

Island B







| Code | Description |
|---------------|--|
| 8034122367132 | Plane - Plus - Wall - 90 cm - Black - 800 m3/h |
| 8034122367125 | Plane - Plus - Wall - 90 cm - Inox - 800 m3/h |
| 8034122367118 | Plane - Plus - Wall - 90 cm - White - 800 m3/h |
| 8034122367095 | Plane - Plus - Wall - 120 cm - Black - 800 m3/h |
| 8034122367088 | Plane - Plus - Wall - 120 cm - Inox - 800 m3/h |
| 8034122367071 | Plane - Plus - Wall - 120 cm - White - 800 m3/h |
| 8034122367064 | Plane - Plus - Island - 90 cm - Black - 800 m3/h |
| 8034122367057 | Plane - Plus - Island - 90 cm - Inox - 800 m3/h |
| 8034122367040 | Plane - Plus - Island - 90 cm - White - 800 m3/h |
| 8034122367033 | Plane - Plus - Island - 120 cm - Black - 800 m3/h |
| 8034122367026 | Plane - Plus - Island - 120 cm - Inox - 800 m3/h |
| 8034122367019 | Plane - Plus - Island - 120 cm - White - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KACL.1032#IF | Extension chimney H700 Wall - Inox |
| KACL.1033#IF | Extension chimney H960 Wall - Inox |
| KACL.1032#NF | Extension chimney H700 Wall - Black |
| KACL.1033#NF | Extension chimney H960 Wall - Black |
| KACL.1032#BF | Extension chimney H700 Wall - White |
| KACL.1033#BF | Extension chimney H960 Wall - White |
| KACL.557#I | Extension chimney H1200 Island - Inox |
| KACL.557#N | Extension chimney H1200 Island - Black |
| KACL.865 | Air flow conveyor for re-circulation version (Wall) |
| KACL.866 | Air flow conveyor for re-circulation versions (Island) |
| 105080053 | Remote control |

Plane NRS

Design Falmec Lab

Installation Wall/Island Function Extracting/Filtering Wall 90 cm/120 cm **Dimensions** Island 90 cm

Materials/Finishes Stainless steel (AISI 304) scotch brite

Painted steel black

Features Perimeter suction NRS technology for a quieter kitchen

Electronic control

Control Remote control (optional)
Dialogue system

Speed 3 + boost

Sound level Min. speed 38 dB(A) Max. speed 50 dB(A)

800 m³/h Motor

Metallic grease filter, removable and washable **Filters**

Carbon.Zeo Microtech regenerable filter (optional) Lighting Dimmable lighting

Dynamic Light Strip LED - 2700 K / 5600 K


220-240V 50-60Hz Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 60 cm

Net weight Wall 34/36 kg

Island 42 kg

Energy class Α



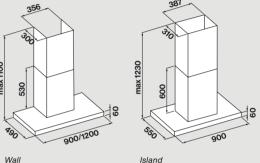

| Code | Description |
|---------------|--|
| 8034122367378 | Plane NRS - Plus - Wall - 90 cm - Black - 800 m3/h |
| 8034122367361 | Plane NRS - Plus - Wall - 90 cm - Inox - 800 m3/h |
| 8034122367354 | Plane NRS - Plus - Wall - 120 cm - Black - 800 m3/h |
| 8034122367347 | Plane NRS - Plus - Wall - 120 cm - Inox - 800 m3/h |
| 8034122367330 | Plane NRS - Plus - Island - 90 cm - Black - 800 m3/h |
| 8034122367323 | Plane NRS - Plus - Island - 90 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KACL.570#I | Extension chimney H700 Wall - Inox |
| KACL.571#I | Extension chimney H960 Wall - Inox |
| KACL.571#N | Extension chimney H960 Wall - Black |
| KACL.572#I | Extension chimney H1200 Island - Inox |
| KACL.572#N | Extension H1200 Island - Black |
| KACL.400 | Silent / Conveyer NRS |
| 105080053 | Remote control |

Plane NRS 242 243 Falmec Plane

Plane No-Drop Plane Plane NRS Lumina NRS Lumen Lumen NRS Luce Polar Mira Index A— Z



Plane No-Drop

Design Falmec Lab

Control



Installation Wall/Island Function Extracting/Filtering Wall 90 cm Island 90 cm **Dimensions**

Stainless steel (AISI 304) scotch brite Painted steel black Materials/Finishes

Features Emptyable liquid collector

No-Drop System anti-condensation technology Electronic control

Min. speed 49 dB(A) Sound level Max. speed 62 dB(A)


800 m³/h Motor

Anti-condensation no-drop filter in technopolymer **Filters** Carbon.Zeo Microtech regenerable filter (optional)


Lighting LED Strip (3000K) Voltage/Frequency 220-240V 50-60Hz Worktop minimum distance Induction 52 cm / Gas 63 cm

Wall 25 kg Net weight

Island 35 kg





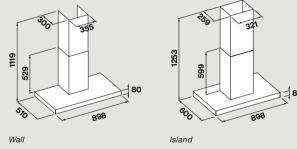

| Code | Description |
|---------------|---|
| 8034122362564 | Plane No-Drop - Wall - 90 cm - Black - 800 m3/h |
| 8034122362571 | Plane No-Drop - Wall - 90 cm - Inox - 800 m3/h |
| 8034122362540 | Plane No-Drop - Island - 90 cm - Black - 800 m3/h |
| 8034122362557 | Plane No-Drop - Island - 90 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KACL.570#I | Extension chimney H700 Wall - Inox |
| KACL.1032#NF | Extension chimney H700 Wall - Black |
| KACL.571#I | Extension chimney H960 Wall - Inox |
| KACL.1033#NF | Extension chimney H960 Wall - Black |
| KACL.557#I | Extension chimney H1200 Island - Inox |
| KACL.557#N | Extension chimney H1200 Island - Black |
| KACL.865 | Air flow conveyor for re-circulation version (Wall) |
| KACL.866 | Air flow conveyor for re-circulation versions (Island) |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

Plane No-Drop 244 Falmec 245



Lumina NRS

Lumen NRS

Refined details

Falmec's attention to detail and construction capacity is best expressed by Lumina NRS, as is underlined by its steel front frame with perfectly fitted glass panel: a highly prized construction detail that is available in various finishes. With perimeter suction, this hood's glass front also features a distinctive line of light,

Polar

which not only adds further charm, but also helps to create evocative atmospheres in your kitchen.

Mira

Index A-Z

Lastly, Lumina is equipped with our Silence NRS (Noise Reduction System) technology, for an absolutely silent kitchen environment.



Black

247 Lumina NRS

Plane No-Drop Plane Plane NRS Lumina NRS Lumen Lumen NRS Luce Polar Mira Index A— Z



Lumina NRS

Design Falmec Lab



Installation Wall/Island Function Extracting/Filtering **Dimensions** Wall 90 cm/120 cm Island 90 cm

Stainless steel (AISI 304) scotch brite Glass Stainless steel/black Materials/Finishes



NRS technology for a quieter kitchen LED ambient light Features

Touch control Control Speed 3 + boost

Min. speed 37 dB(A) Sound level Max. speed 46 dB(A)

800 m³/h Motor

Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional) **Filters**

Dimmable lighting Lighting

Dynamic Light Strip LED - 2700 K / 5600 K


220-240V 50-60Hz


Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 65 cm

Wall 36/41 kg Island 45 kg Net weight

Energy class Wall B Island C







| Code | Description |
|---------------|---|
| 8034122348162 | Lumina NRS - Wall - 90 cm - Black - 800 m3/h |
| 8034122344898 | Lumina NRS - Wall - 90 cm - Inox - 800 m3/h |
| 8034122348148 | Lumina NRS - Wall - 120 cm - Black - 800 m3/h |
| 8034122344881 | Lumina NRS - Wall - 120 cm - Inox - 800 m3/h |
| 8034122348124 | Lumina NRS - Island - 90 cm - Black - 800 m3/h |
| 8034122344874 | Lumina NRS - Island - 90 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KACL.570#I | Extension chimney H700 Wall - Inox |
| KACL.571#I | Extension chimney H960 Wall - Inox |
| KACL.572#I | Extension chimney H1200 Island - Inox |
| KACL.400 | Silent / Conveyer NRS |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

248 Falmec 249 Lumina NRS Plane NRS

Lumen

Timeless design

One of Falmec's most famous models, with its sleek, technical and ever fashionable design, as well as distinctive visible steel filter, Lumen continues to stand the test of time. An illuminated line on its front provides your kitchen with a pleasant lighting effect.

A powerful motor, with electronic pushbutton panel, guarantees excellent suction performance. In addition, the exclusive NRS (Noise Reduction System) technology equipped version of this hood reduces noise to an absolute minimum.





Plane Plane NRS Plane No-Drop Lumina NRS Lumen Lumen NRS Luce Polar Mira Index A-Z

Lumen

Design Falmec Lab

Wall/Island Installation Extracting/Filtering **Function** Wall 60 cm/90 cm/120 cm **Dimensions** Island 90 cm/120 cm Materials/Finishes

Stainless steel (AISI 304) scotch brite



Features LED ambient light Electronic control Control Remote control (optional) Dialogue system 🛜

Speed 3 + boost Min. speed 49 dB(A) Sound level

Max. speed 62 dB(A) 800 m³/h

Motor Filters

Top filter, removable and washable Charcoal filter


Strip LED (4000K) Lighting 220-240V 50-60Hz Voltage/Frequency


Worktop minimum distance Induction 52 cm / Gas 63 cm

Wall 17/19/23 kg Net weight Island 31/35 kg

Energy class Wall B/C Island C







| Code | Description |
|---------------|---|
| 8034122324289 | Lumen - Wall - 60 cm - Inox - 800 m3/h |
| 8034122324876 | Lumen - Wall - 90 cm - lnox - 800 m3/h |
| 8034122323824 | Lumen - Wall - 120 cm - Inox - 800 m3/h |
| 8034122323336 | Lumen - Island - 90 cm - Inox - 800 m3/h |
| 8034122322872 | Lumen - Island - 120 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.510#I | Extension chimney H700 Wall - Inox |
| KACL.512#I | Extension chimney H960 Wall - Inox |
| KACL.557#I | Extension chimney H1200 Island - Inox |
| KACL.864 | Air flow conveyor for re-circulation version (Wall) |
| KACL.866 | Air flow conveyor for re-circulation versions (Island) |
| 105080053 | Remote control |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

Lumen NRS

Design Falmec Lab

Installation Wall/Island Function Extracting/Filtering Island 90 cm **Dimensions** Wall 90 cm

Materials/Finishes Stainless steel (AISI 304) scotch brite

Features LED ambient light

NRS technology for a quieter kitchen

Control Electronic control Remote control (optional)

Dialogue system

Speed 3 + boost

Min. speed 37 dB(A) Sound level Max. speed 46 dB(A)

Motor 800 m³/h

Top filter, removable and washable **Filters**


Carbon.Zeo Microtech regenerable filter (optional)

Strip LED (4000K) Lighting 220-240V 50-60Hz Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 63 cm

Island 40 kg Net weight Wall 30 kg

Energy class В





| Code | Description |
|---------------|---|
| 8034122362922 | Lumen NRS - Wall - 90 cm - Inox - 800 m3/h |
| 8034122362915 | Lumen NRS - Island - 90 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KACL.570#I | Extension chimney H700 Wall - Inox |
| KACL.571#I | Extension chimney H960 Wall - Inox |
| KACL.572#I | Extension chimney H1200 Island - Inox |
| KACL.400 | Silent / Conveyer NRS |
| 105080053 | Remote control |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

252 Lumen NRS Falmec 253 Lumen

Lumen NRS Luce Polar Mira Index A— Z



Luce

Energy class

Design Falmec Lab

Installation Wall/Island

Function Extracting/Filtering

Dimensions Wall 90 cm
Island 90 cm

Materials/Finishes Stainless steel (AISI 304) scotch brite

Materials/Finishes Stainless steel (AISI 304) scotch brit Glass black



ControlTouch controlSpeed3 + boostSound levelMin. speed 49 or

pund level Min. speed 49 dB(A)
Max. speed 62 dB(A)

Motor 800 m³/h

Filters Top filter, removable and washable Charcoal filter

Lighting Neon light


Neon lighting Wall 90 cm: Neon 1x21 W Island 90 cm: Neon 2x21 W

Voltage/Frequency 220-240V 50-60Hz
Worktop minimum distance Induction 52 cm / Gas 63 cm

Net weight Wall 21 kg Island 32 kg

Wall B Island C



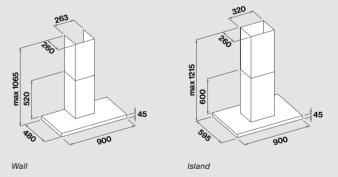

| Code | Description |
|---------------|---|
| 8034122348261 | Luce - Wall - 90 cm - Black - 800 m3/h |
| 8034122348247 | Luce - Island - 90 cm - Black - 800 m3/h |
| Accessories | |
| KACL.510#I | Extension chimney H700 Wall - Inox |
| KACL.512#I | Extension chimney H960 Wall - Inox |
| KACL.557#I | Extension chimney H1200 Island - Inox |
| KACL.864 | Air flow conveyor for re-circulation version (Wall) |
| KACL.866 | Air flow conveyor for re-circulation versions (Island) |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

254 Falmec 255 Luce



Polar

Lumen NRS

Architectural charm

With its clean, minimal design, Polar stands out due to its column shape - an integral part of its structure - and, thanks to various available finishes, it is suited to a range of environments. It can also be installed either on the wall

Luce

Polar

or as an island, thus providing absolute freedom when designing your kitchen. Polar's lower part features a characteristic visible steel filter: a detail that gives it a technological look, recalling professional kitchens.

Mira

Index A— Z





257 Polar

Plane No-Drop Lumina NRS Lumen Lumen NRS Luce Polar Mira Index A— Z



Gold White

Plane NRS

Plane



Copper

Polar

Control Speed

Design Falmec Lab

Installation Wall/Island Function Extracting/Filtering Wall 35 cm Island 35 cm **Dimensions** Materials/Finishes

Painted steel black/white/gold/copper Stainless steel (AISI 304) scotch brite



Electronic control 3 + boost

Min. speed 48 dB(A) Max. speed 65 dB(A) Sound level

Motor 800 m³/h

Metallic grease filter, removable and washable Charcoal filter (optional) Filters

Lighting

Dimmable lighting Dynamic Light LED 3x1,2 W - 2700 K / 5600 K


Voltage/Frequency 220-240V 50-60Hz

Worktop minimum distance Induction 52 cm / Gas 60 cm

Wall 16 kg Net weight Island 21 kg

Energy class Α





| Code | Description |
|---------------|--|
| 8034122369235 | Polar - Evo - Wall - 35 cm - Black - 800 m3/h |
| 8034122369198 | Polar - Evo - Wall - 35 cm - Copper - 800 m3/h |
| 8034122369211 | Polar - Evo - Wall - 35 cm - Gold - 800 m3/h |
| 8034122369228 | Polar - Evo - Wall - 35 cm - Inox - 800 m3/h |
| 8034122369204 | Polar - Evo - Wall - 35 cm - White - 800 m3/h |
| 8034122369181 | Polar - Evo - Island - 35 cm - Black - 800 m3/h |
| 8034122369143 | Polar - Evo - Island - 35 cm - Copper - 800 m3/h |
| 8034122369167 | Polar - Evo - Island - 35 cm - Gold - 800 m3/h |
| 8034122369174 | Polar - Evo - Island - 35 cm - Inox - 800 m3/h |
| 8034122369150 | Polar - Evo - Island - 35 cm - White - 800 m3/h |
| Accessories | |
| 103050091 | Round charcoal filter Ø170 mm - Type 6 |

258 Falmec 259 Polar Lumen

Luce

Mira

Essential volumes

With its geometric lines and monochrome look, the Mira hood is a veritable object of interior design, ideal for the most minimal and rigorously designed kitchens.

Available in a range of finishes and different installation options both on the wall or as an island, this versatile

Plane NRS

hood fits into any space or interior design project. LED lighting with adjustable brightness and tone gives your kitchen a pleasant atmosphere. What's more, Mira features perimeter suction, which is not only highly effective, but also easy to clean.



Falmec



Plane Plane NRS Plane No-Drop Lumina NRS Lumen Lumen NRS Luce Polar Mira Index A— Z





Black White



Inox

Mira

Lighting

Design Falmec Lab

Installation Island/Wall Function Extracting/Filtering Wall 40 cm Island 40 cm **Dimensions**

Materials/Finishes Stainless steel scotch brite Painted steel white/black





Features Perimeter suction Control Electronic control 3 + boost Speed

Min. speed 50 dB(A) Max. speed 61 dB(A) Sound level

Motor 800 m³/h


Metallic grease filter, removable and washable Charcoal filter (optional) Filters

Dimmable lighting Dynamic Light Wall 40 cm: Strip LED - 2700 K / 5600 K Island 40 cm: Strip LED - 2700 K / 5600 K


Voltage/Frequency 220-240V ~ 50-60Hz Worktop minimum distance Induction 53 cm / Gas 60 cm

Wall 16/19/32 kg Net weight Island 32 kg

В Energy class







Wall

Wall telescopic

Island

| Code | Description |
|---------------|---|
| 8034122368436 | Mira - Plus - Wall (Telescopic) - 40 cm - Inox - 800 m3/h |
| 8034122368429 | Mira - Plus - Wall - 40 cm - Black - 800 m3/h |
| 8034122368412 | Mira - Plus - Wall - 40 cm - Inox - 800 m3/h |
| 8034122368405 | Mira - Plus - Wall - 40 cm - White - 800 m3/h |
| 8034122368399 | Mira - Plus - Island - 40 cm - Black - 800 m3/h |
| 8034122368382 | Mira - Plus - Island - 40 cm - Inox - 800 m3/h |
| 8034122368375 | Mira - Plus - Island - 40 cm - White - 800 m3/h |
| Accessories | |
| 103050091 | Round charcoal filter Ø170 mm - Type 6 |
| KACL.865 | Air flow conveyor for re-circulation version (Wall) |
| KACL.866 | Air flow conveyor for re-circulation versions (Island) |

262 Falmec 263 Mira Worktop Built-in Ceiling Island Wall/Island Wall Index A— Z



Wall

Wall-mounted hoods are traditionally the most common type, and ensure optimal extraction of fumes. Combining functionality and aesthetics, they are distinctive detached elements on the kitchen wall that enrich the space with their characteristic designs and materials. Among our wall hoods, the inclined versions guarantee greater ergonomics thanks to a "vertical" design that reduces the overall bulk of the hood itself.

265 Wall

Quasar

Tab

Cover

Discreet beauty

Fusion


The simplicity of the glass front panel, which can be opened, becomes a distinctive contemporary element of Cover. The hood is equipped with a compact vertical motor, to reduce volume and allow a discreet presence

in the kitchen, without compromising on performance. Cover is designed to be controlled directly from Falmec induction hobs, through the Dialogue system technology for easier interaction.





Fusion Verso Verso Easy Verso NRS Tab Quasar Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z

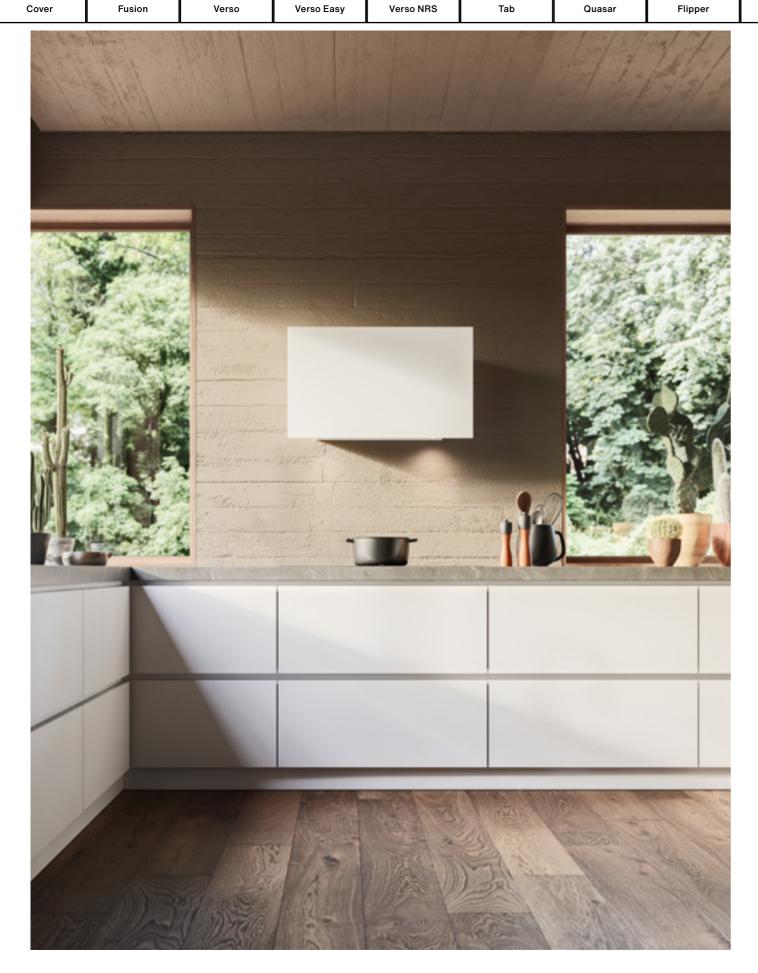

Cover

Design Falmec Lab

Sound level

Installation Wall

Function Extracting/Filtering Dimensions 85 cm

Materials/Finishes

Glass black/white Painted steel black/white

Opening frontal Features

Electronic control Control

Remote control (optional)
Dialogue system

3 + boost Speed

Min. speed 45 dB(A) Max. speed 61 dB(A)

600 m³/h Motor

Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional) Filters


Lighting

Dynamic Light
Dimmable lighting
LED 2x1,2 W - 2700 K / 5600 K 220-240V 50-60Hz

Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 52 cm

18 kg Net weight В Energy class



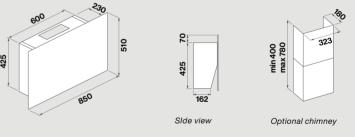

| Code | Description |
|---------------|---|
| 8034122362830 | Cover - Wall - 85 cm - Black glass - 600 m3/h |
| 8034122362823 | Cover - Wall - 85 cm - White glass - 600 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KCCFN.00#N | Kit chimney - Black |
| KCCFN.00#B | Kit chimney - White |
| 105080053 | Remote control |
| | |

268 Falmec 269 Cover



Fusion

Mercurio

Refined linearity

Stream

Mizar

Marte Pro

Zeus Pro

The Fusion hood has a characteristic elegant minimalism - defining geometric lines and the material effect of frosted glass contrast with a glossy profile, which houses its touch pad controls. Its high-performance 800 m3/h motor guarantees suction efficiency and an openable panel increases cooking vapour and fume extraction capacity.

The lower part of the hood has an LED strip with a dynamic, dimmable light that ensures optimal lighting of the cooking area.
Fusion is also available in a filtering version with an exclusive Carbon.Zeo filter, which eliminates odours and moisture, thanks to the natural properties of coal and zeolite.

Elios


Ginevra Boston

Index A— Z



271 Fusion

Flipper NRS Cover Fusion Verso Verso Easy Verso NRS Tab Quasar Flipper Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z

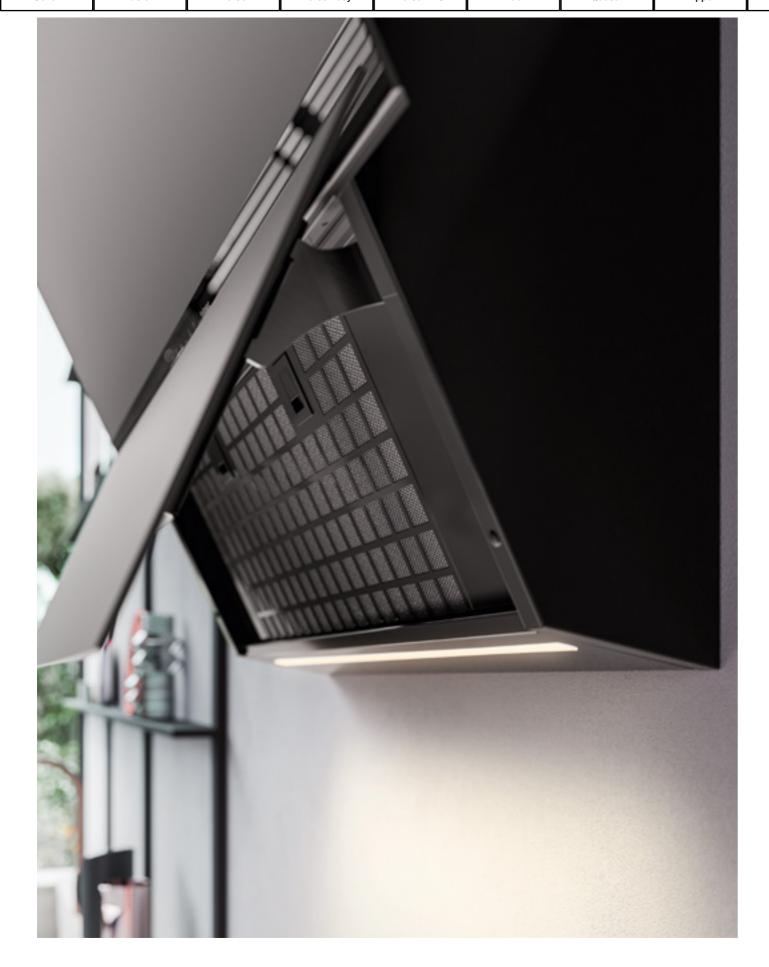

Fusion

Design Falmec Lab

Installation Wall Function

Extracting/Filtering Dimensions 85 cm

Painted steel black Satin glass black Materials/Finishes

Control Touch control

Remote control (optional)
Dialogue system

3 + boost

Speed

Min. speed 49 dB(A) Max. speed 63 dB(A) Sound level

800 m³/h Motor


Metallic grease filter, removable and washable Filters Carbon. Zeo Microtech regenerable filter (optional)

Dimmable lighting Dynamic Light Strip LED 5,8 W - 2700 K / 5600 K Lighting

Voltage/Frequency 220-240V 50-60Hz Worktop minimum distance Induction 52 cm / Gas 52 cm

Net weight 25 kg Energy class Α








Side view





Rear view

| Code | Description |
|---------------|--|
| 8034122366241 | Fusion - Wall - 85 cm - Black - 800 m3/h |
| Accessories | |
| KACL.1039 | Carbon.Zeo Microtech regenerable filter |
| KCQAN.00#N | Chimney - Black |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| 105080053 | Remote control |

272 Falmec 273 **Fusion**



Verso

Mercurio

Sophisticated versatility

Stream

Mizar

Marte Pro

Zeus Pro

An inclined hood that is not only in line with the latest design trends, but which is also extremely versatile, Verso is an aesthetic and functional element suitable for any type of kitchen. Made up of two overlapping glass panels through which the fumes pass, it is available in 55 cm or 85 cm versions, as well as in refined glossy white or black finishes.

The upper panel can be opened and adjusted to suit your suction requirements. An 800 m3/h motor guarantees efficient performance over both the front and the lower parts of the hood. The Easy filtering version of Verso was designed with practical installation in mind, while guaranteeing exceptional effectiveness thanks to its exclusive Carbon.Zeo filters.

Elios


Ginevra Boston

Index A— Z



275 Verso

Fusion Verso Verso Easy Verso NRS Tab Quasar Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z

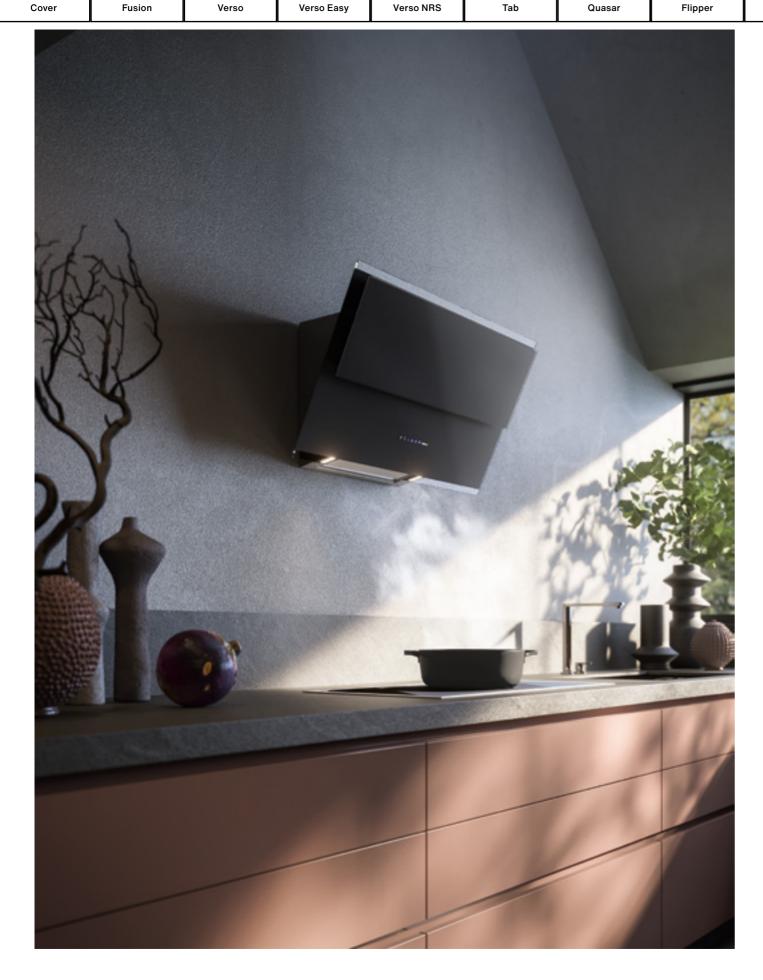

Verso

Design Falmec Lab

Installation Wall

Function Extracting/Filtering Dimensions 55 cm/85 cm Materials/Finishes Glass white/black/grey



Features Opening frontal

Double suction area (frontal and lower)

Remote control (optional)
Dialogue system
Touch control Control

3 + boost Speed

Min. speed 50 dB(A) Sound level Max. speed 65 dB(A)

800 m³/h Motor


Metallic grease filter, removable and washable Carbon.Zeo regenerable filter (optional) Charcoal filter (optional) **Filters**


Dynamic Light Dimmable lighting LED 2x1,2 W - 2700 K / 5600 K Lighting

220-240V ~ 50-60Hz


Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 52 cm

Net weight 16/19 kg Energy class









| Code | Description |
|---------------|--|
| 8034122368634 | Verso - Wall - 55 cm - Black - 800 m3/h |
| 8034122368610 | Verso - Wall - 55 cm - Grey - 800 m3/h |
| 8034122368627 | Verso - Wall - 55 cm - White - 800 m3/h |
| 8034122368665 | Verso - Wall - 85 cm - Black - 800 m3/h |
| 8034122368641 | Verso - Wall - 85 cm - Grey - 800 m3/h |
| 8034122368658 | Verso - Wall - 85 cm - White - 800 m3/h |
| Accessories | |
| 103050091 | Round charcoal filter Ø170 mm - Type 6 |
| KACL.941 | External Carbon.Zeo filter unit for sloped hoods |
| KACL.958#NF | External Carbon.Zeo filter unit for sloped hoods (Black) |
| KCQAN.00#B | Chimney - White |
| KCQAN.00#N | Chimney - Black |
| KCQAN.00#I | Chimney - Inox |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| 105080053 | Remote control |

276 Falmec 277 Verso

Fusion Verso Verso Easy Verso NRS Tab Flipper Flipper NRS Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A-Z Cover Quasar Mercurio

Verso Easy

Design Falmec Lab

Control

Installation Wall **Function** Filtering 55 cm/85 cm **Dimensions** Glass white/black Materials/Finishes



Features Opening frontal

Double suction area (frontal and lower) Conveyer for air outlet included

Remote control (optional)

Dialogue system 🛜 Touch control

Speed 3 + boost

Min. speed 50 dB(A) Max. speed 65 dB(A)

Motor

Metallic grease filter, removable and washable **Filters**

Carbon. Zeo Microtech regenerable filter

Lighting Dynamic Light Dimmable lighting


LED 2x1,2 W - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz

Induction 52 cm / Gas 52 cm Worktop minimum distance

15/18 kg Net weight Energy class



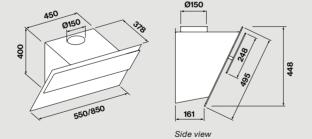

| Code | Description |
|---------------|--|
| 8034122365626 | Verso Easy - Wall - 55 cm - Black - 800 m3/h |
| 8034122365619 | Verso Easy - Wall - 55 cm - White - 800 m3/h |
| 8034122365640 | Verso Easy - Wall - 85 cm - Black - 800 m3/h |
| 8034122365633 | Verso Easy - Wall - 85 cm - White - 800 m3/h |
| Accessories | |
| KACL.1055 | Regenerable Carbon.Zeo Microtech filter (spare part) |
| 105080053 | Remote control |

Verso NRS

Design Falmec Lab

Installation



Function Extracting/Filtering

85 cm **Dimensions**

Glass white/black Materials/Finishes

Wall

Features Opening frontal

Double suction area (frontal and lower) NRS technology for a quieter kitchen

Remote control (optional)
Dialogue system Control

Touch control

Sound level Min. speed 37 dB(A) Max. speed 46 dB(A)

Motor 800 m³/h

Filters Metallic grease filter, removable and washable Charcoal filter (optional)

Dynamic Light

Lighting Dimmable lighting


LED 2x1,2 W - 2700 K / 5600 K

220-240V 50-60Hz Voltage/Frequency

Worktop minimum distance Induction 52 cm / Gas 57 cm

Net weight 33 kg В **Energy class**



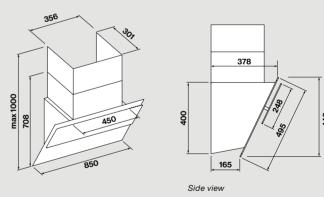

| Code | Description |
|---------------|---|
| 8034122360546 | Verso NRS - Wall - 85 cm - Black - 800 m3/h |
| 8034122360539 | Verso NRS - Wall - 85 cm - White - 800 m3/h |
| Accessories | |
| KACL.959 | High Performance carbon filter |
| KACL.571#B | Extension chimney H960 Wall - White |
| KACL.571#N | Extension chimney H960 Wall - Black |
| KACL.400 | Silent / Conveyer NRS |
| 105080053 | Remote control |

Verso Easy 278 Falmec 279 Verso NRS Quasar

Index A— Z

Tab

Nordic evocations

The soft and minimal shapes of our Tab hood were inspired by Scandinavian design. The front panel, which can be opened to increase suction capacity, incorporates both its controls as well as an LED light, providing optimal lighting of the cooking area. A visible steel metal

anti-grease filter contrasts pleasantly with its painted surface, while the powerful motor ensures excellent suction capacity. Available in two sizes (60 cm and 80 cm), Tab fits into the kitchen wall, adding stylish personality to the environment.



Falmec



Cover Fusion Verso Verso Easy Verso NRS Tab Quasar Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z



Tab

Control

Design Pio & Tito Toso

Installation Wall Function Extracting/Filtering Dimensions 60 cm/80 cm Materials/Finishes Painted steel white/black



LED lighting on body and door Opening frontal Features

Electronic control

3 + boost Speed Sound level


Min. speed 46 dB(A) Max. speed 58 dB(A) Motor 800 m³/h

Top filter, removable and washable Charcoal filter **Filters**

Lighting LED 4x1,2 W - 3200 K Voltage/Frequency 220-240V 50-60Hz Worktop minimum distance Induction 52 cm / Gas 55 cm

17/21 kg Net weight Energy class Α








Side view





Rear view

| Code | Description |
|---------------|---------------------------------------|
| 8034122352053 | Tab - Wall - 60 cm - Black - 800 m3/h |
| 8034122352046 | Tab - Wall - 60 cm - White - 800 m3/h |
| 8034122352107 | Tab - Wall - 80 cm - Black - 800 m3/h |
| 8034122352091 | Tab - Wall - 80 cm - White - 800 m3/h |
| Accessories | |
| KCTCN.001#B | Chimney - White |
| KCTCN.001#N | Chimney - Black |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| | |

282 Tab Falmec 283



Quasar

Mercurio

Formal cleanness

Stream

Mizar

Marte Pro

Zeus Pro

The Quasar hood's simple lines make it a perfect match for minimal and modern furnishing contexts. Available in various colours and sizes, it presents itself as a precious yet discreet object of design. Combined with tempered glass, its

perimeter suction feature guarantees aesthetic uniformity and ease of cleaning. Lastly, a powerful 4-speed motor that can be adjusted according to your needs ensures the highest performance in the extraction of cooking fumes.

Elios

Ginevra Boston

Index A— Z



White 90 cm

285 Quasar



Quasar

Design Falmec Lab

Features

Installation

Function Extracting/Filtering Dimensions 60 cm/80 cm/90 cm/120 cm

Materials/Finishes

Stainless steel (AISI 304) scotch brite Glass black/white

Wall

Perimeter suction



Control Touch control 3 + boost Speed Sound level

Min. speed 46 dB(A) Max. speed 58 dB(A) Motor 800 m³/h

Filters

Metallic grease filter, removable and washable Carbon.Zeo regenerable filter (optional) Charcoal filter


Lighting

Dynamic Light 60 cm: LED 2x1,2 W - 2700 K / 5600 K 80/90/120 cm: LED 3x1,2 W - 2700 K / 5600 K

Voltage/Frequency 220-240V 50-60Hz Worktop minimum distance Induction 52 cm / Gas 57 cm

26/31/33/41 kg Net weight

Energy class








Optional chimney

| Code | Description |
|---------------|---|
| 8034122353982 | Quasar - Wall - 60 cm - Black - 800 m3/h |
| 8034122354002 | Quasar - Wall - 80 cm - Black - 800 m3/h |
| 8034122354033 | Quasar - Wall - 90 cm - Black - 800 m3/h |
| 8034122354019 | Quasar - Wall - 90 cm - White - 800 m3/h |
| 8034122353968 | Quasar - Wall - 120 cm - Black - 800 m3/h |
| Accessories | |
| KACL.941 | External Carbon.Zeo filter unit for sloped hoods |
| KACL.958#NF | External Carbon.Zeo filter unit for sloped hoods (Black) |
| KCQAN.00#N | Chimney - Black |
| KCQAN.00#B | Chimney - White |
| KCQAN.00#I | Chimney - Inox |
| KACL.1059 | Conveyer for air outlet (Ø150) |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

286 Falmec 287 Quasar





Flipper

Stream

Mizar

Marte Pro

Zeus Pro

Elios

Mercurio



Index A— Z

Ginevra Boston

289 Flipper

Cover Fusion Verso Verso Easy Verso NRS Tab Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A-Z Quasar

Flipper

Design Falmec Lab

Lighting

Installation Wall **Function** Extracting/Filtering 55 cm/85 cm **Dimensions** Painted steel white/black Materials/Finishes Satin glass white/black Central stripe steel finishing



Features Opening frontal Electronic control 3 + boost Speed Min. speed 46 dB(A) Sound level Max. speed 58 dB(A)

Motor Filters Metallic grease filter, removable and washable

Carbon.Zeo regenerable filter (optional) Charcoal filter


> Dimmable lighting Dynamic Light

LÉD 2x1,2 W - 2700 K / 5600 K

220-240V 50-60Hz Voltage/Frequency Induction 52 cm / Gas 52 cm Worktop minimum distance


17/25 kg Net weight Energy class











Rear view

Side view

Optional chimney

| Code | Description |
|---------------|--|
| 8034122352213 | Flipper - Wall - 55 cm - Satin Black - 800 m3/h |
| 8034122352190 | Flipper - Wall - 55 cm - White - 800 m3/h |
| 8034122350363 | Flipper - Wall - 85 cm - Satin Black - 800 m3/h |
| 8034122350004 | Flipper - Wall - 85 cm - White - 800 m3/h |
| Accessories | |
| KACL.941 | External Carbon.Zeo filter unit for sloped hoods |
| KACL.958#NF | External Carbon.Zeo filter unit for sloped hoods (Black) |
| KCQAN.00#B | Chimney - White |
| KCQAN.00#N | Chimney - Black |
| KCQAN.00#I | Chimney - Inox |
| KACL.1059 | Conveyer for air outlet (Ø150) |

Flipper NRS

Design Falmec Lab

Control

Lighting

Installation Wall Function

Extracting/Filtering 85 cm **Dimensions**

Materials/Finishes

Painted steel black Satin glass black/white Central stripe steel finishing



Features Opening frontal

NRS technology for a quieter kitchen Electronic control

Speed 3 + boost

Min. speed 37 dB(A) Sound level

Max. speed 46 dB(A)

Motor 800 m³/h

Metallic grease filter, removable and washable **Filters**

Charcoal filter (optional)


Dynamic Light Dimmable lighting


LED 2x1,2 W - 2700 K / 5600 K

220-240V 50-60Hz Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 52 cm

36 kg Net weight Energy class В







| | |
|------|--|
| | |

| Code | Description |
|---------------|---|
| 8034122353739 | Flipper NRS - Wall - 85 cm - Black - 800 m3/h |
| Accessories | |
| 101078897 | High Performance carbon filter |
| KACL.570#I | Extension chimney H700 Wall - Inox |
| KACL.571#I | Extension chimney H960 Wall - Inox |
| KACL.571#N | Extension chimney H960 Wall - Black |
| KACL.400 | Silent / Conveyer NRS |
| | |

Flipper NRS 290 Falmec **Flipper** 291



Mercurio

Mercurio

Every day elegance

Stream

Mizar

Marte Pro

Zeus Pro

Minimal and geometric, with matt black and stainless steel finishes, our Mercurio wall hood is a simple and accessible product, but with the same quality, performance and attention to detail that characterise all Falmec products. Its complete range of functions features LED spotlights that allow you to regulate both light brightness as well as tone, thanks to its Dynamic LED Light technology, thus creating the perfect lighting for all needs and situations. What's more, it is equipped with an integrated receiver allowing it to be controlled via remote/ radio frequency control or directly from Falmec induction hobs using Dialogue System technology.

Elios


Ginevra Boston

Index A— Z



293 Mercurio

Fusion Verso Verso Easy Verso NRS Tab Quasar Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z

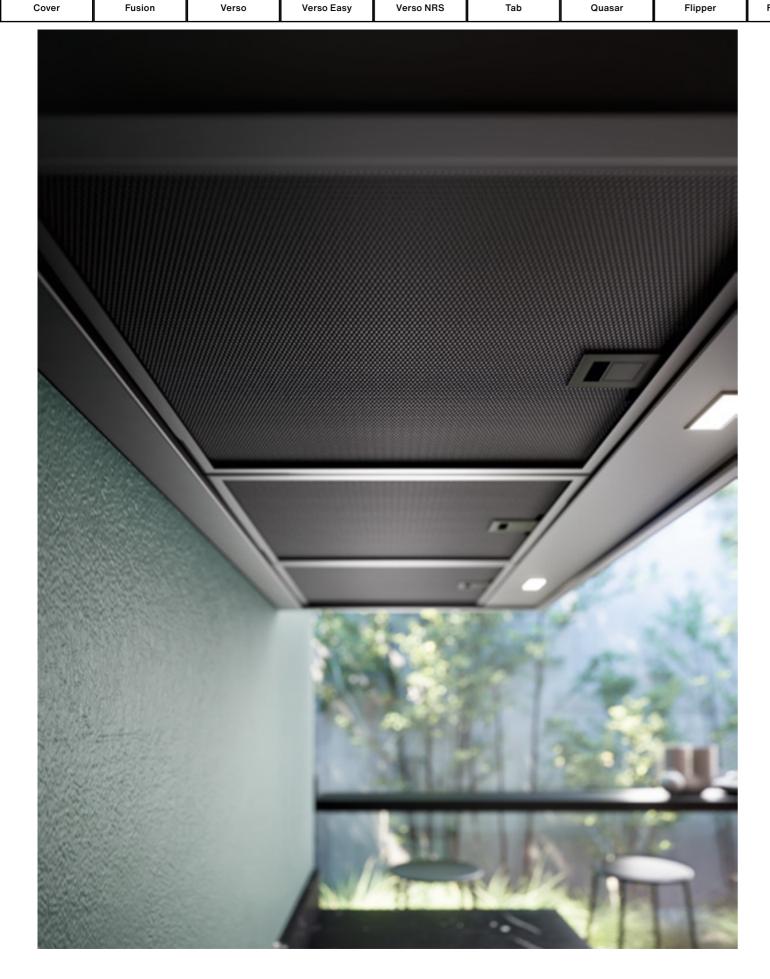

Mercurio

Design Falmec Lab

Lighting

Installation Wall Function Extracting/Filtering

Dimensions 60 cm/90 cm

Stainless steel scotch brite Painted steel black Materials/Finishes



Control Electronic control Remote control (optional)
Dialogue system

Min. speed 47 dB(A) Max. speed 56 dB(A) Sound level

600 m³/h Motor

Metallic grease filter, removable and washable Filters Charcoal filter (optional)


Dimmable lighting Dynamic Light LED 2x1,2 W - 2700 K / 5600 K

220-240V 50-60Hz

Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 63 cm

Net weight 12/14 kg Energy class В





| Code | Description |
|---------------|---|
| 8034122366302 | Mercurio - Plus - Wall - 60 cm - Black - 600 m3/h |
| 8034122366890 | Mercurio - Plus - Wall - 60 cm - Inox - 600 m3/h |
| 8034122365701 | Mercurio - Plus - Wall - 90 cm - Black - 600 m3/h |
| 8034122366883 | Mercurio - Plus - Wall - 90 cm - Inox - 600 m3/h |
| Accessories | |
| 103050107 | Square charcoal filter - Type 3 |
| KACL.512#N | Extension kit h960 - Black |
| KACL.864 | Air flow conveyor for re-circulation version (Wall) |
| 105080053 | Remote control |

294 Falmec 295 Mercurio Cover Fusion Verso Verso Easy Verso NRS Tab Quasar Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z



Stream

Design Falmec Lab

Installation Wall Function Extracting/Filtering

Dimensions 90 cm

Materials/Finishes Stainless steel (AISI 304) scotch brite

Electronic control Control 3 + boost Speed

Sound level

Min. speed 49 dB(A) Max. speed 62 dB(A) 800 m³/h

Motor

Top filter, removable and washable Charcoal filter **Filters**

Dynamic Light Dimmable lighting LED 2x1,2 W - 2700 K / 5600 K Lighting


Voltage/Frequency

220-240V 50-60Hz

Worktop minimum distance Induction 52 cm / Gas 63 cm

17 kg Net weight В Energy class






| Code | Description |
|---------------|---|
| 8034122331317 | Stream - Wall - 90 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.510#I | Extension chimney H700 Wall - Inox |
| KACL.512#I | Extension chimney H960 Wall - Inox |
| KACL.864 | Air flow conveyor for re-circulation version (Wall) |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

296 Falmec 297 Stream

Verso Easy Fusion Verso Verso NRS Tab Quasar Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z

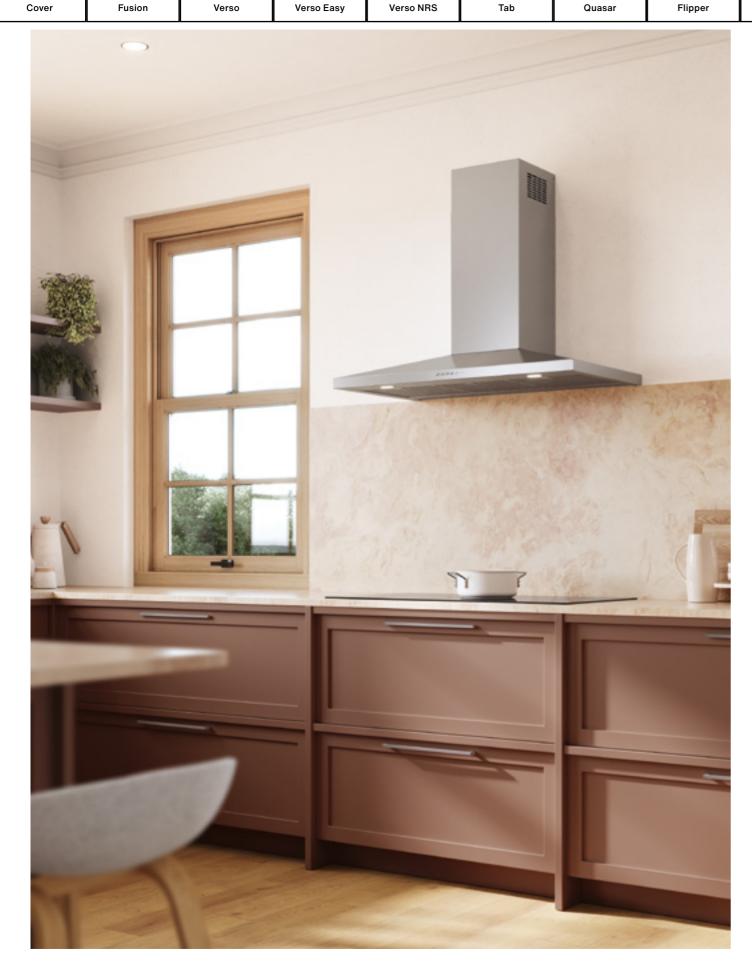

Mizar

Design Falmec Lab

Lighting

Voltage/Frequency

Installation Wall Function Extracting/Filtering

Dimensions 60 cm/90 cm Materials/Finishes

Stainless steel (AISI 304) scotch brite

Electronic control Control 3 + boost Speed

Min. speed 49 dB(A) Max. speed 62 dB(A) Sound level

Motor 800 m³/h

Top filter, removable and washable Charcoal filter **Filters**


Dimmable lighting Dynamic Light LED 2x1,2 W - 2700 K / 5600 K

220-240V 50-60Hz

Worktop minimum distance Induction 52 cm / Gas 63 cm

15/17 kg Net weight В Energy class





| Code | Description |
|---------------|---|
| 8034122325880 | Mizar - Wall - 60 cm - Inox - 800 m3/h |
| 8034122326108 | Mizar - Wall - 90 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.510#I | Extension chimney H700 Wall - Inox |
| KACL.512#I | Extension chimney H960 Wall - Inox |
| KACL.864 | Air flow conveyor for re-circulation version (Wall) |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

298 Falmec 299 Mizar Quasar

Tab

Index A— Z

Marte Pro

Professional flair

Marte Pro is characterised by clean lines and an industrial-style design, which conceals a powerful motor and a battery of professional buffle steel filters. These features make it a product suitable for real cooking lovers, but also for essential

Verso

furnishing contexts that wink at the professional world.

The dynamic and dimmable light also allows the hob lighting to be optimised and adapted to the environment in which it is installed.





Cover Fusion Verso Verso Easy Verso NRS Tab Quasar Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z



Marte Pro

Design Falmec Lab

Installation Wall Function Extracting Dimensions 90 cm/120 cm Materials/Finishes

Stainless steel (AISI 304) scotch brite

Professional Buffle filters with liquid collector Features Electronic control Control

3 + boost Speed Sound level

Min. speed 53 dB(A) Max. speed 64 dB(A)

Motor 950 m³/h

Professional Baffle Filters Filters

Lighting


Dynamic Light Dimmable lighting 90 cm: LED 3x1,2 W - 2700 K / 5600 K 120 cm: LED 4x1,2 W - 2700 K / 5600 K

220-240V 50-60Hz

Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 60 cm

28/33 kg Net weight A/B Energy class





| Code | Description |
|---------------|---|
| 8034122355221 | Marte Pro - Wall - 90 cm - Inox - 950 m3/h |
| 8034122355214 | Marte Pro - Wall - 120 cm - Inox - 950 m3/h |
| Accessories | |
| KACL.1032#IF | Extension chimney H700 Wall - Inox |
| KACL.1033#IF | Extension chimney H960 Wall - Inox |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

302 Falmec 303 Marte Pro Tab

Zeus Pro


Professionalism at home

A combination of typical features found in the hoods of the best restaurants, such as a powerful motor, professional baffle filters and oil collector, Zeus Pros is available in a home version, in order to satisfy your kitchen needs. With its

Verso

rigorous shapes and professional performance, Zeus is the ideal solution for both industrial-style and more modern furnishing environments in which there is a profound passion and taste for cooking.



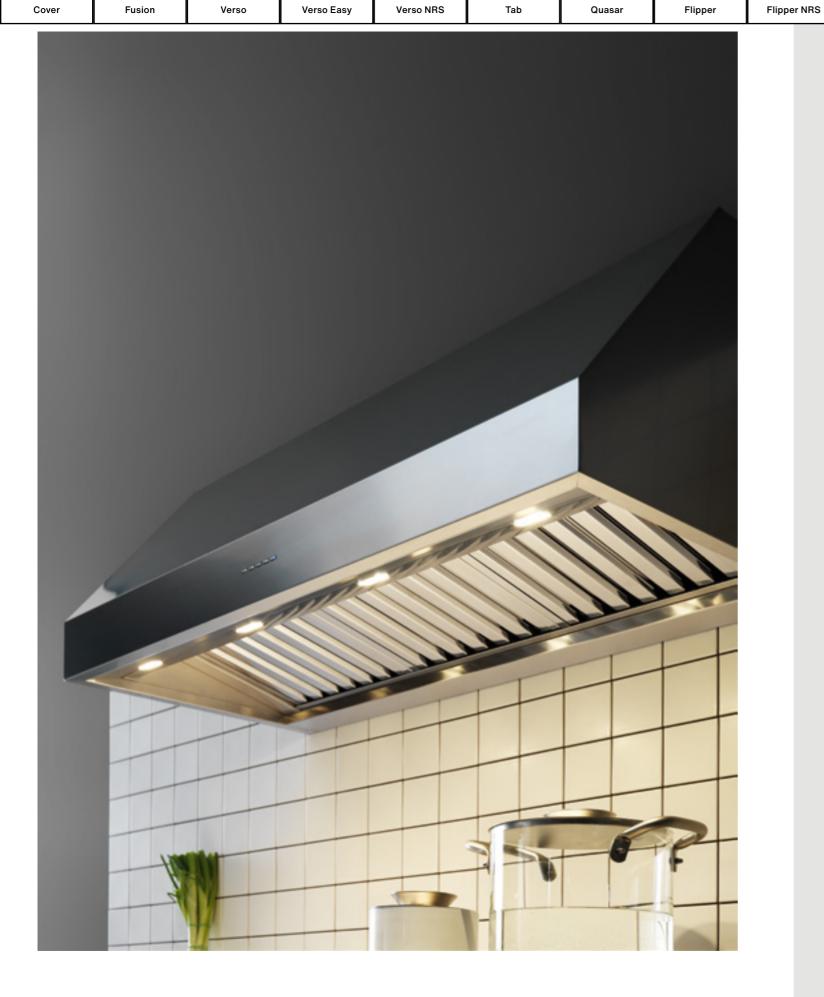

Zeus Pro

Design Falmec Lab

Mercurio

Installation Wall Function Extracting **Dimensions** 90 cm/120 cm Materials/Finishes

Stream

Stainless steel (AISI 304) scotch brite

Mizar

Professional Buffle filters with liquid collector Features Electronic control Control

3 + boost Speed

Min. speed 53 dB(A) Max. speed 64 dB(A) Sound level

Motor 950 m³/h

Professional Baffle Filters Filters

Lighting

Dynamic Light Dimmable lighting 90 cm: LED 3x1,2 W - 2700 K / 5600 K 120 cm: LED 4x1,2 W - 2700 K / 5600 K


220-240V 50-60Hz


Voltage/Frequency Worktop minimum distance Induction 52 cm / Gas 63 cm

25/31 kg Net weight A/B Energy class

KACL.815







| Code | Description |
|---------------|--|
| 8034122355313 | Zeus Pro - Wall - 90 cm - Inox - 950 m3/h |
| 8034122355306 | Zeus Pro - Wall - 120 cm - Inox - 950 m3/h |
| Accessories | |
| KCQAN.00#I | Chimney - Inox |

Protective cleaning cloths for stainless steel (box 10 pcs)

306 Falmec 307 Zeus Pro Fusion Verso Verso Easy Verso NRS Tab Quasar Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z



Elios

Design Falmec Lab

Installation Corner Function Extracting/Filtering **Dimensions** 90 cm/100 cm Materials/Finishes Stainless steel (AISI 304) scotch brite

Electronic control Control 3 + boost Speed Sound level

Min. speed 49 dB(A) Max. speed 62 dB(A)

Motor 800 m³/h

Top filter, removable and washable Charcoal filter **Filters**


Dynamic Light Dimmable lighting LED 3x1,2 W - 2700 K / 5600 K Lighting

Voltage/Frequency 220-240V 50-60Hz

Worktop minimum distance Induction 52 cm / Gas 65 cm

15/19 kg Net weight В Energy class





| Code | Description |
|---------------|---|
| 8034122341781 | Elios - Corner - 90 cm - Inox - 800 m3/h |
| 8034122306322 | Elios - Corner - 100 cm - Inox - 800 m3/h |
| Accessories | |
| KACL.560#I | Extension H850 - Wall |
| KACL.815 | Protective cleaning cloths for stainless steel (box 10 pcs) |

309 308 Falmec Elios Cover Fusion Verso Verso Easy Verso NRS Tab Quasar Flipper Flipper NRS Mercurio Stream Mizar Marte Pro Zeus Pro Elios Ginevra Boston Index A— Z



Ginevra Boston

Design Falmec Lab

Installation

Function Extracting/Filtering **Dimensions** 90 cm

Materials/Finishes

Painted steel anthracite Frontal copper

Wall

Control Speed

Min. speed 49 dB(A) Max. speed 58 dB(A) Sound level

600 m³/h Motor Filters

Metallic grease filter, removable and washable Charcoal filter


LED 2x2 W (2700 K)

Lighting Voltage/Frequency 220-240V 50-60Hz Worktop minimum distance Induction 52 cm / Gas 65 cm

Net weight 18 kg

С Energy class





| Code | Description |
|---------------|---|
| 8034122409948 | Ginevra Boston - Wall - 90 cm - Anthracite - 600 m3/h |

Ginevra Boston 310 Falmec 311

Filtering Anti-odour filters filter table Anti-grease filters filter table Anti-grease filters filter table Anti-grease filters filter table Anti-grease filters for ceiling hoods for ceiling hoods for ceiling hoods for filtering models for

313



Technical notes and accessories

Kitchen ventilation requires careful study that takes in all technical limitations, functional needs and particular aesthetic requirements. In addition to an extremely wide selection of hoods, Falmec also offers a rangeof accessories and solutions that guarantee maximum flexibility when choosing your hood model or type, in order to guarantee complete satisfaction in any situation.

Motors

Index A— Z

Filtration or extraction

1. Extractor hoods

These hoods are equipped with a fan that captures the vapour and sucks it through a metal grease filter before conducting it outside, along with odours and moisture.

Benefits:

- High air flow,
- Humidity is conveyed to the outside,
- Highly efficient even at low speeds.
- Reduced noise when operating (after correct installation),
- No additional cost for activated carbon filters and their periodic replacement.

Disadvantages:

- More complex and not always easy to install,
- Waste of energy due to it being conducted to the outside.

2. Filtering Hoods

These hoods are equipped with a fan that captures the vapour and sucks it through a metal grease filter before conducting it towards an additional filter that eliminates odours.

The clean air is then conveyed back into the room. Recirculation hoods normally work over several filtering cycles, requiring more time. You are therefore advised to leave your hood on for longer (compared to extraction hoods) once you have finished cooking.

Benefits:

- Easy installation and a wider choice of hood,
- No additional structural work,
- Keeping energy within the home environment results in significant energy savings.


Disadvantages (traditional filtration):

- Moisture resulting from cooking vapour is not eliminated.
- Traditional carbon filters need to be replaced frequently.
- In general, filtering solutions are significantly noisier, due to their non-ducted airflow outlets.
- Traditional carbon filters partially obstruct airflow, reducing suction flow rate.

Extractor hoods The air is conveyed out of the house through a pipe.



Filtering hoods. The air is purified as it passes through an active carbon filter and is then redirected inside the room

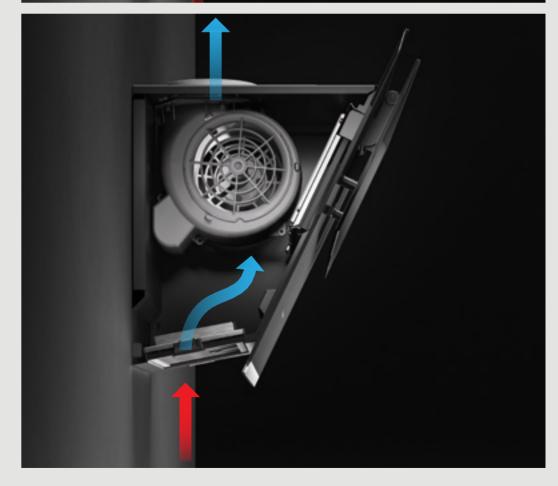

314 315 Falmec Technical notes and accessories Filter table

Installation

Motors

Index A— Z

Filtering innovation

Technologies for better air

Falmec presents exclusive and patented technological solutions for optimal functionality and performance. Falmec hoods, both in filtering and suction mode, meet one of our basic needs: to breathe. In-depth research, detailed design and unique technological solutions allow for optimal performance efficiency, guaranteeing the highest quality air in any space.

The focus on environmental issues and air quality in the home has prompted Falmec to develop its own filtration technologies that can guarantee to us all the benefits derived from recirculation solutions, without compromising suction performance and air sanitisation.

Carbon.Zeo Microtech

Falmec's exclusive combined Carbon.Zeo Microtech filters contain natural materials such as activated carbon and zeolite. to retain odours with maximum effectiveness.

Carbon


Activated carbons are materials containing mainly carbon, in the form of graphite microcrystals, that have been treated in order to obtain a porous structure with a large internal surface area. Thanks to these characteristics, they are able to retain a range of substances, attracting and absorbing their molecules.

Zeolite

Zeolite is a mineral that has a high capacity for absorbing organic compounds and water vapour. A characteristic that is directly derived from its microporous crystalline structure. What's more, thanks to its chemical characteristics, zeolite is able to reduce moisture by releasing heat when coming into contact with it. Zeolite is therefore very important both in reducing odours and absorbing water vapour in the kitchen as a result of cooking.

Long duration

The Carbon.Zeo Microtech combined filter has a very long life: approximately 3 years of normal hood use.







316 317 Technical notes and accessories **Falmec**

Ceiling / Horizontal outlet

Cut-out

Filter table

This accessory allows a filtering version to be installed in all Falmed

ceiling hood models that use the Slim motor. Air is emitted into the

room through the vertical wall of the ceiling lowering,

minimising the aesthetic impact

of the outlet grid.

Filter spare parts KACL.928

Secont Carbon. Ceo €

Filter unit KACL.939#BF Installation

Anti-odour filter kits

1. Ceiling Ceiling filtering unit kit with horizontal outlet

This accessory allows a filtering version to be installed in all Falmec ceiling hood models that use the Slim motor. Air is sucked in, ducted, filtered and reemitted into the environment through an air evacuation kit that fits elegantly into the ceiling in which the hood is installed. This solution combines aesthetic elegance with a remarkable filtering performance thanks to its Carbon.Zeo filter, also permitting considerable energy savings.

Carbon.Zeo ceiling filtering unit kit with vertical outlet

This accessory allows a filtering version to be installed in all Falmec ceiling hood models that use the Slim motor.

Air is emitted into the room through the vertical wall of the ceiling lowering,

Air is emitted into the room through the vertical wall of the ceiling lowering, minimising the aesthetic impact of the outlet grid.

Filter unit KACL.953#BF
Carbon.Zeo
Filter spare parts KACL.931

Outlet grid (included in the kit)

Tutout size grid "the hole must be made using the template provided using the template provided with the content of the ceiling / Vertical output

Ceiling / Vertical output


Ceiling / Vertical output


2. Under base Under base filter unit These filtering solutions are equipped

with Carbon.Zeo technology and are installed below the kitchen plinth to improve the filtering capacity of Falmec products.

Slim under-base filtering unit (60 mm in height)

This solution is designed to obtain better filtration performance even in kitchens with lower plinths of up to 6 cm in height. This solution uses alveolar carbon filtration technology that lasts up to 5 years. We recommend reconditioning your filter annually by placing it in your oven, at a temperature of 160°, for an hour. Each filter can be reconditioned a maximum of 5 times.

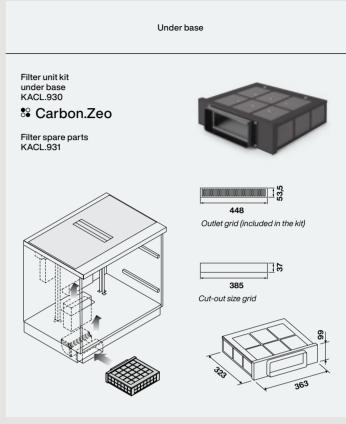

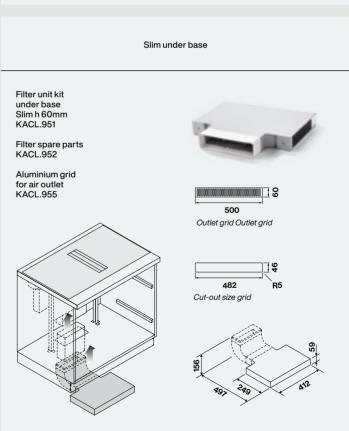


318 Falmec Technical notes and accessories

Filtration Ducting Cooking Anti-odou Installation Conveyers Cooking Installation Anti-odour filters Filter table Anti-grease filters Motors or extraction innovation for ceiling hoods accessories for filtering models installation accessories

Anti-odour filter kits

3. Wall

Wall filtering unit for inclined hoods
This new accessory is designed to
improve the performance of inclined
wall hoods installed in filtering mode.
It can be fitted to the upper part of the
following hood models: Fusion, Verso.
This accessory can also be added to
hoods that have already been installed,
in order to improve performance. The
unit comes in AISI 304 stainless steel or
painted black finishes.

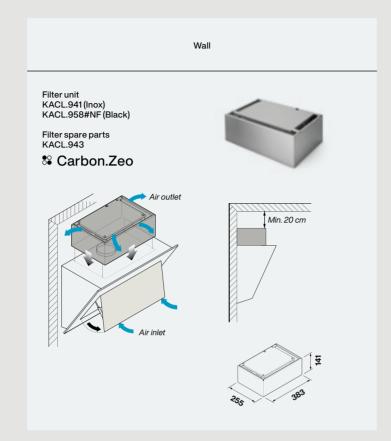

Anti-odour filters

1. Activated carbon filters

Anti-odour filters should only be installed infiltering version hoods.
Activated carbon absorbs cooking odours.

Type 3 (rectangular) cod. 103050107

Type 2 (round) cod. 103050102 (x2)

Type 6 (round) cod. 103050091 (x2)

2. Carbon.Zeo filters

Carbon.Zeo filters contain natural materials such as activated carbon and zeolite, a mineral of volcanic origin, with a crystalline molecular structure that absorbs fumes and bad odours. What's more, zeolite generates heat when it comes into contact with vapour flows, helping to reduce the moisture that is created when cooking.

The Carbon.Zeo combined filter comes with a minimum 3-year guarantee and has an estimated maximum life of 5 years of normal hood use. We recommend reconditioning it every 18 months by placing it in your oven, at a temperature of 200°C, for two hours.

3. Carbon.Zeo Microtech filter

Extensions


Operation


and maintenance

Index A-Z

Carbon.Zeo "Microtech" is a cutting edge solution that consists of carbon and zeolite microspheres integrated into a reticular, porous polyurethane structure which, compared to standard Carbon.Zeo filters, guarantees better filtration performance as well as easier maintenance and reconditioning. This filter must be washed in the dishwasher, without using detergents, on a rapid washing cycle (60 min) at 60°, before being dried in a static oven at a maximum of 50° for 60 minutes. We recommend reconditioning every 4 months (or after 100 hours of use) a maximum of 9 times, resulting in a total lifespan of 3 years, based on intensive hood use.

Anti-odour filters

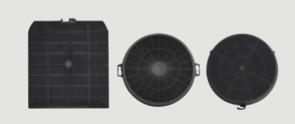





2. Carbon.Zeo filters



3. Carbon.Zeo Microtech filters

320 Falmec 321 Technical notes and accessories

Filter table

| Carbon filters | Carbon.Zeo filters | Carbon.Zeo kit | |
|--------------------|--|---|---------------------------------------|
| | | Kit first installation | Filters (spare parts) |
| - | - | KACL.939#BF (Horiz.) KACL.953#BF (Vert.) | KACL.928 (Horiz.) KACL.931 (Vert.) |
| 103050091 (Type 6) | - | - | - |
| - | KACL:1054 (Microtech) | - | - |
| - | KACL:1037 (Microtech) | - | - |
| - | KACL:1054 (Microtech) | - | - |
| - | KACL.1039 (Microtech) | - | - |
| - | KACL.1048 (Microtech) | - | - |
| - | - | KACL.930 KACL.951* | KACL.931 KACL.952* |
| 103050091 (Type 6) | - | - | - |
| - | KACL.1039 (Microtech) | - | - |
| - | | - | - |
| 103050091 (Type 6) | - | KACL.941 (Inox) KACL.958#NF (Black) | KACL.943 |
| 101078897 | - | - | - |
| - | KACL:1039 (Microtech) | - | - |
| 103050102 (Type 2) | - | - | - |
| 103050091 (Type 6) | - | - | - |
| | - | - | - |
| | - | - | - |
| - | KACL.1039 (Microtech) | - | - |
| 103050091 (Type 6) | - | - | - |
| - | KACL.1048 (Microtech) | - | - |
| - | | - | - |
| - | | - | - |
| - | | - | - |
| - | | - | - |
| 103050107 (Type 3) | - | - | - |
| | - | - | - |
| - | KACL:1039 (Microtech) | - | - |
| - | | - | - |
| - | | - | - |
| - | | - | - |
| - | | - | - |
| 103050107 (Type 3) | - | - | - |
| | - | - | - |
| | KACL.1050 (Microtech) | KACL.939#BF (Horiz.) | KACL.928 (Horiz.) KACL.931 (Vert.) |
| 103050107 (Type 3) | - | - | - NAOL.931(Vert.) |
| - | KACI 1054 (Microtech) | - | - |
| | | | |
| | - 103050091 (Type 6) 103050091 (Type 6) 103050091 (Type 6) 101078897 - 103050091 (Type 6) 103050091 (Type 6) 103050091 (Type 6) 103050091 (Type 6) | | Carbon filters |


| Hood | Carbon filters | Carbon.Zeo filters | Carbonizeo kit | |
|-----------------------------|--------------------|---|---|---------------------------------------|
| nood | Carbon filters | Carbon.Zeo filters | Kit first installation | Filters (spare parts |
| Nube | - | KACL1049 (Microtech) | KACL.939#BF (Horiz.) KACL.953#BF (Vert.) | KACL.928 (Horiz.) KACL.931 (Vert.) |
| Nuvola 90 | - | KACL1049 (Microtech) | KACL.939#BF (Horiz.) KACL.953#BF (Vert.) | KACL.928 (Horiz.) KACL.931 (Vert.) |
| Nuvola 140 | - | KACL1050 (Microtech) | KACL.939#BF (Horiz.) KACL.953#BF (Vert.) | KACL.928 (Horiz.) KACL.931 (Vert.) |
| Parallel | - | KACL.1039 (Microtech) | - | - |
| Plane (Wall/Island) | - | KACL.1039 (Microtech) | - | - |
| Plane NRS (Wall/Island) | - | KACL.1039 (Microtech) | - | - |
| Plane No-Drop (Wall/Island) | - | KACL.1039 (Microtech) | - | - |
| Polar | 103050091 (Type 6) | - | - | - |
| Quantum Pro | - | - | KACL.930 KACL.951* | KACL.931 KACL.952* |
| Quantum Pro Easy | - | KACL.963 | - | - |
| Quasar | 103050091 (Type 6) | | KACL.941 (Inox) KACL.958#NF (Black) | KACL.943 |
| Shelf | - | KACL.1058 (Microtech) | - | - |
| Soffio | - | KACL.1048 (Microtech) | - | - |
| Sophie | - | KACL.1048 (Microtech) | - | - |
| Spazio | - | KACL.1048 (Microtech) | - | - |
| Stella | - | KACL.1049 (Microtech) Hood 90 cm KACL.1050 (Microtech) Hood 120 cm | KACL.939#BF (Horiz.) KACL.953#BF (Vert.) | KACL.928 (Horiz.) KACL.931 (Vert.) |
| Stream | 103050107 (Type 3) | - | - | - |
| Tab | 103050091 (Type 6) | - | - | - |
| Vega | - | KACL.1048 (Microtech) | - | - |
| Verso | 103050091 (Type 6) | - | KACL.941 (Inox) KACL.958#NF (Black) | KACL.943 |
| Verso Easy | - | KACL.1055 (Microtech) | - | - |
| Verso NRS | KACL.959 | - | - | - |
| Vetra | - | KACL.1048 (Microtech) | - | - |
| Vogue | - | KACL.1048 (Microtech) | - | - |
| Virgola | KACL.960 | - | - | - |
| Virgola Touch | - | KACL.1039 (Microtech) | - | - |
| Virgola No-Drop Touch | - | KACL.1039 (Microtech) | - | - |
| Virgola Touch NRS | - | KACL.1039 (Microtech) | - | - |
| Zenith NRS | - | KACL.1039 (Microtech) | - | - |
| Zero | - | - | KACL.930 KACL.951* | KACL.931 KACL.952* |
| Zero Easy | - | KACL.1043 (Microtech) | - | - |

Carbon.Zeo kit

Falmec 323 Technical notes and accessories

^{*}ceramic renewable carbon filter

on Filtering Anti-odour Anti-odour filters filter table Anti-grease filters Installation for ceiling hoods accessories for filtering models installation accessories for filtering models installation accessories

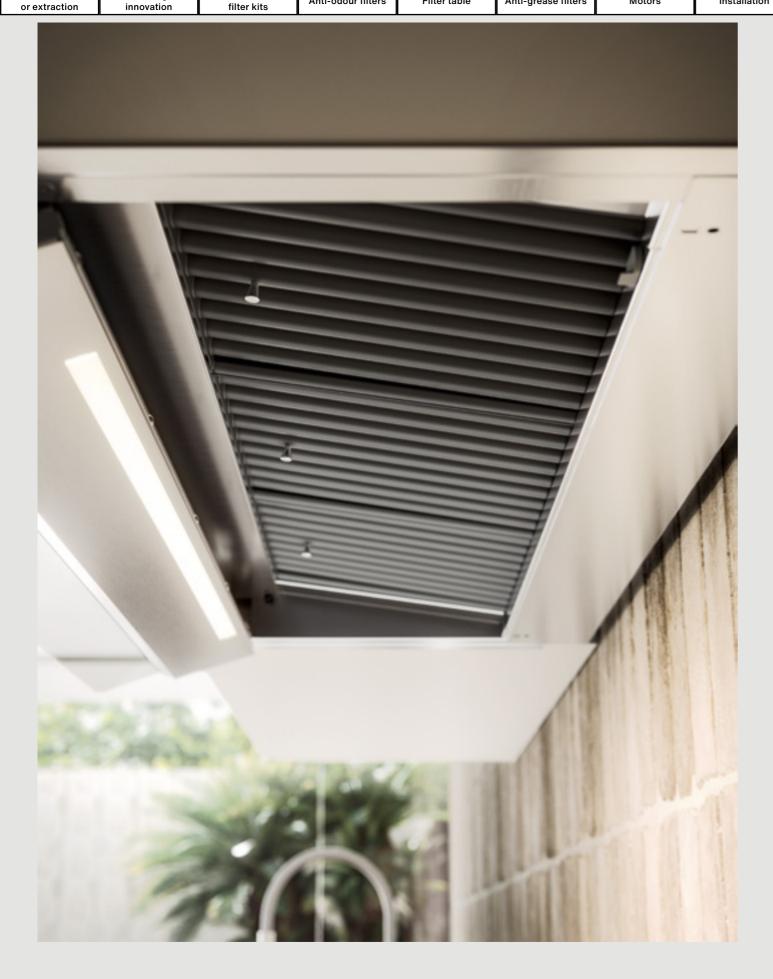

Anti-grease filters

1. Metal Filters (standard)

The basic function of the grease filter is to collect grease resulting from cooking. Falmec metal filters have been designed to ensure excellent grease retention capacity. Therefore, they have an internal multilayer aluminium structure composed of corrugated meshes (allowing for maximum filtering surface area). The frame and the external meshes are made of Scotch Brite steel, a material that maintains a perfect shine over time.

2. Professional Baffle Filters Baffle filters are standard on all our Professional collection hoods. Inspired by the world of professional catering, their particular structure, featuring crossed blades, means that oil and vapour is condensed and delivered to a special container that is easy to remove and wash.

3. Top Filters

Our TOP grease filters have the same high retention characteristics as our metal filters, but feature an external "checkerboard" Scotch Brite steel frame with a smooth surface that facilitates cleaning while at the same time catering for aesthetic needs. Internally, they have a multi-layered structure of steel and aluminium metal meshes designed to achieve an optimal pressure loss/filtering efficiency ratio.

4. No-Drop system filters

No-Drop filters feature innovative technology that finally solves the problem of the formation of condensation caused by cooking vapour, an unpleasant yet common occurrence, especially when using induction hobs.

These technopolymer filters are positioned as a set of crossed blades and are designed to condense cooking vapour that is then conveyed to and collected in a special collector.


Metal anti-grease filters



1. Metal filters



2. Professional Baffle filters



Anti-condensation filter in technopolyme



4. No-Drop system filters

Falmec 325 Technical notes and accessories

Installation

Motors

Air flow / suction capacity
It is important to confirm how much airflow is required, which normally depends on the size of the room and how often the hood is used. Correct airflow can be determined by multiplying the volume of the room by ten, i.e. the recommended number of times that the air should be recycled per hour. For example, the calculation for a kitchen with dimensions of 4m x 4m x 2.7m would be: (4 x 4 x 2.7) x 10 = 432 m3/h. Therefore any hood with a suction capacity of 432 m3/h will provide sufficient ventilation.

Positioning of the motor

Regardless of the position of the motor (internal, remote under-roof or remote external), the extracted airflow will remain constant, in accordance with the amount of friction it encounters along the installation path. There will be a difference in pressure at the entrance and exit of the duct, however the final result will always be the same. Therefore, the installation of a remote motor (under-roof or outdoor) does not affect performance negatively.

800 m³/h motor

Researched and designed to optimise fluid dynamics and, consequently, performance, the 800 m3/h motor provides both excellent suction capacity and energy consumption efficiency (class A). This motor is extremely stable and perfectly balanced due to a double support bracket that holds it in place. Its auger is made of a particular resin with mineral filler: an innovative material that guarantees robustness, solidity and reduced noise.

High Performance Motor

The 950 m3/h High Performance motor offers even more power, guaranteeing higher suction capacity. It is used in Falmec's Professional collection, a range designed to offer professional performance even at home.

Brushless Motor

The brushless motor with electronic control optimises performance in all phases and conditions of operation. Permanent magnets fixed to the motor allowthe hood to absorb energy. Energy consumption, when compared to traditional motors, is reduced by 60% when used at the fourth speed, with maximum capacity, and as much as 90% when operating at the first speed.

Slim moto

The Slim motor's compact dimensions minimise space and allow it to be installed in extremely small spaces. It guarantees excellent performance and a large suction capacity, thanks to a highly efficient double-axial motor. It is particularly suitable for models fitted in false ceilings or within the kitchen's base, such as the Down Draft model.

Standard motors (in hood)

Motors

800 m3/h Motor High Performance Motor



Brushless Motor



Slim Motor 800 m3/h for ceiling hoods: KACL.782#49F



Remote units

Opting for a remote motor is the right choice for those looking to improve hood silence, by moving away from the source of the noise, without compromising suction performance. You can choose between an indoor motor (remote/ under-roof motor), and one fitted to an external wall of the house (external motor). If the hood is already equipped with a motor, it must be removed before installation.

External extractors

Falmec's external motors stand out due to their compact size, high efficiency and installation, which is particularly easy, even when having to protecting them from adverse weathe conditions. They are available as an accessory that is compatible with all models of hoods equipped with an 800 m3/h motor.

Remote under-roof/indoor

These units are available as an accessory for all models equipped with an 800 m3/h motor, and can be installed under the roof or in any space inside the house.

External motors




1000 m3/h 1000 m3/h motor kit. 7 metre power cable. Only suitable for hoods with an 800 m3/h motor. Weight: 13 kg



1500 m3/h 1500 m3/h motor kit. 7 metre power cable. Only suitable for hoods with 800 m3/h motor. Suggested use of ducts 200 mm in diameter. Weight: 15 kg

KACL.796#4AF



Under roof remote motors





950 m3/h motor 950 m3/h motor kit. 7 metre power cable. Only suitable for hoods with 800 m3/h motor (when used as a remote-under roof motor). Weight: 9 kg



1300 m3/h motor 1300 m3/h motor kit. 7 metre power cable. Only suitable for hoods with 800 m3/h motor (when used as a remote-under roof motor). Suggested use with 200 mm diameter pipes. Weight: 14 kg

KACL.797#4AF





Falmec 327 Technical notes and accessories

Filtration or extraction in

Filtering innovation

Anti-odour filters

Filter table

Anti-grease filters

Motors

Installation

1. Distance from the hob

We suggest that installation takes place according to the minimum or maximum distance between the hob and hood, as indicated in each model's corresponding booklet.

2. Dimensions

In order to obtain maximum effectiveness, the suction surface must cover the length of the hob. In any case we recommend a model that is longer than the surface area of the hob itself.

3. Pipes and ducting

Another fundamental aspect concerns the correct installation and the use of appropriate piping for the ducting of fumes. Errors or carelessness in installation can lead to significantly low performance and an increase hood noise levels.

4. Airflow friction

The motor generates airflow through a duct, whose walls cause friction, resulting in decreased performance. For correct installation and optimal operation, it is advisable to:


- use rigid pipes, with a diameter of no less than that indicated;
- limit the air travelling too far (no greater than 7 m) and minimise the number of curves.






Learn more about ceiling installation in filtration mode

Installation options for ceiling hoods

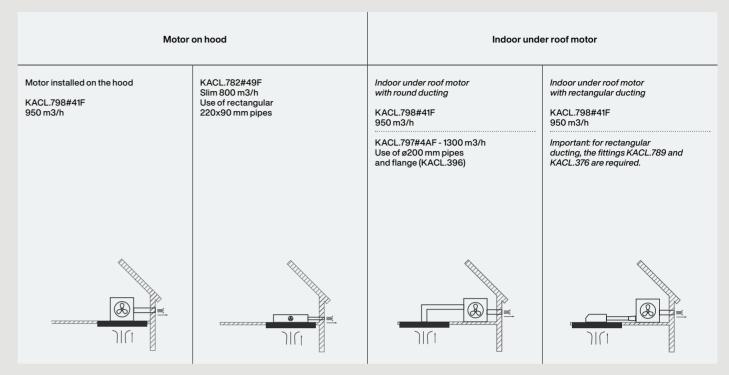

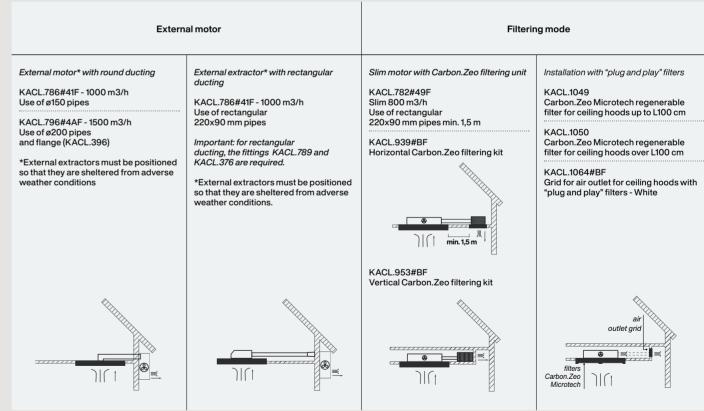

Directable air outlets



329

Standard motor unit 5 directions



4 directions Slim motor unit (Depending on the position of ø200 flange KACL.396





circular/ rectangular connection KACL.376

ø150/220x90

Fittings

Ducting accessories



Conveyers for filtering models

| Hood | Silent / Conveyor NRS KACL.400 | Conveyors Island KACL.866 | Conveyors Wall KACL.864 | Conveyors Wall KACL.865 |
|--|--------------------------------------|---------------------------------|-------------------------------|-------------------------------|
| The conveyor allows (in filtering hoods) a better distribution of the outgoing air, optimising its flow and reducing turbulence, which is often a source of noise. It is only suitable for hood models with 800 m3/h motor equipped with standard carbon filters (type 3 or type 6). | | | | |
| Elle | | • | | |
| Europa 175 | | | | |
| Flipper NRS | • | | | |
| Luce (Island) | | • | | |
| Luce (Wall) | | | • | |
| Lumen (Island) | | • | | |
| Lumen (Wall) | | | • | |
| Lumen NRS | • | | | |
| Lumen Island 175 | | • | | |
| Lumen Island 175 NRS | • | | | |
| Lumina NRS | • | | | |
| Mercurio | | | • | |
| Mira (Island) | | • | | |
| Mira (Telescopic wall) | | | | • |
| Mizar | | | • | |
| Plane (Island) | | • | | |
| Plane (Wall) | | | | • |
| Plane No-Drop (Island) | | • | | |
| Plane No-Drop (Wall) | | | | • |
| Plane NRS | • | | | |
| Stream | | | • | |
| Verso NRS | • | | | |

Index A— Z

The conveyor is available in three versions depending on models for both wall-mounted hoods and for island hoods.
The kit also includes a pipe 300 mm with a 150 mm to direct air to the conveyer.

Falmec 331 Technical notes and accessories


Motors

Cooking installation

In order for the product to function optimally, it must be correctly installed in the kitchen cabinet. In fact, to facilitate this operation, Falmec offers multiple options with and without ducting.

Hobs with integrated suction come with a


series of components, included in the package, designed to assist in the principal assembly needs. In cases that require more complex configurations, a range of tubes and accessory fittings is also available.

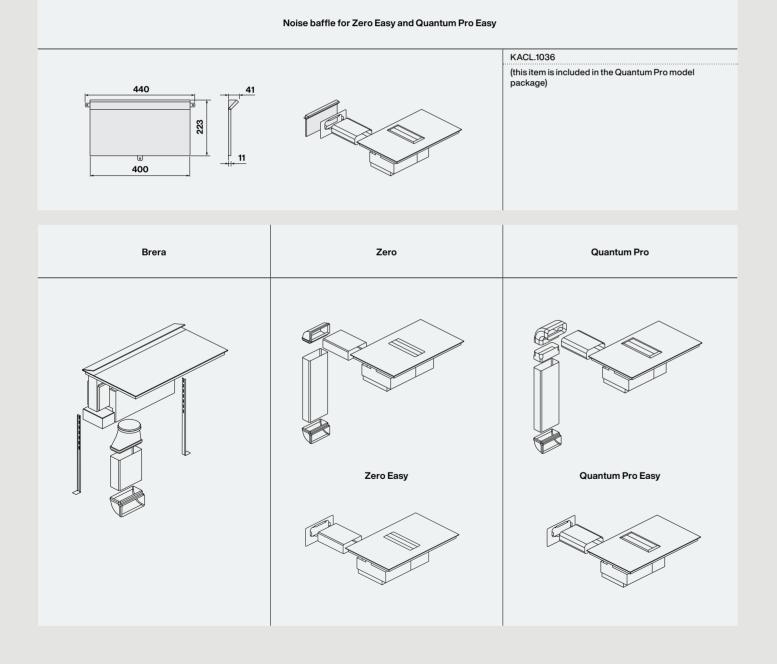

Cooking accessories

Our Cooking collection offers a range of accessories designed to improve your experience when using Falmec induction hobs and extraction hoods. Our grills and premium kitchenware sets are suitable for induction cooking and are able to cater for all your food preparation needs.



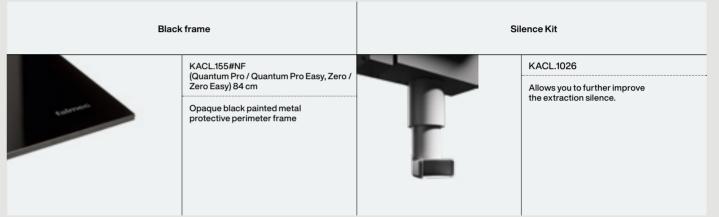



Falmec 333 Technical notes and accessories

Filter table

Motors

Index A— Z

Extensions

Extensions

For kitchens with particularly high ceilings, Falmec offers a solution that allows to maintain the maximum advised distance between the hood and the hob without

compromising on an elegant and aesthetic result. It is possible to choose from various models of chimney extensions.

| | H 700 Wall | H 960 Wall | H 1200 Island |
|--------|---|---|--|
| 201256 | Flipper NRS KACL.570#I (Inox) | Flipper NRS KACL.571#I (Inox) KACL.571#B (White) KACL.571#N (Black) | Elle KACL.557#N (Black) |
| | Luce KACL.510#I (Inox) | | Europa 175 KACL.557#N (Black) |
| | Lumen KACL.510#I (Inox) | KACL.512#I (Inox) | Luce KACL.557#I (Inox) |
| | Lumen NRS KACL.570#I (Inox) | Lumen KACL.512#I (Inox) | Lumen KACL.557#I (Inox) |
| | Lumina NRS KACL.570#I (Inox) | Lumen NRS KACL.571#I (Inox) | Lumen NRS KACL.572#I (Inox) |
| | Marte Pro | Lumina NRS KACL.571#I (Inox) | Lumen Island 175 |
| | KACL.1032#IF (Inox) Mizar | Marte Pro KACL.1033#IF (Inox) | KACL.557#I (Inox) Lumen Island 175 NRS |
| | KACL.510#I (Inox) Plane KACL.1032#IF (Inox) KACL.1032#BF (White) KACL.1032#NF (Black) | Mercurio KACL.512#N (Black) | KACL.572#I (Inox) |
| | | Mizar KACL.512#I (Inox) | KACL.572#I (Inox) |
| | Plane No-Drop | Plane KACL.1033#IF (Inox) KACL.1033#BF (White) KACL.1033#NF (Black) | Plane KACL.557#I (Inox) KACL.557#N (Black) |
| | KACL.570#I (Inox) KACL.1032#NF (Black) | | Plane No-Drop KACL.557#I (Inox) |
| | Plane NRS KACL.570#I (Inox) | Plane No-Drop KACL.571#I (Inox) | KACL.557#N (Black) |
| | Stream KACL.510#I (Inox) | KACL.1033#NF (Black) Plane NRS | Plane NRS KACL.572#I (Inox) KACL.572#N (Black) |
| | | KACL.571#I (Inox) KACL.571#N (Black) | |
| | | Stream KACL.512#I (Inox) | |
| | | Verso NRS KACL.571#B (White) | |
| | | | |

Operation and maintenance

Remote control

In order to operate all its ceiling models in maximum comfort, Falmec offers free remote control with a display that allows you to manage the different functions of the hood. Cod. 105080053



Steel cleaning

Falmec uses only materials of the highest quality to create its hoods. For this reason it is important to care for them using the most suitable products, in order to guarantee a perfect finish and long-lasting wear. For models created in stainless steel. Falmec has created unique cleaning wipes that give extra shine to your hood. They are impregnated with a special mix of oils that prevent dirt particles from being deposited and prevent fingerprints marks, giving a clean, shining finish. The hood can be washed with hot water and a neutral detergent. Once dry, simply wipe down with Magic Steel wipes in the direction of the satin finish, buff with a soft cloth (still in the direction of the finish) and leave to dry.

Magic Steel protective wipes for stainless steel surfaces. KACL.815 (box 10 pz)

334 Falmec 335 Technical notes and accessories

Falmec S.p.A

via dell'Artigianato, 42 z.i. 31029 Vittorio Veneto Treviso — Italy info@falmec.com falmec.com **Images**

Nudesign / Neiko / Eye Studio

Photography and styling
Eye Studio / Beppe Mangia

Graphic design Designwork

Texts editing
Daniele Varelli

Post-production photos and colour separation Luce Group

Printed in Italy ©May 2025

Falmec declines all responsibility for any inaccuracies contained in this catalogue that are due to typos and copying errors.

Falmec Spa hereby reserves the right to make - at any moment and without prior notice - all the technical, aesthetic and fuctional alterations to the products that it believes necessary for their improvement.

Models, images and technical solutions presented in this catalogue are protected by industrial property rights.

The printing process does not always permit a faithful reproduction of original tones and materials.

This catalogue is the exclusive property of Falmec Spa. All rights are reserved. Any form of total or partial reproduction of this catalogue is stricty forbidden.

336 Falmec

